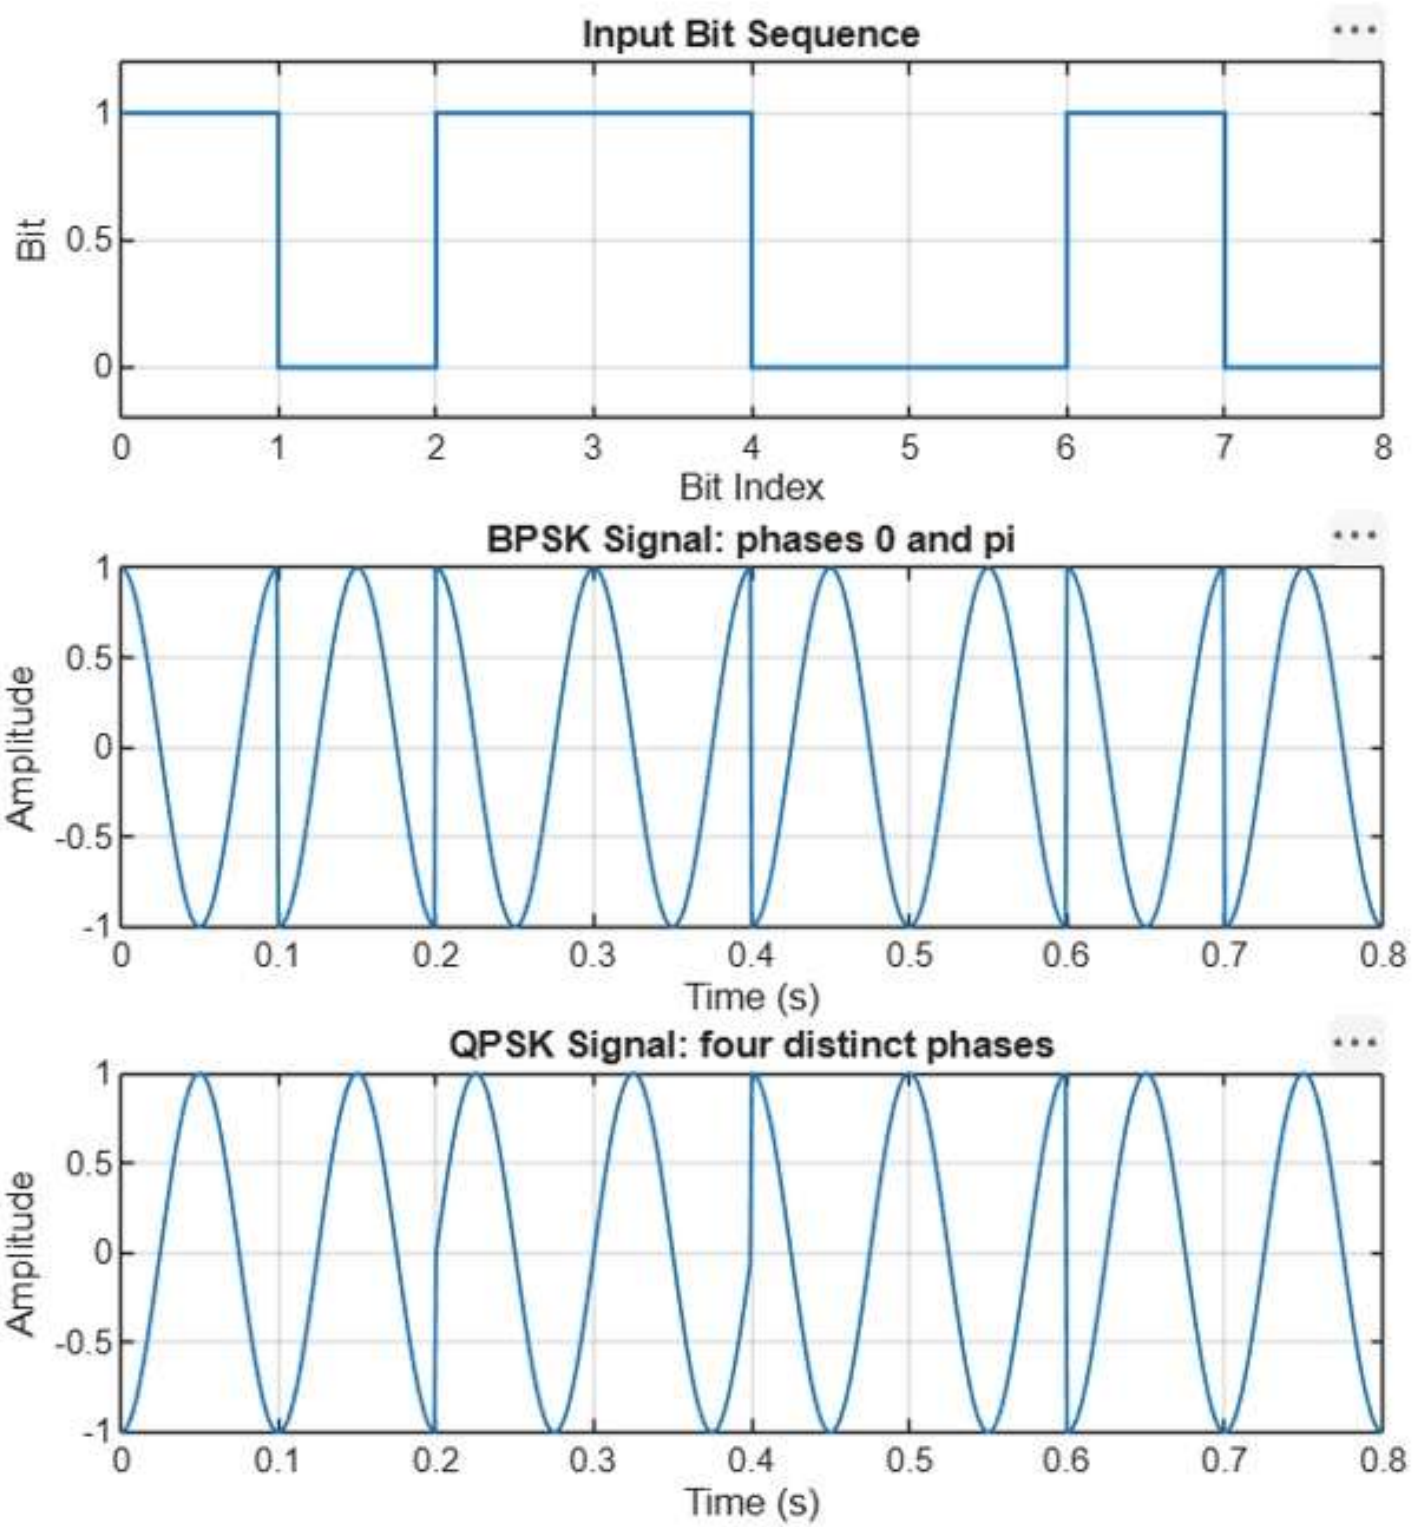
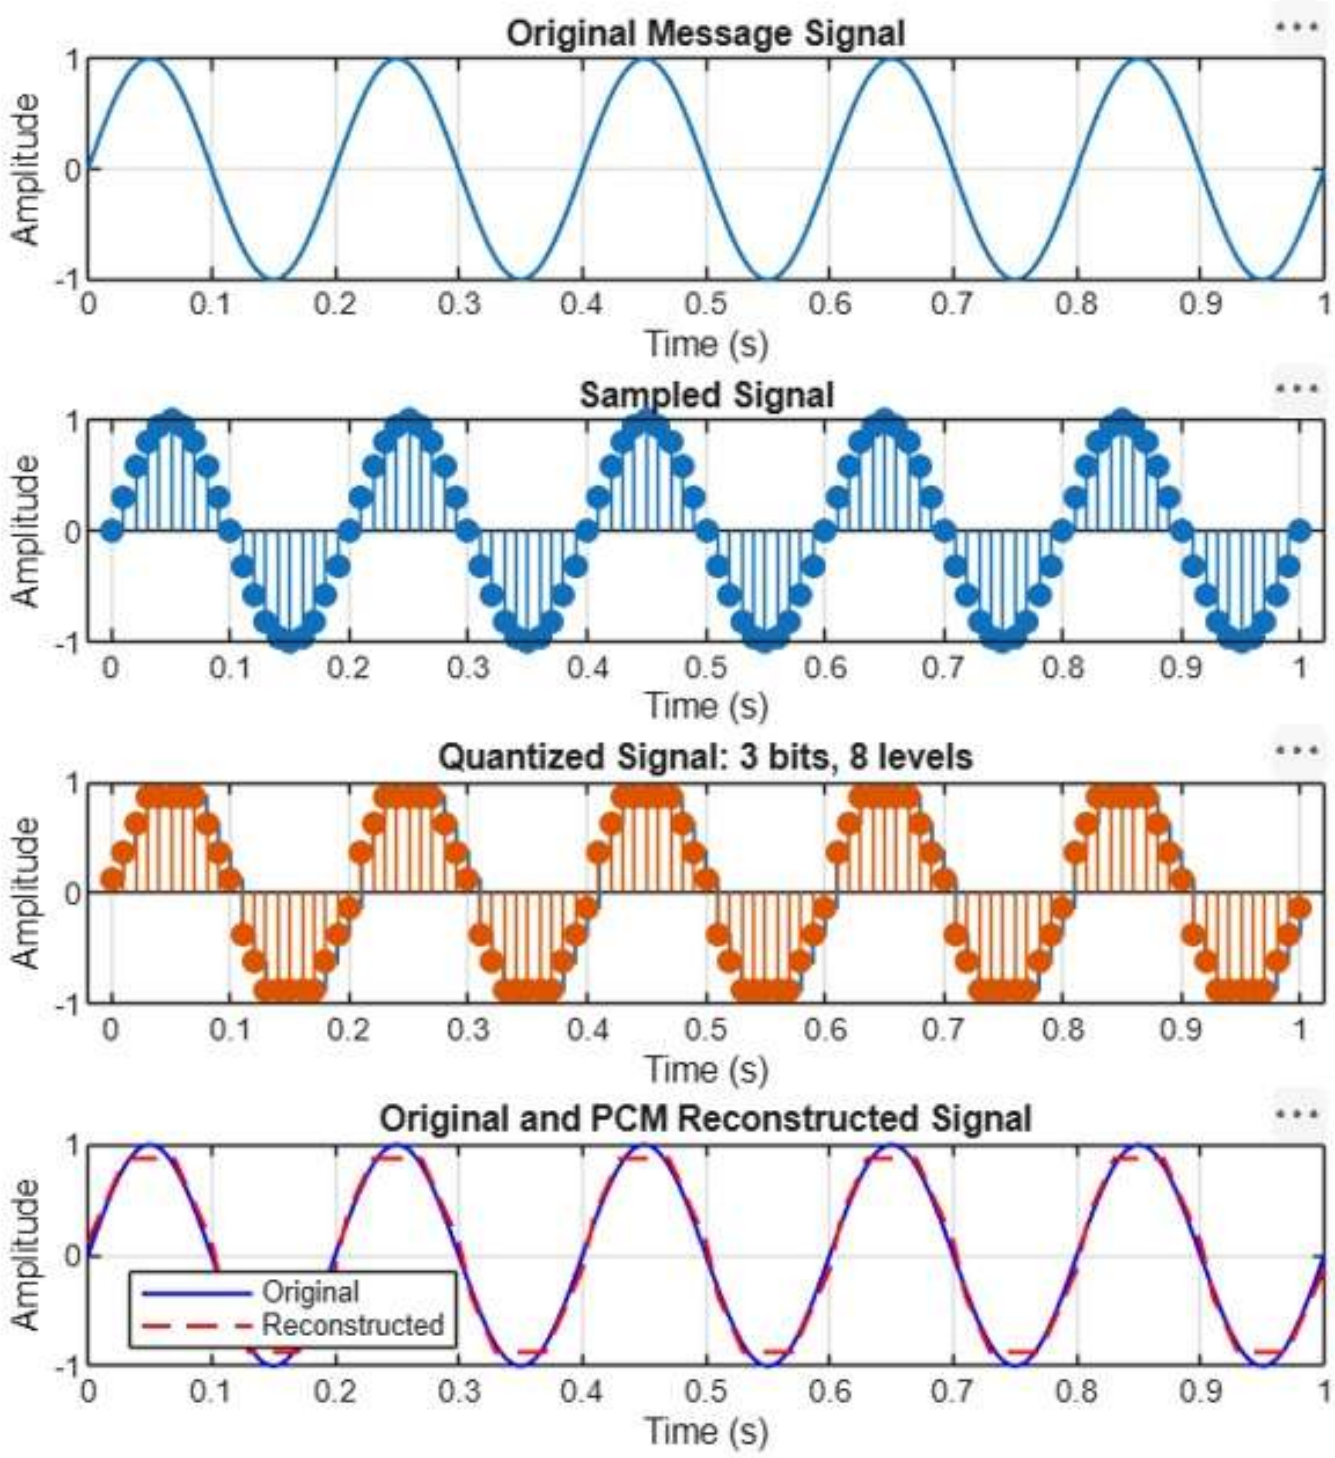
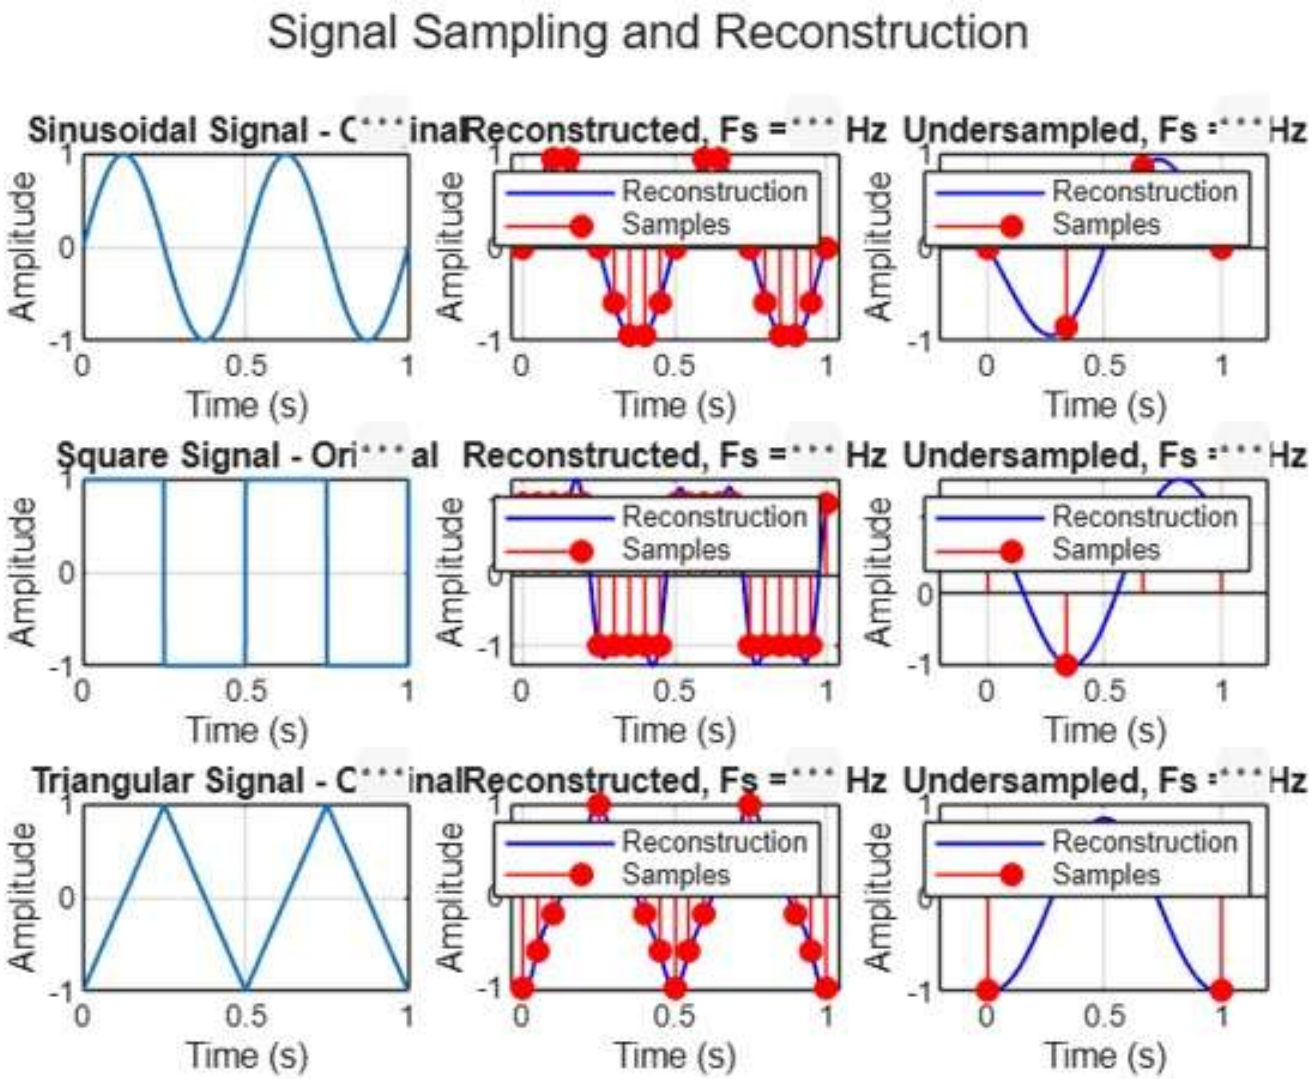

Input Bit Sequence
Bit
Bit Index
BPSK Signal: phases 0 and pi
Amplitude
Time (s)
QPSK Signal: four distinct phases
Amplitude
Time (s)


Original Message Signal
Amplitude
Time (s)
Sampled Signal
Amplitude
Time (s)
Quantized Signal: 3 bits, 8 levels
Amplitude
Time (s)
Original and PCM Reconstructed Signal
Amplitude
Original
Reconstructed
Time (s)


Signal Sampling and Reconstruction
Sinusoidal Signal - C***inal
Reconstructed, Fs = *** Hz
Undersampled, Fs = *** Hz
Square Signal - Ori***al
Reconstructed, Fs = *** Hz
Undersampled, Fs = *** Hz
Triangular Signal - C***inal
Reconstructed, Fs = *** Hz
Undersampled, Fs = *** Hz
Amplitude
Time (s)
Reconstruction
Samples