# WB6132-R FLUX CORED WELDING WIRE

| | |
|---|---|
| **Classifications** | **AWS A5.29:** E111T1-GM-JH4 **EN ISO 18276-A:** T69 6 Z P M21 1 H5<br>**AWS A5.36:** E111T1-M21A8-GM-JH4 |
| **Product Description** | Rutile, copper coated, seamless tubular, flux cored, welding wire. Fully positional. |
| **Applications** | WB6132-R is ideal for general fabrication applications and high integrity applications. Seamless tubular technology & copper coating ensures very low weld metal hydrogen levels (<3ml/100g) coupled with excellent current tip transfer. Excellent welder appeal including deslag and low spatter levels.<br>Widely used for the welding of steels with a tensile strength of 810/930 N/mm², such as S690QL1, RQT600, HY80, NAXTRA 70 and T1. |

| **Wire Composition (Wt. %)** | C | Mn | Si | S | P | Cr | Ni | Mo | Cu | Al |
|---|---|---|---|---|---|---|---|---|---|---|
| **min.** | 0.03 | 1.40 | 0.20 | - | - | - | 1.75 | 0.10 | - | - |
| **max.** | 0.08 | 2.00 | 0.60 | 0.025 | 0.025 | 0.15 | 2.40 | 0.30 | 0.30 | 0.10 |

**Typical All-Weld Metal Mechanical Properties**

| | | | |
|---|---|---|---|
| Ultimate Tensile Strength | N/mm² | *809 | **774 |
| Yield Stress/0.2% Proof Stress | N/mm² | *769 | **720 |
| Elongation on 5D | % | *23 | **26 |
| Impact Energy CV @ -50°C | Joules | *65 | **55 |

*As welded
** stress relieved @690°C/1 Hr

| **Wire Dia. (mm)** | | 0.6mm | 0.8mm | 1.0mm | 1.2mm | 1.6mm | 2.4mm | 3.2mm |
|---|---|---|---|---|---|---|---|---|
| **Current Range (Amps)** | **min.** | - | - | 150 | 160 | 180 | - | - |
| | **max.** | - | - | 240 | 280 | 380 | - | - |
| **Volt Range (Volts)** | **min.** | - | - | 17 | 18 | 20 | - | - |
| | **max.** | - | - | 24 | 26 | 29 | - | - |
| **Packaging Information**<br>**Kg Per Reel** | | - | - | 16 | 16 | 16 | - | - |

| | |
|---|---|
| **Storage** | **Storage**<br>It is recommended that the WB range of wires are stored in a dry heated store at a minimum temperature of 18°C, and a maximum relative humidity of 60%. |
| **Gases** | **Gas** CO$_2$ or Argon/CO$_2$ mixture<br>**Flow Rate** 15-20 L/min |

**Current Conditions DC+ and Welding Positions**

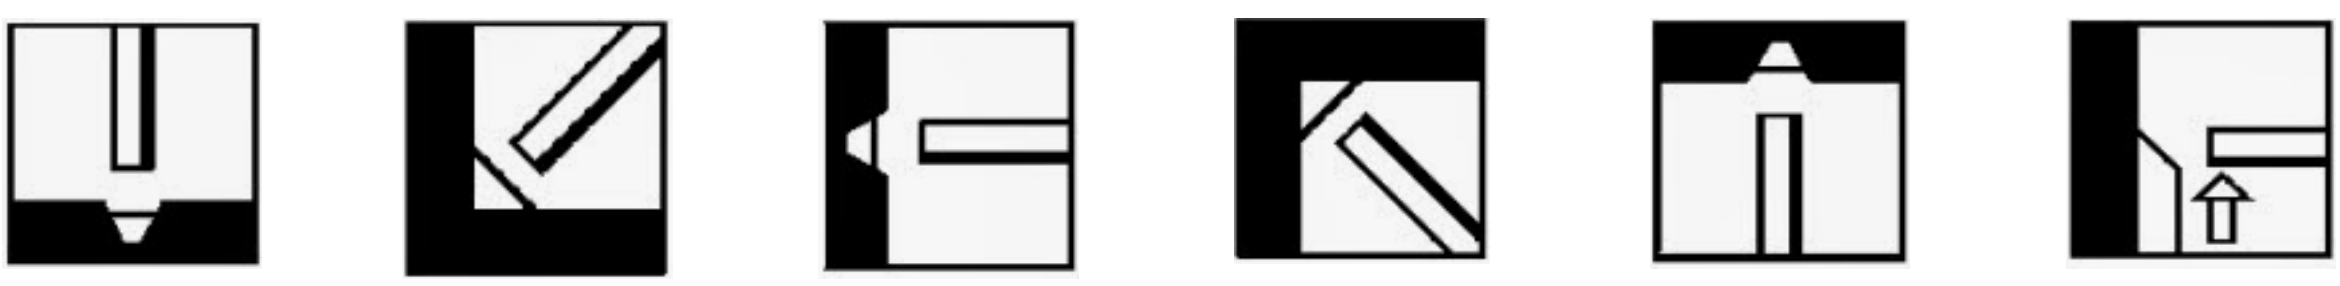

**Approvals:** LR (4Y69S), CE

www.wballoys.co.uk