



D-SUB Connector Right Angle Type Male/Female

MALE

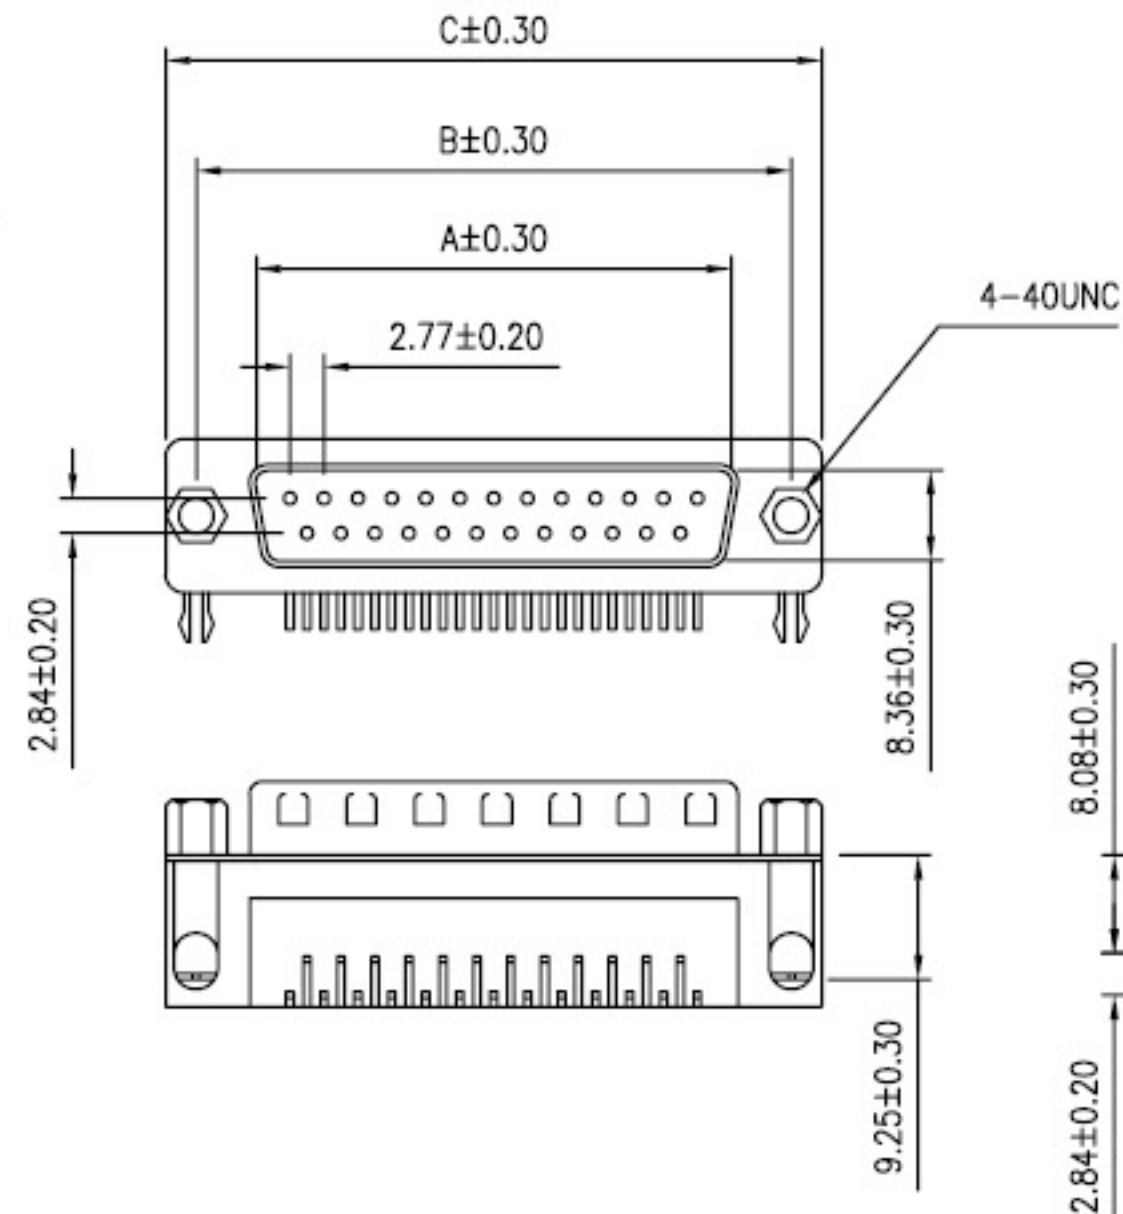

FEMALE

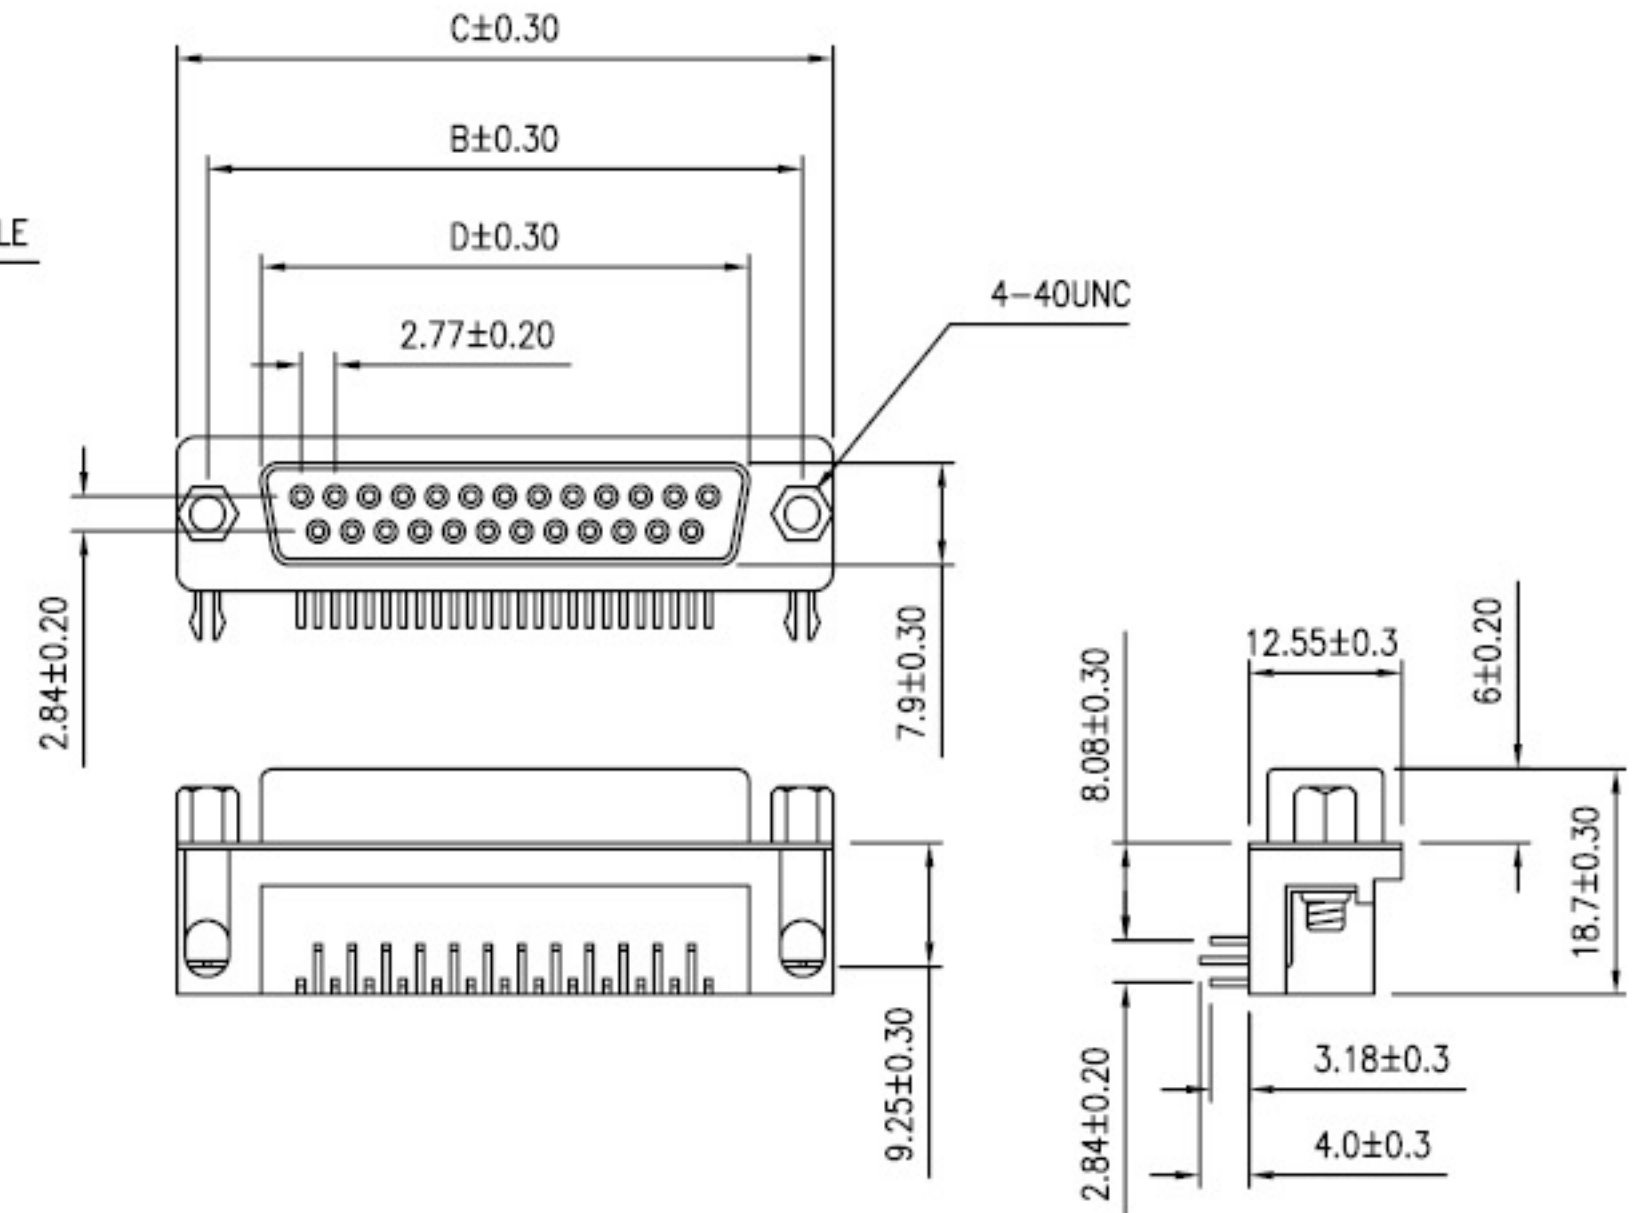


SPECIFICATION

- * Current Rating:
5 A
- * Withstanding Voltage:
1000 VAC (1 min.)
- * Insulation Resistance:
1000 Megohms MIN.
- * Contact Resistance:
30 Milliohms MAX.
- * Operating Temperature:
-40°C to +85°C

MATERIAL

- * Contact: Brass , Selective Gold
or All Gold
- * Insulator: PBT & 30% G. F.
- * Shell: Stell , Tin Plated

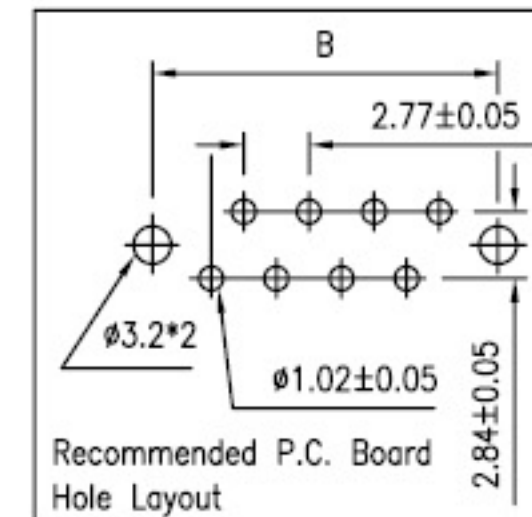

PART NO.	A	B	C	D
DS11-X-09-S1	16.92	24.99	30.81	16.33
DS11-X-15-S1	25.25	33.32	39.14	24.66
DS11-X-25-S1	38.96	47.04	53.04	38.38
DS11-X-37-S1	55.42	63.50	69.32	54.84

ELEPARTS CO., LTD

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT: MM	D-SUB CONNECTOR	APP BY:
0.000±		Right Angle Type (.318")	CHK BY:
		MATL: PBT + 30% G.F.	DR BY:
		DWG. NO. DS11	

ELEPARTS

E-BUSINESS