

EC350V - 3.5mm - : 010100150



\* (Plugs)

\* 가

\*EC350V, 3.50 mm, 300V, 8A

### (Product Features)

\* EC&ESD 3.50mm, 3.81mm, 5.00mm, 5.08mm, 7.50mm 7.62mm (pitch)

\* UL VDE IEC60998 UL1059

### (Key information)

	3.50 mm
	300V
	8A
	02POLE
가	02P~24P

#### Technical Data

Pitch	3.50 mm
Rated voltage	300V
Rated current	8A
Conductor cross - section, solid	28~14
Conductor cross - section,flexbl	28~14
Rated surge voltage(UL)	1.6
Torque	0.19

**DONGYANG ELECTRIC IND**

TEL: 02 - 716 - 6737~8 FAX: 02 - 701 - 8424 E - mail: webmaster@dongyangele.co.kr www.dongyangele.co.kr

Specifications are subject to change without notice. Specifications in this catalog are just for reference. The detail specification and drawing sheets will be provided upon request. Copyright. 2013 DONGYANG Electronic Inc. All rights reserved


Screw

M2

Wire strip length

6~7mm

### Drawing

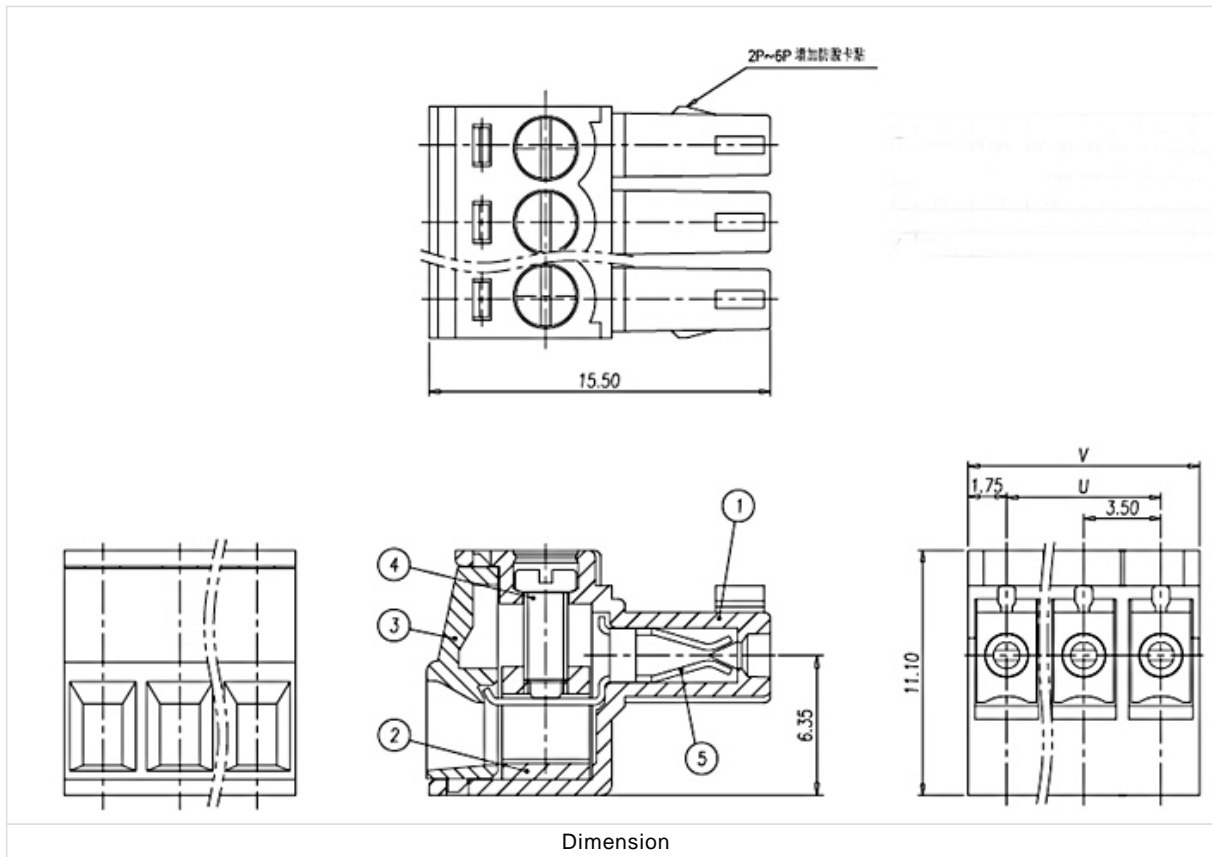

Normal Geometric Tolerancing					
—     //		≡	⊥		
0 to 100	0.2	0.3	0 to 10	0.2	
over 100 to 150	0.3		over 10	0.3	
over 150	0.5				
Total Pitch Tolerances		Normal dimension Tolerances			
0<U≤30	±0.20		0~30	±0.25	
30<U≤53	±0.25		over 30~53	±0.30	
53<U≤70	±0.30		over 53~70	±0.35	
70<U≤90	±0.35		over 70~90	±0.44	
90<U≤115	±0.44		over 90~115	±0.55	
115<U≤150	±0.55		over 115~150	±0.70	

Tolerance data

Tolerance data

**DONGYANG ELECTRIC IND**

TEL: 02 - 716 - 6737~8 FAX: 02 - 701 - 8424 E - mail: webmaster@dongyangele.co.kr www.dongyangele.co.kr

Specifications are subject to change without notice. Specifications in this catalog are just for reference. The detail specification and drawing sheets will be provided upon request. Copyright. 2013 DONGYANG Electronic Inc. All rights reserved

5	SOLDER PIN	COPPER ALLOY	Tin Plated
4	SCREW	STEEL	M2/Zn Plated
3	COVER	PA66	UL94-V0 GREEN
2	WIRE CAGE	COPPER-ALLOY	M2/Ni Plated
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

Material Data