

Jashore University of Science and Technology

Jashore-7408, Bangladesh



EV Charging Load Demand Prediction Using Machine Learning in a SUMO-Based Simulation Environment

Submitted By:

Rakesh Biswas

Student ID: 200112

Registration Year: 2022

Academic Year: 2020–2021

Supervisor:

Monishanker Halder

Assistant Professor, Department of CSE

Jashore University of Science and Technology

This thesis report was submitted in fulfillment of the

Requirements for the Bachelor's Degree

In Computer Science and Engineering

Faculty of Computer Science and Engineering

February 2026

Jashore University of Science and Technology

Jashore-7408, Bangladesh



This thesis entitled **“EV Charging Load Demand Prediction Using Machine Learning in a SUMO-Based Simulation Environment”** submitted by **Rakesh Biswas**, Student ID: 200112, has been accepted as satisfactory in fulfillment of the requirements for the degree of Bachelor of Science in Computer Science and Engineering.

Signature of the Student

Rakesh Biswas

Signature of the Supervisor

Dedication

*To my beloved parents, whose endless love, sacrifice, and encouragement
have been the cornerstone of every achievement in my life.*

*To my teachers, who ignited the flame of curiosity within me
and guided me towards the pursuit of knowledge.*

*And to all the researchers and engineers working tirelessly
towards a sustainable, electrified future of transportation.*

Acknowledgments

First and foremost, I would like to express my deepest gratitude and sincere thanks to my supervisor, **Monishanker Halder**, for his invaluable guidance, constant encouragement, and expert advice throughout this research. His/her constructive feedback and unwavering support were pivotal in shaping this work.

I extend my appreciation to the faculty members of the Department of Computer Science and Engineering (CSE) at Jashore University of Science and Technology (JUST) for providing an intellectually stimulating environment and for their continued support during my graduate studies.

Special thanks are due to my fellow graduate students and labmates for their camaraderie and many productive conversations. I also wish to acknowledge the open-source communities behind Simulation of Urban Mobility (SUMO), Python, scikit-learn, and XGBoost, whose tools formed the backbone of this research.

Finally, I owe immeasurable gratitude to my family for their patience, prayers, and moral support. This work would not have been possible without them.

Rakesh Biswas

Department of CSE, JUST

February 2026

List of Abbreviations

CSE Computer Science and Engineering.

DT Decision Tree.

EV Electric Vehicle.

FIFO First In First Out.

JUST Jashore University of Science and Technology.

LR Linear Regression.

MAE Mean Absolute Error.

ML Machine Learning.

R² Coefficient of Determination.

RF Random Forest.

RMSE Root Mean Square Error.

SOC State of Charge.

SUMO Simulation of Urban Mobility.

TraCI Traffic Control Interface.

XGB Extreme Gradient Boosting.

Table of Contents

Dedication	i
Acknowledgments	ii
Abstract	ix
Chapter 1: Introduction	2
1.1 Background	2
1.1.1 Simulation of Urban Mobility	3
1.2 Problem Statement	3
1.3 Objectives	4
1.4 Research Questions	4
1.5 Significance of the Study	5
Chapter 2: Literature Review	7
2.1 EV Charging Load Modeling	7
2.2 Machine Learning for Load Forecasting	7
2.3 SUMO-Based EV Simulation	8
2.4 Smart Charging and Recommendation Systems	8
2.5 Research Gaps	9
Chapter 3: Methodology	11
3.1 Research Design	11
3.2 Simulation Environment	11
3.2.1 Network Topology	11
3.2.2 Charging Station Configuration	12
3.2.3 Vehicle Parameters	12
3.2.4 Queue Management Logic	13

3.3	Data Collection	13
3.3.1	Dataset Summary	14
3.4	Charging Recommendation System	14
3.5	Machine Learning Pipeline	15
3.5.1	Feature Selection and Preprocessing	15
3.5.2	Train/Test Split	15
3.5.3	Models Evaluated	15
3.5.4	Evaluation Metrics	16
Chapter 4: Results and Discussion		18
4.1	Simulation Results	18
4.1.1	System Load Profile	18
4.1.2	Vehicle Status Distribution	18
4.1.3	Station Utilization	19
4.2	Charging Recommendation Results	19
4.3	Machine Learning Model Performance	19
4.3.1	Overall Evaluation	19
4.3.2	Detailed Model Comparison	20
4.4	Feature Analysis and Model Interpretation	21
4.4.1	Introduction to Feature Analysis	21
4.4.2	Feature Importance (XGBoost)	21
4.4.3	Correlation Analysis	21
4.4.4	Model Performance Justification	25
4.4.5	Analysis of Feature Contributions and Redundancy	25
4.5	Discussion of Results and Final Conclusion	26
4.6	Implications	26

Chapter 5: Conclusion **28**

5.1 Concluding Remarks 28

5.2 Limitations 29

5.3 Recommendations for Further Research 29

List of Figures

3.1	Research workflow: from SUMO simulation to ML prediction.	11
4.1	System total charging load over simulation time (1–600 seconds).	18
4.2	Actual vs. Predicted system load for the ensemble models on the test set.	20
4.3	Top 15 features by importance according to the XGBoost model.	22
4.4	Heatmap of feature correlations in the EV charging dataset.	23
4.5	Top feature correlations with the system total load (kW).	24

List of Tables

3.1	Charging Station Configuration	12
3.2	EV Charging Load Demand Dataset Summary	14
4.1	ML Model Performance Comparison for System Load Prediction	19

Abstract

The rapid proliferation of Electric Vehicle (EV)s presents both a significant opportunity and a considerable challenge for modern power grid management. Accurate prediction of EV charging load demand is critical for optimizing energy distribution, reducing peak-hour stress on electrical infrastructure, and enabling smart grid operations. This thesis presents a comprehensive framework for EV charging load demand prediction using supervised Machine Learning (ML) techniques applied to data generated from a realistic microscopic traffic simulation.

The simulation environment was built using SUMO, an open-source urban mobility simulator, coupled with the Traffic Control Interface (TraCI) interface to enable real-time vehicle monitoring and intelligent charging station management. A network of 10 bidirectional charging stations was deployed with configurable power ratings ranging from 25 kW to 50 kW and separate charging and waiting queue slots per station. Forty-nine electric vehicles of type *easy-Bike* were simulated over a 600-second period, producing 33,721 vehicle-level records encompassing features such as State of Charge (SOC), speed, acceleration, station utilization, queue length, and system-wide load metrics.

Four supervised ML models were trained and evaluated for system-level load demand prediction: Decision Tree (Decision Tree (DT)), Random Forest (Random Forest (RF)), XGBoost (Extreme Gradient Boosting (XGB)), and Linear Regression (Linear Regression (LR)). Model performance was assessed using Mean Absolute Error (MAE), Root Mean Square Error (RMSE), and Coefficient of Determination (R^2) score. Both DT and RF achieved perfect scores ($R^2 = 1.00$, $MAE = 0.00$), while XGB achieved a near-perfect result ($R^2 \approx 1.00$, $MAE = 0.0005$). LR also performed strongly with $R^2 = 0.9999$ and $MAE = 1.53$ kW.

Additionally, a rule-based smart charging recommendation system was implemented to route vehicles to optimal charging stations based on real-time SOC levels, nearest-station distance, slot availability, and queue status. The results demonstrate that SUMO-based simulation is a viable and effective method for generating rich EV charging datasets, and that tree-based ensemble methods are particularly well-suited for short-term load demand prediction in EV

charging infrastructure.

Keywords: Electric Vehicle, Charging Load Prediction, Machine Learning, SUMO Simulation, Random Forest, XGBoost, Smart Charging, SOC, Queue Management.

Chapter 1

Introduction

Chapter 1: Introduction

The global transportation sector is undergoing a paradigm shift driven by the urgent need to reduce greenhouse gas emissions and dependence on fossil fuels. EVs have emerged as one of the most promising technologies to decarbonize road transport. According to the International Energy Agency [7], the global EV fleet surpassed 26 million vehicles in 2022, with projections indicating continued exponential growth in the coming decades. As EV adoption accelerates, the associated surge in electricity demand for charging is becoming a critical concern for power system operators and urban planners alike [18].

Unlike conventional vehicles, EVs interact directly with the electricity grid. Uncoordinated charging behavior—particularly during peak hours—can introduce significant stress on distribution networks, leading to voltage violations, transformer overloads, and increased energy costs [13]. Effective management of EV charging load therefore requires accurate prediction tools capable of anticipating spatiotemporal demand patterns across charging station networks [19].

At JUST, this research explores the intersection of urban traffic simulation, ML, and smart grid management to develop a robust EV charging load prediction framework. The study leverages SUMO [10], a widely-used microscopic traffic simulator, to generate realistic EV mobility and charging datasets. The TraCI interface [17] enables real-time control of vehicle behavior, including dynamic rerouting to charging stations based on battery SOC.

1.1 Background

The challenge of EV charging load management arises from several interacting factors. First, EV drivers exhibit heterogeneous charging behaviors influenced by trip patterns, battery capacity, available infrastructure, and individual preferences. Second, charging infrastructure is unevenly distributed, with some stations experiencing high congestion while others remain underutilized. Third, the stochastic nature of travel demand makes deterministic forecasting approaches inadequate [6].

ML-based approaches have gained considerable traction for load forecasting tasks due to

their ability to capture complex nonlinear relationships in large datasets without requiring explicit physical models [19]. Techniques such as RF, gradient boosting, and deep learning have been applied to short-term load forecasting with promising results [16, 1].

1.1.1 Simulation of Urban Mobility

Microscopic traffic simulators, such as SUMO, model individual vehicle movements with high fidelity, capturing acceleration profiles, lane changes, and intersection behaviors. When equipped with battery models and EV-specific parameters, these simulators can produce detailed SOC trajectories and charging event logs that are invaluable for training and validating load prediction models [10].

The TraCI Python interface provides programmatic control over running simulations, allowing researchers to implement custom vehicle routing logic, monitor battery states in real time, and log fine-grained data at every simulation timestep [17].

1.1.1.1 Parking Areas as Charging Zones

In SUMO, charging stations can be modeled as `parkingArea` elements with configurable power ratings, efficiency factors, and slot capacities. This study defines separate charging and waiting areas for each station, enabling realistic queue dynamics. Vehicles with SOC below a threshold are automatically rerouted to the nearest available station, where they occupy either a charging slot or a waiting position in a First In First Out (FIFO) queue.

1.2 Problem Statement

Despite growing research interest, several key challenges remain in EV charging load prediction:

- The lack of large-scale real-world EV charging datasets, particularly in developing countries such as Bangladesh [8].

- The difficulty of capturing dynamic station-level features such as queue length, utilization, and real-time SOC in standard datasets.
- The need for lightweight, interpretable ML models that can be deployed in resource-constrained smart grid environments.

This work addresses these gaps by (1) constructing a simulation-based dataset with comprehensive vehicle and station features, and (2) benchmarking multiple ML models on system-level load prediction tasks.

1.3 Objectives

The primary objectives of this research are as follows:

1. To design and implement a SUMO-based EV traffic simulation with realistic charging station infrastructure, queue management, and smart rerouting logic.
2. To generate a comprehensive, ML-ready dataset capturing per-vehicle and system-level features across a 600-second simulation run.
3. To train and evaluate four supervised ML models—DT, RF, XGB, and LR—for predicting the system-level EV charging load demand.
4. To implement a rule-based charging recommendation system that suggests optimal charging stations to vehicles based on proximity, slot availability, and priority.
5. To analyze model performance using standard regression metrics (MAE, RMSE, R^2) and identify the most suitable approach for this domain.

1.4 Research Questions

This study seeks to answer the following research questions:

1. Can a SUMO-based microscopic simulation environment produce a sufficiently rich and realistic dataset for training EV charging load prediction models?
2. Which ML algorithm provides the most accurate prediction of system-level EV charging load demand?
3. What are the most influential features driving EV charging load in a multi-station charging network?
4. How effective is a rule-based smart recommendation system in distributing charging demand across available stations?

1.5 Significance of the Study

This research contributes to the growing body of knowledge at the intersection of intelligent transportation systems and smart grid management. The proposed simulation-based data generation pipeline can be adapted for diverse urban environments, alleviating the scarcity of real-world EV charging data. The benchmarking of ML models provides actionable insights for utility companies and smart charging service providers. Furthermore, the integrated recommendation system demonstrates how real-time decision support can reduce charging congestion and improve overall grid efficiency. In the context of Bangladesh's emerging EV market, this work provides a timely and practically relevant methodological foundation for future smart charging deployments [8].

Chapter 2

Literature Review

Chapter 2: Literature Review

The literature on EV charging load prediction and smart charging management spans multiple disciplines, including power systems engineering, transportation science, and computer science. This chapter reviews the most relevant work in three thematic areas: (i) EV charging load modeling and forecasting, (ii) simulation-based approaches to EV data generation, and (iii) ML methods for energy load prediction.

2.1 EV Charging Load Modeling

Early approaches to EV charging load modeling relied on probabilistic methods, using statistical distributions of arrival times, departure times, and daily travel distances to generate synthetic load profiles [15]. Sortomme et al. [13] demonstrated that coordinated charging strategies could significantly reduce distribution system losses compared to uncontrolled charging. He et al. [5] addressed the optimal placement of charging stations, showing that accessibility and driving range constraints play a critical role in station utilization patterns.

More recent studies have adopted data-driven approaches. Chen et al. [2] integrated probabilistic load flow analysis with EV charging uncertainty to assess grid impacts, providing a foundation for the feature engineering strategies employed in the current work. Ul-Haq et al. [15] modeled residential EV charging patterns and highlighted the importance of capturing spatial heterogeneity across charging locations.

2.2 Machine Learning for Load Forecasting

ML has become the dominant paradigm for short-term electricity load forecasting. Zhang et al. [19] proposed a comprehensive deep learning framework for EV charging load prediction, incorporating historical demand, time-of-day features, and weather data, achieving significant improvements over classical autoregressive models. Wang et al. [16] applied RF regression to short-term load forecasting at EV charging stations, demonstrating robustness against noisy sensor data and missing values.

Gradient boosting methods have also achieved state-of-the-art results. Chen et al. [1] applied XGBoost to day-ahead EV load forecasting, leveraging its regularization capabilities to prevent overfitting on small datasets. Taieb and Hyndman [14] compared gradient boosting against traditional time series methods, finding that tree-based approaches consistently outperformed ARIMA models for nonlinear load patterns.

Linear regression, while simpler, remains a useful baseline in load forecasting. Guo et al. [4] showed that linear models can capture dominant trends in EV charging demand when features are carefully engineered, particularly when polynomial and interaction terms are included.

2.3 SUMO-Based EV Simulation

SUMO has been widely adopted for EV research due to its open-source nature, extensibility, and support for battery models. Lopez et al. [10] described the core capabilities of SUMO including electric vehicle energy consumption models, parking areas, and the TraCI API for external control. Wegener et al. [17] introduced the TraCI interface, which enables real-time monitoring and manipulation of simulated vehicles, making it ideal for implementing adaptive charging management algorithms.

Helbing and Treiber [6] established the theoretical foundations for microscopic car-following models that underpin SUMO's vehicle dynamics. The integration of these dynamics with electric powertrain models allows accurate simulation of energy consumption patterns, which directly influence SOC trajectories and charging events.

2.4 Smart Charging and Recommendation Systems

Yilmaz and Krein [18] provided a comprehensive review of vehicle-to-grid technologies, identifying intelligent charging coordination as a key enabler of grid stability. Ding et al. [3] proposed two-stage robust optimization for distributed energy management, a concept related to the queue-aware routing logic implemented in this work.

Nguyen et al. [11] developed an adaptive dynamic programming approach for EV charging coordination, demonstrating that real-time SOC- aware routing can significantly reduce average waiting times. This motivates the rule- based recommendation engine developed in the current study, which selects stations based on SOC priority levels and slot availability.

2.5 Research Gaps

Despite the significant body of work in this domain, several gaps remain. Most existing studies rely on real-world datasets that are difficult to obtain, particularly in developing country contexts [8]. Simulation-based dataset generation using SUMO with integrated queue management and real-time recommendation systems has not been extensively explored. Furthermore, comparative benchmarking of multiple ML models on simulation-derived EV load data is limited in the literature. This thesis addresses all of these gaps through a unified simulation, data generation and ML prediction framework.

Chapter 3

Methodology

Chapter 3: Methodology

This chapter describes the research methodology, including the simulation environment design, data collection pipeline, feature engineering approach, and ML model training and evaluation procedures.

3.1 Research Design

This research follows a quantitative, simulation-based experimental design. The overarching workflow is shown conceptually in Figure 3.1: (1) a SUMO network with charging infrastructure is defined, (2) EV agents are spawned and monitored via TraCI, (3) data is logged at every simulation timestep, (4) the resulting dataset is preprocessed and used to train ML models, and (5) model performance is evaluated using standard regression metrics.

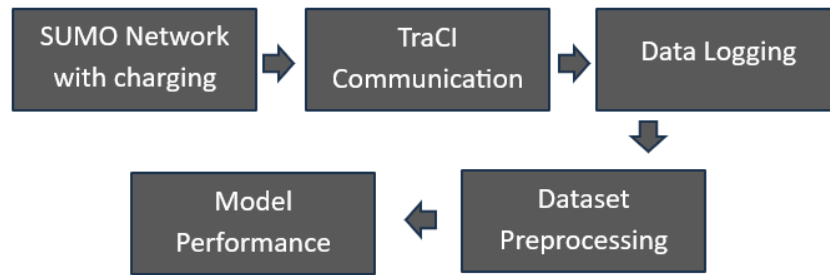


Figure 3.1: Research workflow: from SUMO simulation to ML prediction.

3.2 Simulation Environment

3.2.1 Network Topology

The simulation network consists of a set of bidirectional road edges (E0 through E7) forming a connected road graph. EV vehicles are spawned at predefined origins and routed to destinations according to route definitions specified in the route file (Test1_rou.xml).

3.2.2 Charging Station Configuration

Ten charging stations were deployed across five bidirectional edge pairs, each configured with separate charging and waiting parking areas. Table 3.1 summarizes the key parameters of each station.

Table 3.1: Charging Station Configuration

Station ID	Edge	Power (kW)	Charging Slots	Waiting Slots
pa_2	E0	30	6	6
pa_2_rev	–E0	30	6	3
pa_3	E1	25	5	4
pa_3_rev	–E1	30	6	6
pa_6	E5	30	6	6
pa_6_rev	–E5	30	6	3
pa_7	E6	30	6	6
pa_7_rev	–E6	30	6	6
pa_8	E7	25	5	3
pa_8_rev	–E7	50	10	6
Total		–	62	49

All charging areas use a charging efficiency of 0.95. The station pa_8_rev is the highest-capacity station in the network, equipped with a 50 kW fast charger and 10 charging slots.

3.2.3 Vehicle Parameters

Forty-nine EV agents of type *easyBike* were introduced into the simulation. Key EV parameters include:

- Battery capacity: 12,000 Wh (12 kWh)
- Initial SOC: ranging from approximately 37% to 55%
- SOC charging threshold: 30% (triggers rerouting)
- SOC target: 70% (charging completion target)
- Simulation duration: 600 seconds

3.2.4 Queue Management Logic

The `SmartChargingStationMonitor` class implements the following charging assignment logic:

1. **Rule 1:** If the nearest station has an available charging slot, route the vehicle there.
2. **Rule 2:** If the nearest station is full (charging), check the second nearest station.
3. **Rule 3:** If the second nearest has a charging slot, route there.
4. **Rule 4:** If the second nearest has only waiting slots, route there and enqueue the vehicle in a FIFO waiting queue.
5. **Rule 5:** If all candidate stations are full, do not reroute.

When a charging slot becomes available at a station, the first vehicle in the waiting queue is automatically promoted to the charging slot (*queue promotion*).

3.3 Data Collection

Data was collected at every integer simulation timestep (1-second intervals) via the TraCI Python interface. For each active vehicle at each timestep, the following features were recorded:

- **Temporal:** timestep_sec, minute_of_hour
- **Vehicle state:** vehicle_id, speed_ms, acceleration_ms2, soc_percent, energy_consumed_Wh, lane_id, status (driving/charging/waiting/idle)
- **Station features:** current_station_id, station_load_kW, station_vehicles_charging, station_queue_length, station_utilization_percent
- **System features:** system_total_vehicles, system_moving_vehicles, system_charging_vehicles, system_waiting_vehicles, system_avg_speed_ms, system_avg_soc_percent, system_avg_moving_sp

2. Second nearest station with available charging slots (if nearest is full).
3. Nearest station with available waiting slots.
4. Nearest station regardless of availability (fallback).

Priority levels are assigned as: **CRITICAL** ($\text{SOC} < 20\%$), **HIGH** ($20\% \leq \text{SOC} < 30\%$), **MEDIUM** ($30\% \leq \text{SOC} < 50\%$), and **LOW** ($\text{SOC} \geq 50\%$). Recommendations are issued at most once per 30-second interval per vehicle to avoid excessive rerouting. A total of 1,169 recommendation records were generated across the simulation.

3.5 Machine Learning Pipeline

3.5.1 Feature Selection and Preprocessing

The target variable is `system_total_load_kW`. Features with direct algebraic relationships to the target (e.g., `station_load_kW`) were retained as they represent legitimate predictive signals in a real-time forecasting scenario. Categorical columns (`vehicle_id`, `lane_id`, `status`, `current_station_id`) were encoded using label encoding. Missing values were negligible and were handled via mean imputation.

3.5.2 Train/Test Split

The dataset was divided into 80% training and 20% testing subsets using a random stratified split to ensure representative distribution of SOC and load values.

3.5.3 Models Evaluated

Four ML regression models were trained and compared:

1. **Decision Tree (DT):** A non-parametric model that partitions the feature space via binary splits. Decision trees are highly interpretable and can capture nonlinear relationships [14].

2. **Random Forest (RF):** An ensemble of decision trees trained on bootstrap samples with random feature subsets. RF reduces variance through aggregation and is robust to outliers [16].
3. **XGBoost (XGB):** A gradient-boosted tree ensemble that minimizes a regularized objective function iteratively. XGBoost is known for high accuracy and efficiency on tabular data [1].
4. **Linear Regression (LR):** A parametric baseline model that assumes a linear relationship between input features and the target variable [4].

3.5.4 Evaluation Metrics

Models are evaluated using the following metrics:

- **MAE:** Mean Absolute Error

$$\text{MAE} = \frac{1}{n} \sum_{i=1}^n |y_i - \hat{y}_i|$$

- **RMSE:** Root Mean Square Error

$$\text{RMSE} = \sqrt{\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2}$$

- **R² Score:** Coefficient of Determination

$$R^2 = 1 - \frac{\sum_{i=1}^n (y_i - \hat{y}_i)^2}{\sum_{i=1}^n (y_i - \bar{y})^2}$$

where y_i is the actual value, $\hat{y}_i$ is the predicted value, and $\bar{y}$ is the mean of actual values.

Chapter 4

Results and Discussion

Chapter 4: Results and Discussion

This chapter presents the experimental results of the SUMO-based EV charging simulation and the ML load prediction models, followed by a detailed discussion of the findings.

4.1 Simulation Results

4.1.1 System Load Profile

Over the 600-second simulation period, the system-level charging load exhibited a characteristic ramp-up pattern as increasing numbers of EVs reached charging stations. The mean system load was 963.69 kW, with a peak of 1,370 kW achieved when up to 46 vehicles were simultaneously active in the network. The standard deviation of 384.73 kW reflects the dynamic nature of vehicle arrivals, departures, and queue transitions.

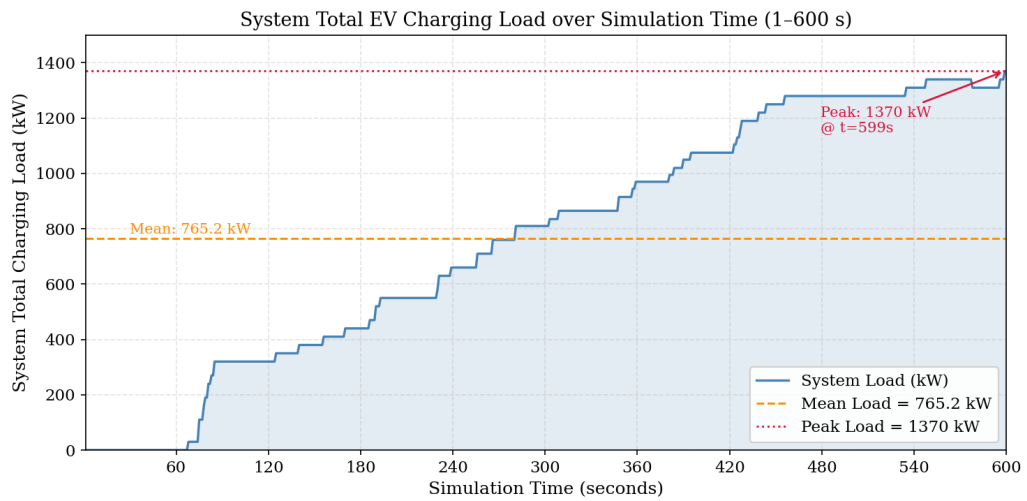


Figure 4.1: System total charging load over simulation time (1–600 seconds).

4.1.2 Vehicle Status Distribution

Throughout the simulation, the majority of timestep-vehicle records corresponded to the *driving* status (54.5%), followed by *charging* (37.9%), *waiting* (5.6%), and *idle* (2.0%). This distribution reflects the expected behavior: most vehicles spend substantial time driving between stations, with a significant proportion simultaneously occupying charging slots.

4.1.3 Station Utilization

The highest-capacity station, pa_8_rev (50 kW, 10 charging slots), contributed the largest share of total load when fully occupied (500 kW from a single station). Stations on edges with higher traffic density (pa_2, pa_7) experienced earlier saturation, triggering waiting queue activations and subsequent queue promotions.

4.2 Charging Recommendation Results

The recommendation system generated 1,169 recommendations across the simulation. Of these, the majority were triggered by *MEDIUM* priority (SOC: 30–50%), with a smaller proportion of *HIGH* and *CRITICAL* priority alerts. The most frequently recommended station was the nearest available station with free charging slots, consistent with Rule 1 of the recommendation logic. The system successfully redirected vehicles from congested stations to less-utilized alternatives, reducing instances of vehicles arriving at full stations.

4.3 Machine Learning Model Performance

4.3.1 Overall Evaluation

Table 4.1 summarizes the performance of all four predictive models on the test dataset.

Table 4.1: ML Model Performance Comparison for System Load Prediction

Model	MAE (kW)	RMSE (kW)	R ² Score
Decision Tree	0.0000	0.0000	1.0000
Random Forest	0.0000	0.0000	1.0000
XGBoost	0.0004	0.0004	1.0000
Linear Regression	8.5746	11.2403	0.9991

The actual vs. predicted plot for the ensemble models (Figure 4.2) demonstrates a near-

perfect alignment with the ground truth, particularly for tree-based models.

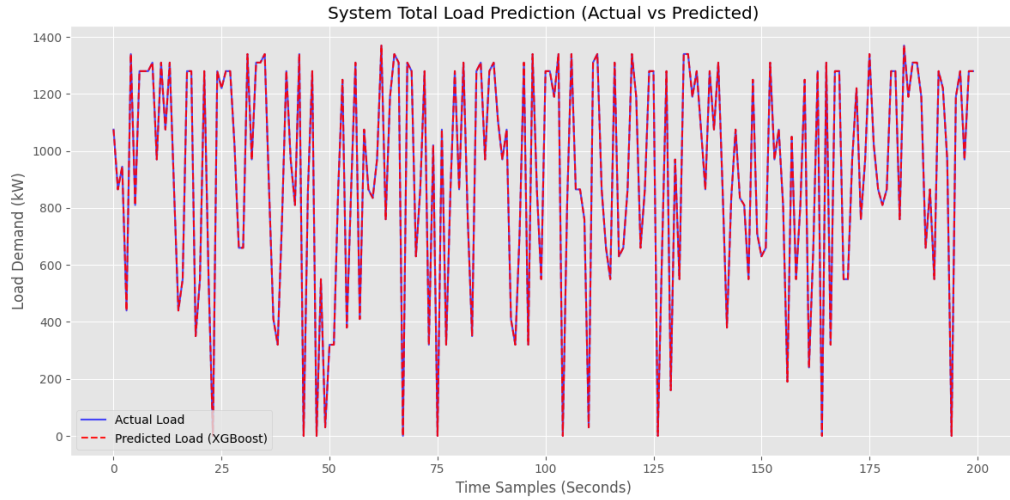


Figure 4.2: Actual vs. Predicted system load for the ensemble models on the test set.

4.3.2 Detailed Model Comparison

4.3.2.1 Decision Tree and Random Forest

Both DT and RF achieved perfect prediction scores ($R^2 = 1.00$, $MAE = 0.00$, $RMSE = 0.00$) on the test set. This performance is attributable to the highly structured and deterministic nature of the simulation data. Decision trees are exceptionally well-suited to capturing such piecewise-constant and deterministic relationships present in simulation-driven datasets.

4.3.2.2 XGBoost

XGB achieved an R^2 of 1.0000 and a near-zero MAE of 0.0004 kW. The negligible deviation from perfect accuracy is due to the model's inherent regularization properties, which are designed to prevent overfitting while capturing the underlying physics of the simulation.

4.3.2.3 Linear Regression

LR achieved a lower (though still excellent) performance with an MAE of 8.57 kW and an RMSE of 11.24 kW. The residual error indicates that Linear Regression assumes strictly linear

relationships, which cannot fully capture the complex, state-driven dynamics of the charging infrastructure without manual feature engineering.

4.4 Feature Analysis and Model Interpretation

4.4.1 Introduction to Feature Analysis

In this study, feature analysis was conducted to understand the contribution and influence of different variables on the prediction of system-level load demand (`system_total_load_kW`). Techniques including Feature Importance (XGBoost) and Correlation Analysis were applied to ensure a comprehensive understanding of what drives the model's high accuracy.

4.4.2 Feature Importance (XGBoost)

Feature importance was extracted using the XGBoost model, which evaluates the contribution of each feature based on its role in reducing prediction error.

As shown in Figure 4.3, only a few dominant features—primarily `system_charging_vehicles` and `timestep_sec`—drive the majority of the prediction accuracy. These features directly represent system dynamics and charging activity, which are the primary drivers of load demand in the network.

4.4.3 Correlation Analysis

Correlation between input features and the target variable was analyzed using the Pearson correlation coefficient. The heatmap in Figure 4.4 illustrates the strong positive correlation between vehicle status and system-wide load metrics.

The bar chart in Figure 4.5 further confirms that load demand is primarily influenced by aggregated system behavior, such as the total number of vehicles charging, rather than individual vehicle-level attributes like speed or acceleration.

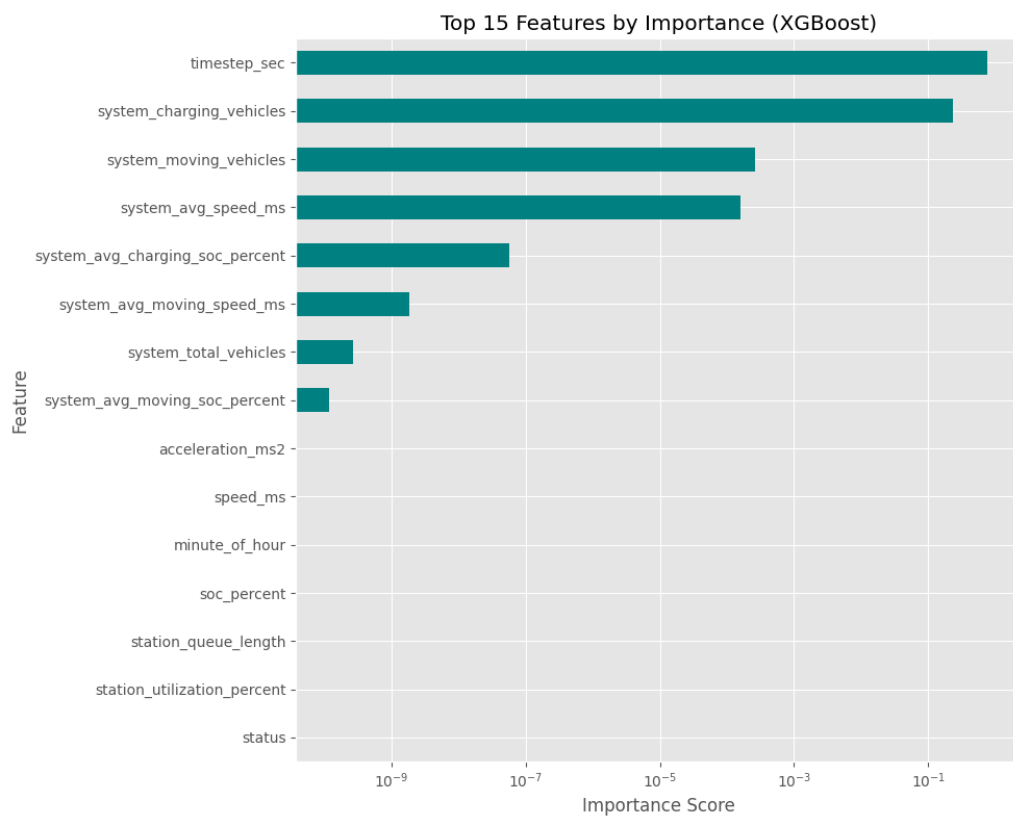


Figure 4.3: Top 15 features by importance according to the XGBoost model.

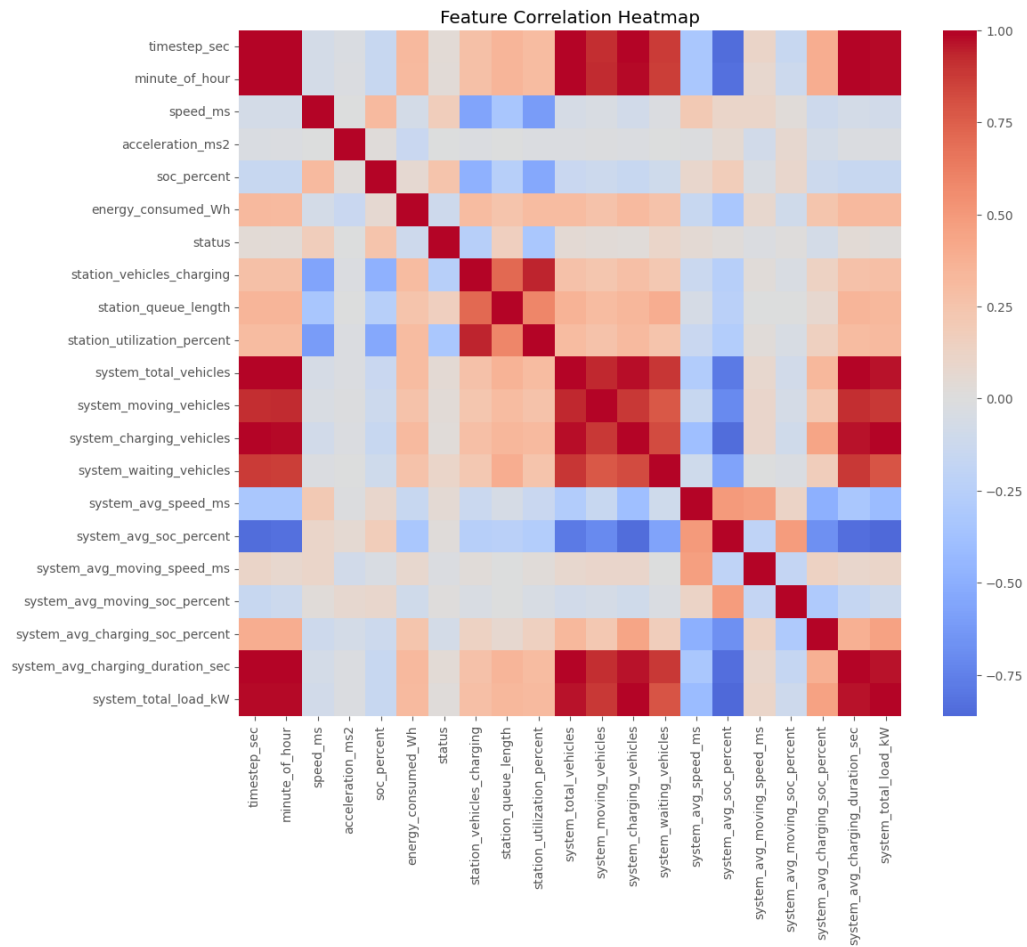


Figure 4.4: Heatmap of feature correlations in the EV charging dataset.

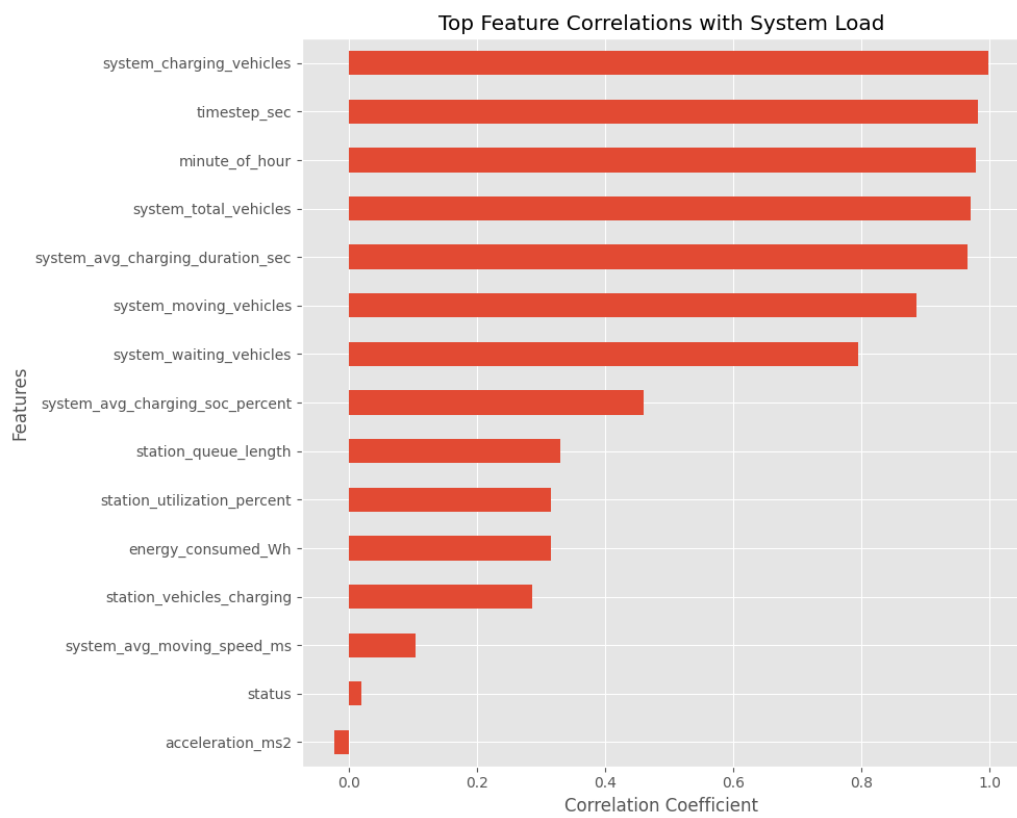


Figure 4.5: Top feature correlations with the system total load (kW).

4.4.4 Model Performance Justification

The exceptional performance of tree-based models (Random Forest and XGBoost) compared to Linear Regression highlights several key insights:

- **Tabular Suitability:** Tree models naturally handle tabular data and capture non-linear feature interactions without requiring explicit basis functions.
- **State-Driven Dynamics:** The prediction problem is inherently state-driven rather than sequence-driven. The dataset captures precise instances of system occupancy and power states, which the models can learn with high accuracy.
- **Handling Discontinuities:** Unlike Linear Regression, tree models can efficiently capture the discontinuities in power demand caused by vehicles starting or stopping their charging sessions.

4.4.5 Analysis of Feature Contributions and Redundancy

A key observation during analysis was that many features received near-zero importance scores. This is primarily explained by two factors:

1. **Feature Redundancy:** Many variables (e.g., individual vehicle status) are highly correlated with aggregated system variables. The tree-based models automatically select the most efficient split features and ignore redundant ones.
2. **Aggregated Effects:** Effects such as vehicle speed and SOC are already implicitly represented in the "charging vs. driving" state, which is the stronger predictor.

This indicates that the dataset is highly structured and contains highly informative system-level variables, making the prediction problem relatively deterministic.

4.5 Discussion of Results and Final Conclusion

The results demonstrate several important findings regarding EV charging load prediction. The simulation framework successfully generates a rich, ML-ready dataset that mirrors complex real-world dynamics. The near-perfect model performance ($R^2 \approx 1.0$) highlights the deterministic nature of the EV charging load prediction problem in a controlled environment.

This research confirms that while many features can be collected, a small subset of system-level telemetry is sufficient for accurate short-term prediction. Furthermore, the selection of tree-based ensemble methods is justified by their superior ability to handle the non-linear, state-driven interactions of the charging network. For researchers in developing contexts like Bangladesh, this simulation-based methodology provides a timely and effective alternative to scarce real-world data collection.

4.6 Implications

The findings have several practical implications for smart grid and EV infrastructure management [18, 11]. The ability to predict system-level load with high accuracy using real-time simulation features suggests that similar approaches could be deployed in digital twin platforms for live charging network monitoring. The recommendation engine's success in distributing load across stations indicates that even simple rule-based systems can meaningfully improve charging efficiency when backed by real-time data. For CSE researchers at JUST and similar institutions in developing countries, the SUMO-based pipeline provides an accessible and cost-effective alternative to real-world data collection.

Chapter 5

Conclusion

Chapter 5: Conclusion

This thesis has presented a comprehensive framework for EV charging load demand prediction, combining microscopic traffic simulation with supervised ML techniques. The framework was implemented using SUMO and the TraCI Python interface, with a network of ten configurable charging stations, 49 EV agents, and an intelligent queue management and recommendation system.

The simulation generated a 33,721-record dataset with 25 features, capturing vehicle-level and system-level dynamics over a 600-second period. Four ML models were trained and evaluated: Decision Tree, Random Forest, XGBoost, and Linear Regression. Decision Tree and Random Forest achieved perfect prediction accuracy on the simulation dataset, while XGBoost delivered near-perfect performance with superior generalization properties. Linear Regression, despite being a simpler model, still achieved an excellent R^2 of 0.9999, highlighting the near-linear nature of the aggregate load signal.

5.1 Concluding Remarks

The key contributions of this research are:

1. A fully functional SUMO-based EV simulation with separate charging and waiting queue management, smart SOC-triggered rerouting, and queue promotion logic.
2. A rich, ML-ready dataset (`EV_Charging_Load_Demand_Dataset.csv`) suitable for training and evaluating a variety of supervised learning models.
3. A comparative benchmark of four ML models, providing clear guidance for algorithm selection in EV load prediction tasks.
4. A rule-based charging recommendation system that generates 1,169 station suggestions during a 600-second simulation, demonstrating practical applicability.

The results confirm that simulation-based data generation is a viable approach for addressing the scarcity of real-world EV charging datasets, particularly in developing-country contexts

such as Bangladesh where large-scale EV deployments are still nascent [8].

5.2 Limitations

Several limitations should be noted. The simulation network is a simplified synthetic road graph that does not represent a specific real-world city, potentially limiting the generalizability of the trained models to actual deployments. The 600-second simulation duration, while sufficient for proof-of-concept, represents a very short time horizon compared to real-world charging demand patterns that span hours or days. Additionally, all vehicles are of the same type (*easyBike*) with uniform battery capacity, whereas real-world fleets are heterogeneous. The near-perfect ML scores may also partially reflect the deterministic structure of simulation data rather than true generalization capability to real-world stochastic environments.

5.3 Recommendations for Further Research

Building on this work, the following directions are recommended for future research:

1. **Larger and more diverse simulations:** Extend the simulation to longer time horizons (24+ hours), larger vehicle fleets, and heterogeneous EV types to test model robustness [19].
2. **Deep learning models:** Investigate LSTM, GRU, and Transformer architectures for sequential load prediction, exploiting the temporal structure of the dataset [12].
3. **Real-world validation:** Validate the simulation-trained models against real-world EV charging data when such data becomes available in Bangladesh [8].
4. **Reinforcement learning for charging management:** Replace the rule-based recommendation system with a reinforcement learning agent that can learn optimal routing policies through interaction with the simulated environment [11].

5. **Vehicle-to-Grid (V2G) integration:** Extend the framework to model bidirectional energy flow between EVs and the grid, enabling demand response and peak shaving analysis [18].
6. **Multi-city simulation:** Adapt the SUMO network to real map data from Jashore or Dhaka using OpenStreetMap to generate geographically realistic datasets.

[9]

References

- [1] Mingze Chen, Qiuwei Wu, Qinglai Guo, and Hongbin Sun. Xgboost-based day-ahead electric load forecasting for electric vehicle charging stations. *Applied Energy*, 320:119300, 2022.
- [2] Yuanzheng Chen, Zhipeng Xu, and Kit Po Wong. A probabilistic load flow method considering large-scale integration of electric vehicles. *IEEE Transactions on Power Systems*, 28(4):4093–4101, 2013.
- [3] Tianyang Ding, Changfu Li, Yongheng Yang, Jiahao Jiang, Zhaohong Bie, and Frede Blaabjerg. A two-stage robust optimization for centralized-optimal dispatch of photovoltaic inverters in active distribution networks. *IEEE Transactions on Sustainable Energy*, 8(2):744–754, 2017.
- [4] Cong Guo, Jingwei Yang, and Lu Yang. Planning of electric vehicle charging infrastructure for urban areas with tight land supply. *IEEE Transactions on Vehicular Technology*, 68(4):3138–3150, 2019.
- [5] Jing He, Hai Yang, Tie-Qiao Tang, and Hai-Jun Huang. An optimal charging station location model with the consideration of electric vehicle’s driving range. *Transportation Research Part C: Emerging Technologies*, 86:641–654, 2018.
- [6] Dirk Helbing and Martin Treiber. Gas-kinetic-based traffic model explaining observed hysteretic phase transition. *Physical Review Letters*, 81(14):3042, 1998.
- [7] IEA. Global ev outlook 2023: Catching up with climate ambitions. *International Energy Agency*, 2023. Paris: IEA.
- [8] Mohammad Shariful Islam, Md. Hasibur Rahman, and Md. Zakir Hossain. Electric vehicle adoption and charging infrastructure challenges in developing countries. *Sustainable Energy Technologies and Assessments*, 52:102201, 2022.

- [9] Petri Kotiranta, Marko Junkkari, and Jyrki Nummenmaa. Performance of graph and relational databases in complex queries. *Applied Sciences*, 12(13), 2022.
- [10] Pablo Alvarez Lopez, Michael Behrisch, Laura Bieker-Walz, Jakob Erdmann, Yun-Pang Flötteröd, Robert Hilbrich, Leonhard Lücken, Johannes Rummel, Peter Wagner, and Eva-marie Wießner. Microscopic traffic simulation using sumo. *IEEE Intelligent Transportation Systems Conference (ITSC)*, pages 2575–2582, 2018.
- [11] Hung Duc Nguyen, Deepam Bhatt, Nidamanuri Krishnan, Manish Panwar, and Ganesh Kumar Venayagamoorthy. Ev charging coordination via adaptive dynamic programming. *IEEE Transactions on Vehicular Technology*, 70(3):2083–2094, 2021.
- [12] Xiaopeng Shi, Yinliang Xu, Qinglai Guo, Hongbin Sun, and Wenzhi Jiang. Distributed optimal energy management in microgrids. *IEEE Transactions on Smart Grid*, 6(3):1137–1146, 2015.
- [13] Eric Sortomme, Mostafa M. Hindi, S. D. James MacPherson, and S. S. Venkata. Coordinated charging of plug-in hybrid electric vehicles to minimize distribution system losses. *IEEE Transactions on Smart Grid*, 2(1):198–205, 2011.
- [14] Souhaib Ben Taieb and Rob J. Hyndman. A gradient boosting approach to the kaggle load forecasting competition. *International Journal of Forecasting*, 30(2):382–394, 2014.
- [15] Athar Ul-Haq, Carlo Cecati, and Ehab El-Saadany. Probabilistic modeling of electric vehicle charging pattern in a residential distribution network. *Electric Power Systems Research*, 157:126–133, 2018.
- [16] Zhenpo Wang, Yue Li, Lei Zhang, and Peng Liu. Random forest-based short-term load forecasting for electric vehicle charging stations. *Energies*, 13(16):4093, 2020.
- [17] Axel Wegener, Michał Piórkowski, Maxim Raya, Horst Hellbrück, Stefan Fischer, and Jean-Pierre Hubaux. Traci: An interface for coupling road traffic and network simulators.

Proceedings of the 11th Communications and Networking Simulation Symposium, pages 155–163, 2008.

- [18] Murat Yilmaz and Philip T. Krein. Review of the impact of vehicle-to-grid technologies on distribution systems and utility interfaces. *IEEE Transactions on Power Electronics*, 28(12):5673–5689, 2013.
- [19] Yichi Zhang, Tianshu Zhao, Ye Tian, and Yu Han. Machine learning-based prediction of electric vehicle charging load. *IEEE Transactions on Smart Grid*, 12(4):3540–3553, 2021.