21700 NMC (~5 Ah) — Cycle Degradation Summary

Generated: 2026-03-04 13:44

- Two-condition comparison: baseline (25C, 1C) vs stress (35C, 2C).
- Synthetic but plausible signals: V(t), SOC, temperature, per-cycle KPIs.
- KPIs: discharge capacity, coulombic efficiency, energy efficiency, resistance growth (model).

Baseline (25C, 1C)

Cycles: 120
Capacity retention: 96.1%
Final coulombic efficiency: 99.64%
Final energy efficiency: 113.36%
Peak temperature: 26.1 C

Stress (35C, 2C)

Cycles: 120
Capacity retention: 91.7%
Final coulombic efficiency: 99.55%
Final energy efficiency: 130.02%
Peak temperature: 39.9 C

Comparison Charts

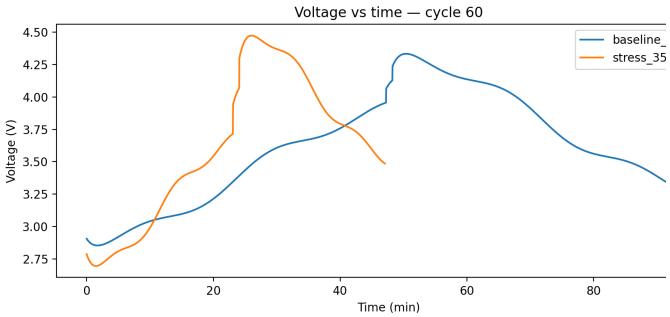

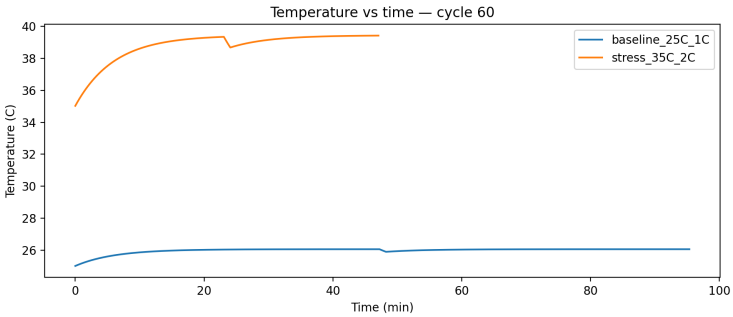

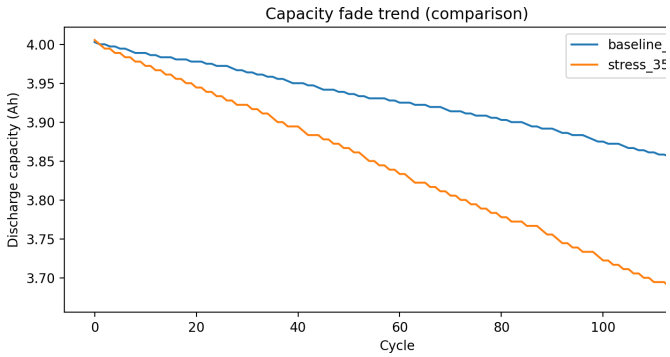

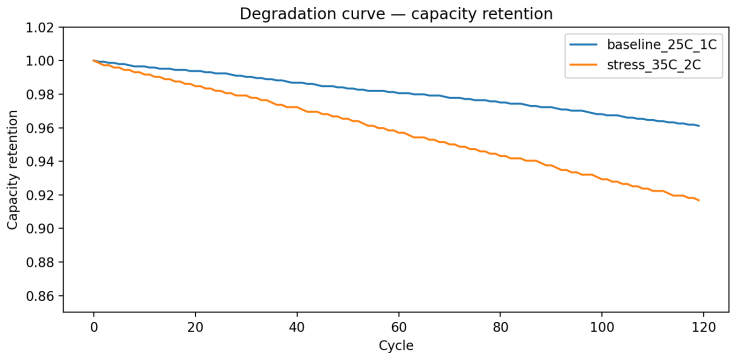
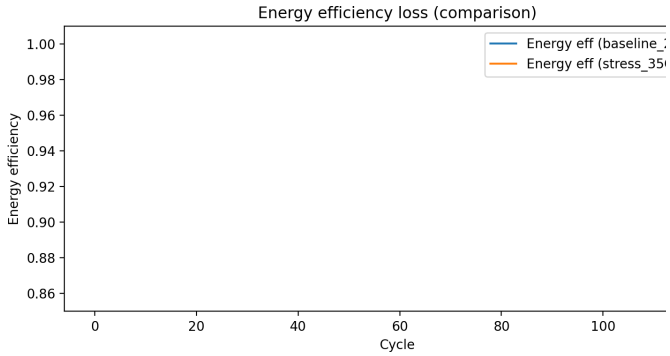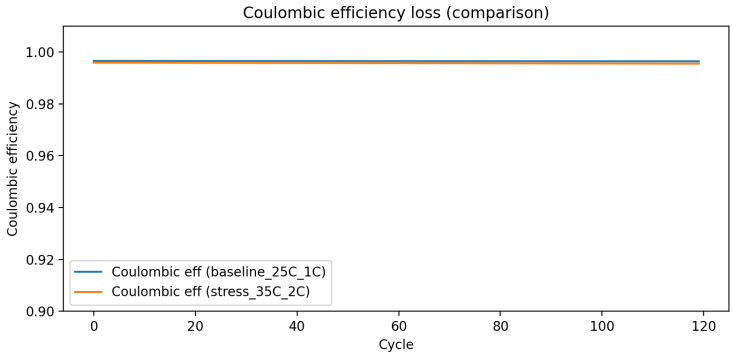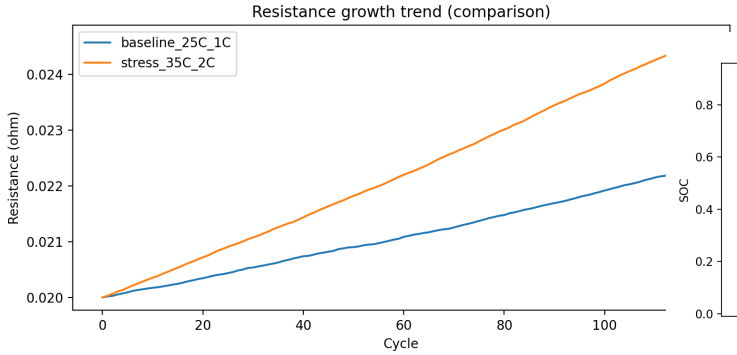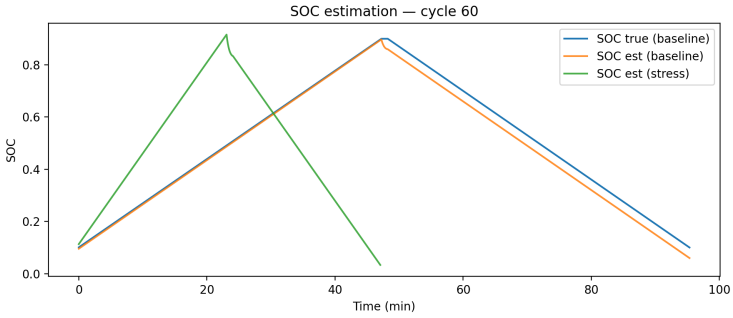
Efficiency + Resistance