

Foam Scrapers

Foam is versatile, flexible, and often suited to pipeline systems where pigging has not taken place before. Foam scrapers can perform excellent on bore restrictions and significant changes in pipe internal diameter.

Designed to remove debris and deposits from the pipeline. IK Saudi's foam scrapers are made of lightweight open-cell polyurethane foam and equipped with pulling ropes for easy retrieval from the receiving trap.





Low density: 24 - 32 kg/m³

Medium density: 80 – 112 kg/m³

High density: 128 - 160 kg/m³



The basic design consists of a flexible, bullet shaped polyurethane foam cylinder. The rear end of the IK Saudi's foam scraper is concave to allow more pressure to be exerted and create tighter seal against the pipe wall. This helps to prevent "by-pass" of the propelling agent (water, air, or product) and virtually eliminates product contamination. Overall length of IK Saudi's foam scraper (Low, Medium, and High densities) is approximately 1.5-2 times the diameter of the pipeline and oversize of the bare scrapers varies between ¼" and ¾" depending on size of pig and pipe grade.

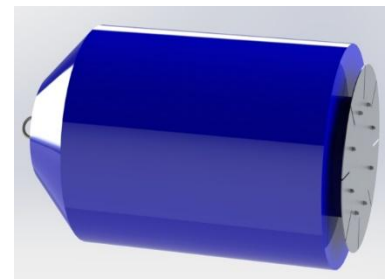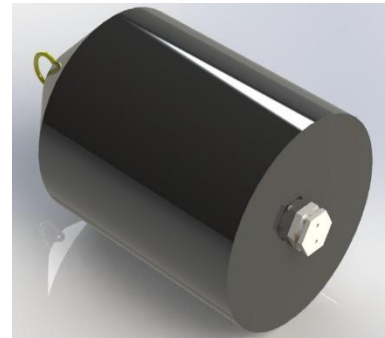

IK Saudi's foam scraper sizes ranges from ½" to 64", can be coated with polyurethane for more durability and can incorporate with anything from silicon carbide grit, nylon brush, steel wire brushes to metal studs for heavy-duty cleaning. Further, can be adapted to include gauge plates, transmitter housing, magnets or manufactured to be extra-long (for extended sealing application), extra-short (for ball valve launching & receiving) and bi-directional.

For toughest cleaning and scraping operations

Mill scale, pipeline corrosion, even rock-hard mineral deposits are no match for rugged IK Saudi polyurethane foam pig cleaners equipped with silicon carbide straps or flame-hardened wire brushes. Made from tough polyurethane foam, Medium density (80-112kg/m³) feature a hard polyurethane crisscross pattern with spirally applied silicon carbide straps. Use this type for removing hard deposits in all pipe sizes over medium length runs. High density (128-160kg/m³) crisscross silicon carbide and wire brush IK Saudi polyurethane foam pigs are recommended for longer runs, multiple turns and tough cleaning action.



MD Silicon Carbide



HD Silicon Carbide



MD Wire Brush



HD Wire Brush

For efficient pipeline wiping

Medium density or High-density crisscross IK Saudi polyurethane foam pigs feature hard polyurethane bands spirally applied on tough polyurethane foam cores. Density ranges are 80-112kg/m³ (Blue) and 128-160kg/m³ (Dark Red). Both types easily turn 90° bends, cross tees and slip through valves. Medium or High-density crisscross is ideal for new construction and on-stream cleaning. High density crisscross models are recommended for extra cleaning or wiping on long pipeline runs.



MD Criss-cross



HD Criss-cross

For pipeline drying

When pipeline maintenance calls for mild scraping, final drying, or water removal after hydrostatic testing, select a Low, Medium, or High-density bare polyurethane foam pig. IK Saudi bare polyurethane foam pigs are made of durable, resilience flexible polyurethane foam ranging in density from 24 to 160 kg/m³. IK Saudi polyurethane foam pigs resist mild acids, caustic solutions, and hydrocarbons. Low density polyurethane foam pigs are cylindrical with a chamfered nose and rear polyurethane seal. Medium and High-density models are cylindrical with a bullet nose and dished end.



LD Bare



MD Bare



HD Bare

LOW DENSITY

24 – 32 kg/m³

(Can be hand launched)

PIG



LD-B
Bare

LD-CC
Crisscross

Drying
Flow Test
Line Test

Light Cleaning

MEDIUM DENSITY

80 – 112 kg/m³



MD-B
Bare

MD-CC
Crisscross

MD-FC
Fully Coated

MD-WB
Wire Brush

MD-SC
Silicon Carbide

Drying

Cleaning

Cleaning

Scraping

Scraping

HIGH DENSITY

128 – 160 kg/m³



HD-B
Bare

HD-CC
Crisscross

HD-FC
Fully Coated

HD-WB
Wire Brush

HD-HWB
Heavy Duty Wire Brush

HD-TWB (Maxi Brush)
Total Coverage Wire Brush

MD-SC
Silicon Carbide

MD-TSC
Total coverage Silicon Carbide

Drying

Cleaning

Cleaning

Scraping

Heavy Scraping

Maximum Scraping

Scraping

Maximum Scraping

ADDITIONS



Handling Rope
(Front, rear or both ends)



Double Dish



Double Nose



Cavity – for mounting transmitters
(Diameter and length to be specified with order)

Other additions also available:

- Non-Ferrous Brush - Nylon Brush or Velcro for use on internally coated pipelines
- Stainless Steel Wire Brush
- Single Spiral Coated
- Gauging Facility - with or without aluminum gauge plate
- High strength Magnets for tracking facilities
- By-Pass Facility – Pluggable
- Polyurethane Scraper Blades
- Extra Long - for extended sealing applications
- Extra Short - for Ball valve or launching & receiving facilities

Specifications

IK Saudi polyurethane foam pigs are industrial pipeline and municipal water main cleaners and product recover devices. The basic design consists of a flexible, bullet shaped polyurethane foam cylinder. The rear end of IK Saudi polyurethane foam pig is concave to allow more pressure to be exerted and create tighter seal against the pipe wall. This helps to prevent “by-pass” of the propelling agent (water, air, or product) and virtually eliminates product contamination. Overall length of IK Saudi polyurethane foam pigs (Medium and High densities) are approximately 2 times the diameter of the pipeline and oversize of the bare pigs varies between 0.25” and 0.75” depending on size of pig and pipe grade.