


Carlos Humberto Ramirez Rodriguez

Prueba inicial

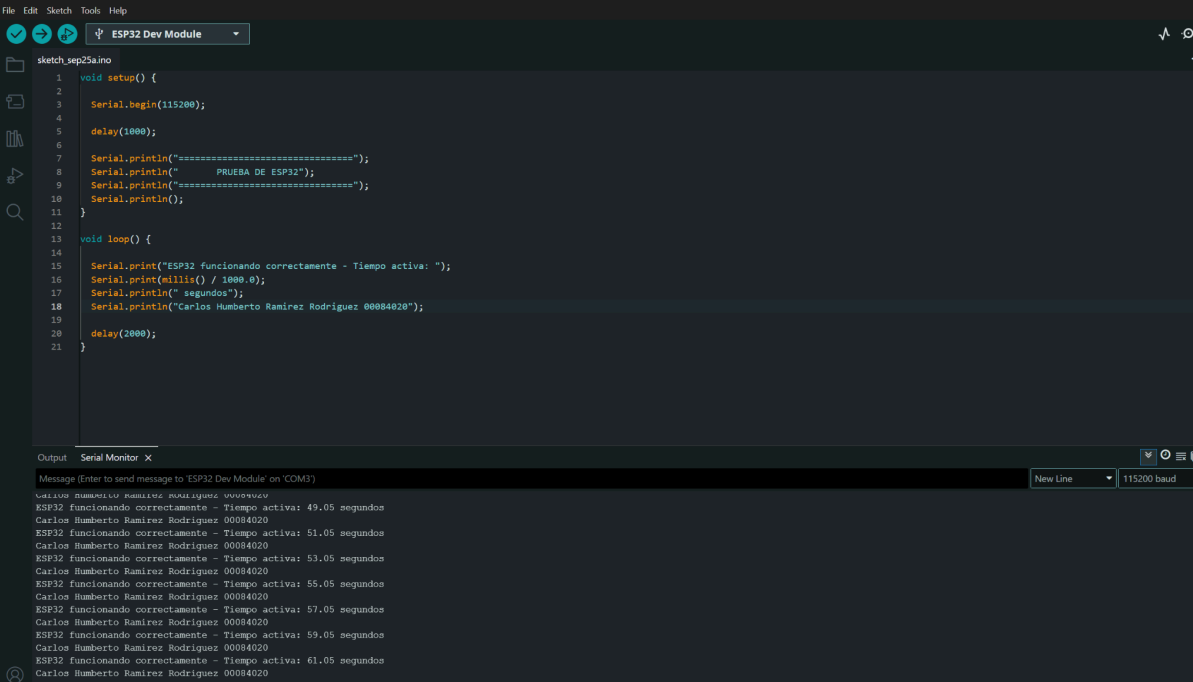

```
File Edit Sketch Tools Help
ESP32 Dev Module

sketch_sep25aino
1 void setup() {
2
3   Serial.begin(115200);
4
5   delay(1000);
6
7   Serial.println("=====");
8   Serial.println("    PRUEBA DE ESP32");
9   Serial.println("=====");
10  Serial.println();
11 }
12
13 void loop() {
14
15   Serial.print("ESP32 funcionando correctamente - Tiempo activa: ");
16   Serial.print(millis() / 1000.0);
17   Serial.println(" segundos");
18   Serial.println("Carlos Humberto Ramirez Rodriguez 00084020");
19
20   delay(2000);
21 }
```


Output Serial Monitor X

Message (Enter to send message to 'ESP32 Dev Module' on 'COM3')

New Line 115200 baud

sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 49.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020
sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 51.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020
sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 53.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020
sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 55.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020
sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 57.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020
sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 59.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020
sketch_sep25aino: ESP32 funcionando correctamente - Tiempo activa: 61.05 segundos
Carlos Humberto Ramirez Rodriguez 00084020

Prueba touch

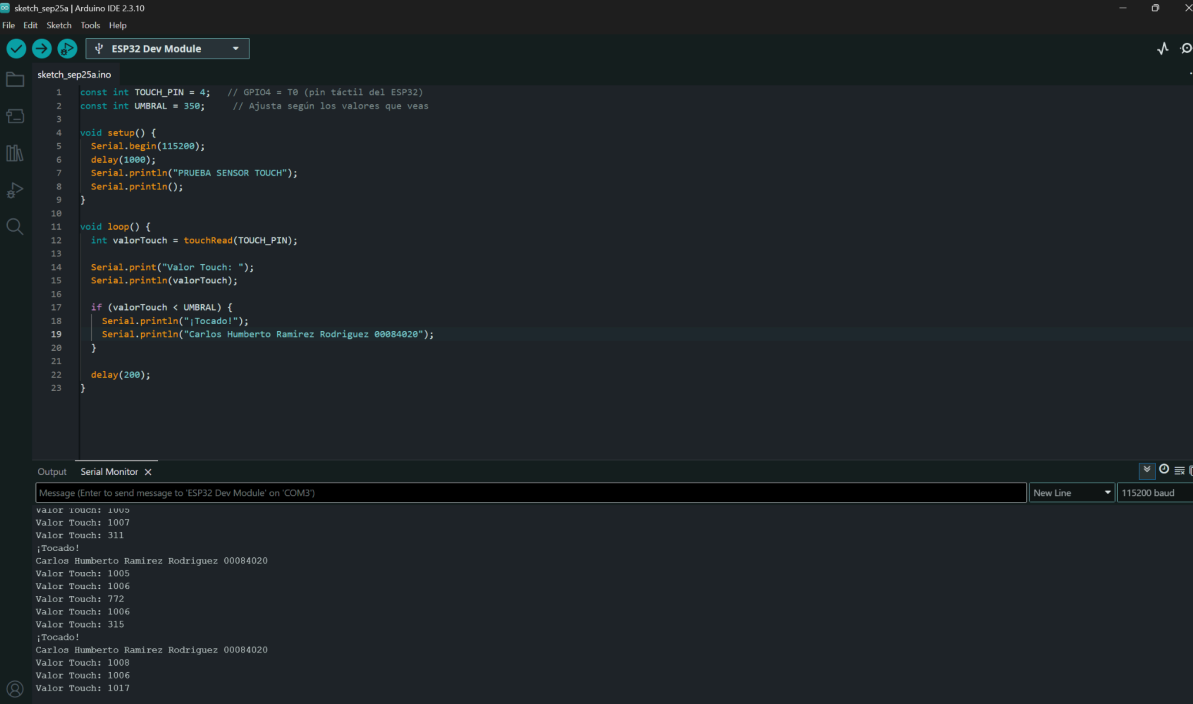

```
sketch_sep25a | Arduino IDE 2.3.10
File Edit Sketch Tools Help
ESP32 Dev Module

sketch_sep25aino
1 const int TOUCH_PIN = 4; // GPIO4 = T0 (pin táctil del ESP32)
2 const int UMBRAL = 350; // Ajusta según los valores que veas
3
4 void setup() {
5   Serial.begin(115200);
6   delay(1000);
7   Serial.println("PRUEBA SENSOR TOUCH");
8   Serial.println();
9 }
10
11 void loop() {
12   int valorTouch = touchRead(TOUCH_PIN);
13
14   Serial.print("Valor Touch: ");
15   Serial.println(valorTouch);
16
17   if (valorTouch < UMBRAL) {
18     Serial.println("¡Tocado!");
19     Serial.println("Carlos Humberto Ramirez Rodriguez 00084020");
20   }
21
22   delay(200);
23 }
```

Output Serial Monitor X


Message (Enter to send message to 'ESP32 Dev Module' on 'COM3')

New Line 115200 baud


sketch_sep25aino: Valor Touch: 1000
Valor Touch: 1007
Valor Touch: 311
¡Tocado!
Carlos Humberto Ramirez Rodriguez 00084020
Valor Touch: 1005
Valor Touch: 1006
Valor Touch: 772
Valor Touch: 1006
Valor Touch: 315
¡Tocado!
Carlos Humberto Ramirez Rodriguez 00084020
Valor Touch: 1008
Valor Touch: 1006
Valor Touch: 1017

Prueba	Medición
Sin tocar	1001
Al tocar	305
Umbral seleccionado	350

Prueba de touch

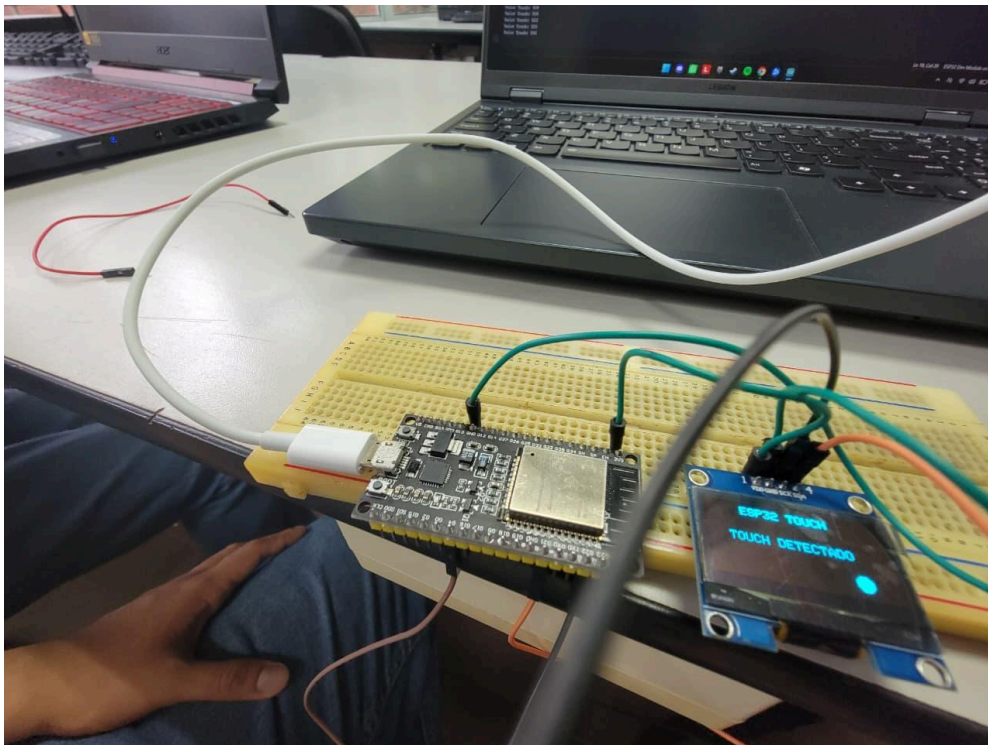

Prueba de touch doble

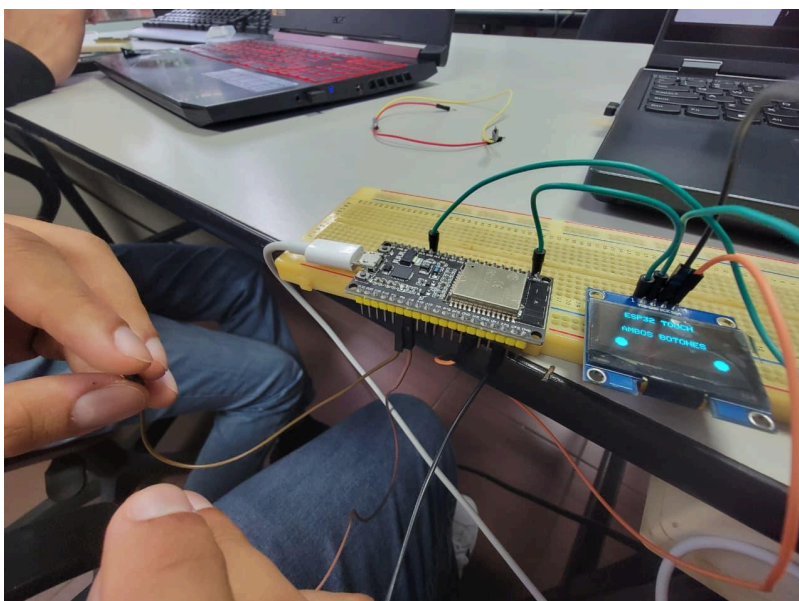

Adafruit account

[Shop](#) [Learn](#) [Blog](#) [Forums](#) **IO** [LIVE!](#) [AdaBox](#)

Hi, Carlos Ramirez | [Account](#)  0

 [Devices](#) [Feeds](#) [Dashboards](#) [Actions](#) [Power-Ups](#)

 [New Device](#)

RamirezC56 / Overview 

[Overview](#) [Privacy & Sharing](#) [My Plan](#) [My Data](#) [Activity](#)

 You are currently using a Adafruit IO Basic plan. For just \$10/month, upgrade to AIO+ to unlock unlimited devices, groups, feeds, dashboards, and more! [Learn about the other features and benefits of upgrading your account here.](#)

Account Status

Devices

0 of 2

Groups

1 of 5

Feeds

1 of 10

Dashboards

1 of 5

Data Rate

0 of 30

SMS Rate

0 of 0

Live Errors

No errors since page load.

Live Data (newest data at top)

No data since page load.

Connections

No connections.

My Dashboards

Dashboard Name
Welcome Dashboard

My Feeds

Feed Name	Last Value
Welcome Feed	