Exp No: 11
Date: 24/9/25 Routing at network layer.

a) Simulate Static routing protocol configuration using cisco packet Tracer.

Aim

To Simulate and Configure Static routing between networks using cisco packet Tracer, configure primary & backup static routers using administrative distance.

Requirements:

cisco packet Tracer.
Three routers - Routers 0, Router 1, 2
Pcs/end devices.
properly assigned Ip address

Observation:

A network topology consisting of Three routers, router 1, 2. was created in cisco packet Tracer, different networks were connected and were assigned suitable. Ip address.

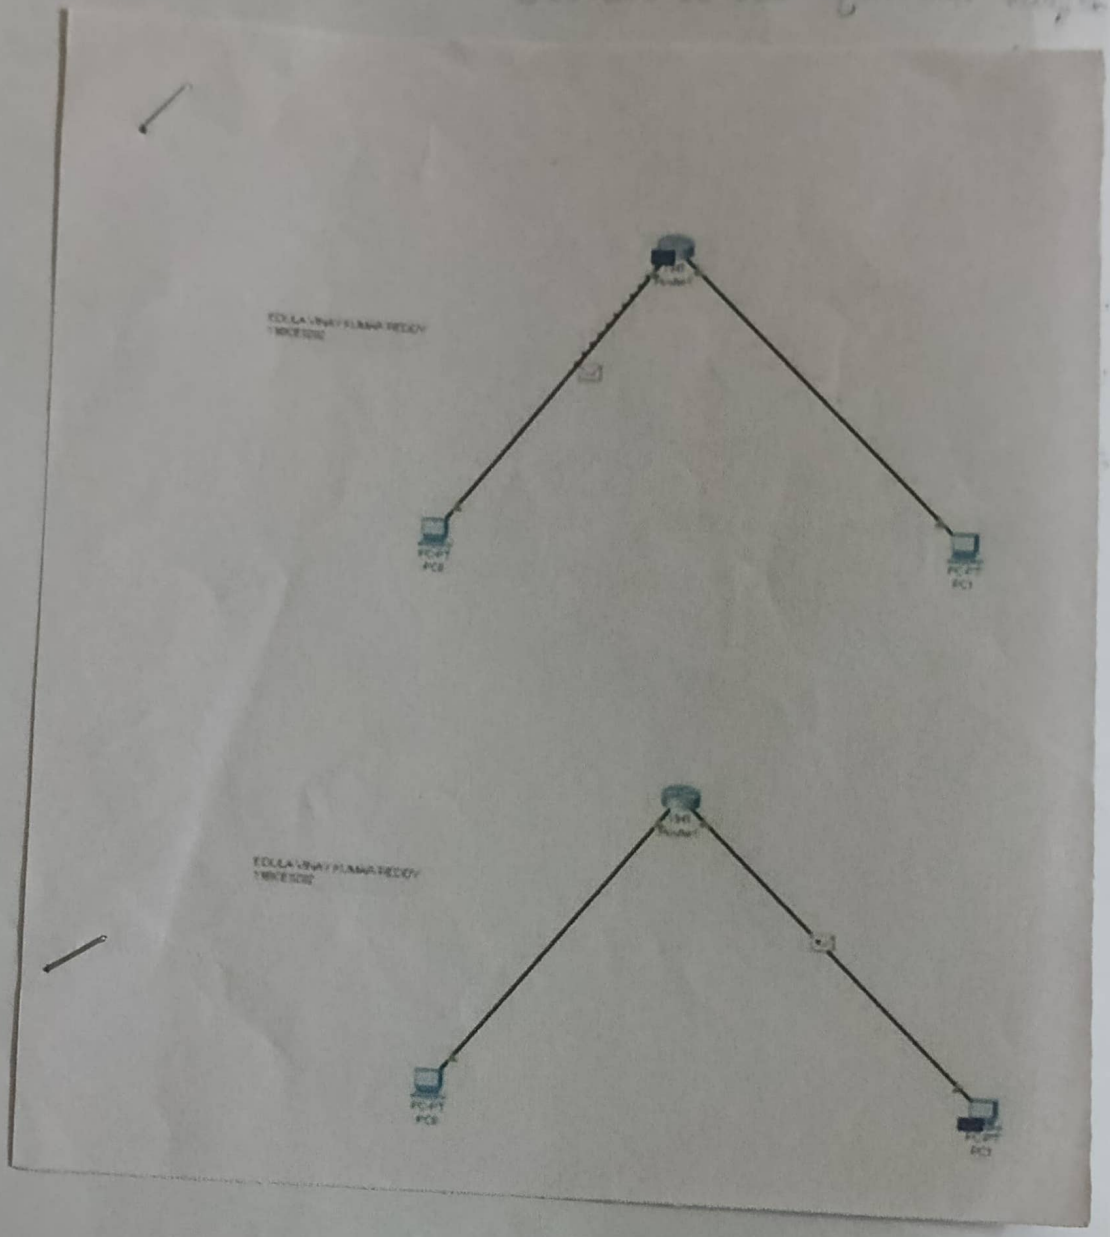
Router1:

Router1 was configured with static routers to the 10.0.0.0/8 to 40.0.0.0/8 networks the route through roughter 0 was assigned a lower administrative distance primary route the configuration was verified using show up route Static

Router 2:

was Configured with Static router to the 10.0.0.0/8 & 30.0.0.0/8 networks. The routing. table and verified using show ip router static Backup route verification:

The main link blw route & was disconnected to simulate a link failure connectivity was verified using link & trace.


PC-PT
PC0
PC-PT
PC1
PC-PT
PC0
PC-PT
PC1

Verification:

Show ip route static. The routing tables showed the configured static routes & their administrative using the pin command.

Deleting a static route:

Show ip route static. After deleting the main route, The backup route becomes the active.

Result:

Thus, Static routing was successfully configured & simulated using cisco packet tracer.