



CREATED FOR EXCELLENCE

POWER PROTECTION

HIGH-PERFORMANCE LUBRICANTS
FOR A MOVING WORLD

ENGINEERED
FOR A SMOOTH
RIDE



MOTOR OIL



MOTOR OIL FOR
DIESEL ENGINE



TRANSMISSION
FLUID



HYDRAULIC
FLUID



ANTIFREEZE
& COOLANTS




BRAKE
FLUID



WINDSCREEN
WASHER

info@valescooil.com
www.valescooil.com



www.valescooil.com

ADVANCED LUBRICATION FOR A BETTER DRIVE

Valesco develops high-quality lubricants that help keep engines cleaner, run cooler, and last longer. Our products are engineered to meet the demands of modern vehicles and harsh driving conditions.



MAXIMUM
PROTECTION



IMPROVED
PERFORMANCE



LONGER
ENGINE LIFE



A CLEANER
ENVIRONMENT

SYNTHETIC MOTOR OIL

MAXIMUM PERFORMANCE IN
EVERY CONDITION.



EXCELLENT WEAR
PROTECTION



BETTER FUEL
ECONOMY



HIGH THERMAL
STABILITY



CLEANER
ENGINES



EUROTEC GX7000
SAE 0W-20
API SN/CF
Fully Synthetic



EUROTEC GX7000
SAE 5W-40
API SN/CF
Fully Synthetic



DRIVE GL5000
SAE 10W-40
API SL/CF
Semi-Synthetic



XTREME GJ3000
SAE 15W-40
API SJ/CF
Mineral

BUILT FOR HEAVY DUTY

COMMERCIAL DIESEL MOTOR OIL

-  HELPS KEEP ENGINES CLEAN
-  EXCELLENT WEAR PROTECTION
-  HIGH THERMAL STABILITY
-  STABLE ENGINE PERFORMANCE



MAGNUS DF5000
SAE 10W-40
API CH-4 / CF-4
Mineral Motor Oil



TURBO MAX DI5000
SAE 10W-40
API CI-4
Mineral Motor Oil



X-TIR DG3000
SAE 15W-40
API CF-4/SG
Mineral Motor Oil




TURBO PLUS DL3000
SAE 15W-40
API CI-4/SL
Mineral Motor Oil

SHIFT WITH CONFIDENCE

ADVANCED PROTECTION
FOR MODERN TRANSMISSION

-  SMOOTH GEAR SHIFTING
-  EXCELLENT WEAR PROTECTION
-  HIGH THERMAL STABILITY
-  LONGER TRANSMISSION LIFE

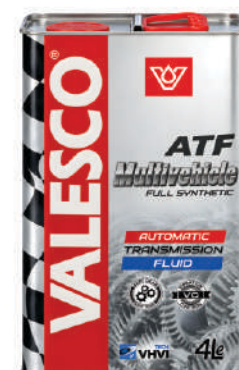

ATF MULTIVEHICLE
AUTOMATIC FLUID
Fully Synthetic
Versatile Application



ATF DEX III
AUTOMATIC FLUID
Fully Synthetic
Versatile Application



MTF TOTUM
SAE 75W-40
API GL-4
Fully Synthetic

POWER UNDER PRESSURE

SUPERIOR PROTECTION
FOR TOUGH APPLICATION



EXCELLENT THERMAL
STABILITY



WEAR OXIDATION
PROTECTION



HIGH LOAD
PERFORMANCE



RELIABLE IN
HARSH CONDITION



HYDRO HLP 32
VHVI Synthetic
Base Oils



HYDRO HLP 46
VHVI Synthetic
Base Oils



HYDRO HLP 68
VHVI Synthetic
Base Oils

SAFETY IN EVERY STOP

HIGH-PERFORMANCE
BRAKE FLUIDS



HIGH
BOILING POINT



RELIABLE BRAKING
PERFORMANCE



EXCELLENT
FLUID STABILITY



COMPATIBLE WITH
MODERN SYSTEMS



DOT3
Synthetic Based



DOT4
Synthetic Based

260°C
ERPB

165°C
WERB

-40°C
VISCO.

1400 cST
MAX

PROTECT EVERY SEASON

RELIABLE COOLING SYSTEM PROTECTION
IN EXTREME TEMPERATURES



-  PROTECTS AGAINST OVERHEATING
-  CORROSION PROTECTION
-  LONGER ENGINE LIFE
-  PREVENTS FREEZING



GENUINE G12++
LOBRID tech
-45°C



G11 RED
FOR ALL SEASON
-40°C/ +120°C



G11 BLUE
FOR ALL SEASON
-40°C/ +120°C



G11 GREEN
FOR ALL SEASON
-40°C/ +120°C

DRIVE WITH CLARITY

WINTER WINDSCREEN
WASHER FLUID



-  FREEZE PROTECTION TO -25°C
-  SAFE FOR GLASS & WIPERS
-  CRYSTAL CLEAR VISIBILITY
-  STREAK-FREE CLEANING



WINDSCREEN WASHER PINK
-25°C



WINDSCREEN WASHER GREEN
-25°C



WINDSCREEN WASHER YELLOW
-25°C

CLASSIFICATION OF ENGINE OILS BY VISCOSITY SAE J 300 (DEC. 1999, IN EFFECT SINCE JUNE 2001)

Viscosity class	Dynamic viscosity, sP, not higher, at °C		Kinematic viscosity at 100 °C, MM/s		Dynamic viscosity at 150 °C and 10 °C, sP, not less
	Cold start simulation (CCS)	Pumpability	not less	not higher	
0W	6200 at -35	60 000 at -40	3,8	-	-
5W	6600 at -30	60 000 at -35	3,8	-	-
10W	7000 at -25	60 000 at -30	4,1	-	-
15W	7000 at -20	60 000 at -25	5,6	-	-
20W	9500 at -15	60 000 at -20	5,6	-	-
25W	13 000 at -10	60 000 при -15	9,3	-	-
20	-	-	6,9	<9,3	2,6
30	-	-	9,3	<12,5	2,9
40	-	-	12,5	<16,3	3,5*
40	-	-	12,5	<16,3	3,7**
50	-	-	16,3	<21,9	3,7
60	-	-	21,9	<26,1	3,7

* For classes SAE 0W-40, 5W-40, 10W-40. ** For classes SAE 15W-40, 20W-40, 25W-40, 40.

CLASSIFICATION OF INDUSTRIAL OILS BY VISCOSITY ISO 3448

ISO viscosity grade	The maximum oil viscosity value at 40 °C, MM/s	ISO viscosity grade	The maximum oil viscosity value at 40 °C, MM/s
2	1,98-2,42	68	61,2-74,8
3	2,88-3,52	100	90,0-110,0
5	4,14-5,06	150	135-165
7	6,12-7,48	220	198-242
10	9,00-11,0	320	288-352
15	13,5-16,5	460	414-506
22	19,8-24,2	680	612-748
32	28,8-35,2	1000	900-1100
40	41,4-50,6	1500	1350-1650

CLASSIFICATION OF GEAR OILS BY VISCOSITY SAE J 306 (JULY 1998)

Viscosity class	The maximum temperature at which dynamic viscosity does not exceed 150 000 sP, °C	Dynamic viscosity at 100 °C, MM/s	
		not less	not higher
70W	-55	4,1	-
75W	-40	4,1	-
80W	-26	7,0	-
85W	-12	11,0	-
80	-	7,0	11,0
85	-	11,0	13,5
90	-	13,5	24,0
140	-	24,0	32,5
250	-	41,0	-

RECOMMENDATIONS FOR THE SELECTION OF THE VISCOSITY CLASS OF THE WORKING FLUID OF THE HYDRAULIC SYSTEM

When choosing the viscosity class of the working fluid for the hydraulic system, it is necessary to be guided by the requirements of the manufacturers of equipment and components of the hydraulic system.

Average values of the required viscosity:

not less than 10 cSt to ensure sufficient strength of the lubricating film,

no more than 1000 cSt to ensure the pumpability of the working fluid in the hydraulic system.

ENGINE OIL VISCOSITY CLASSES ACCORDING TO SAE CLASSIFICATION

