

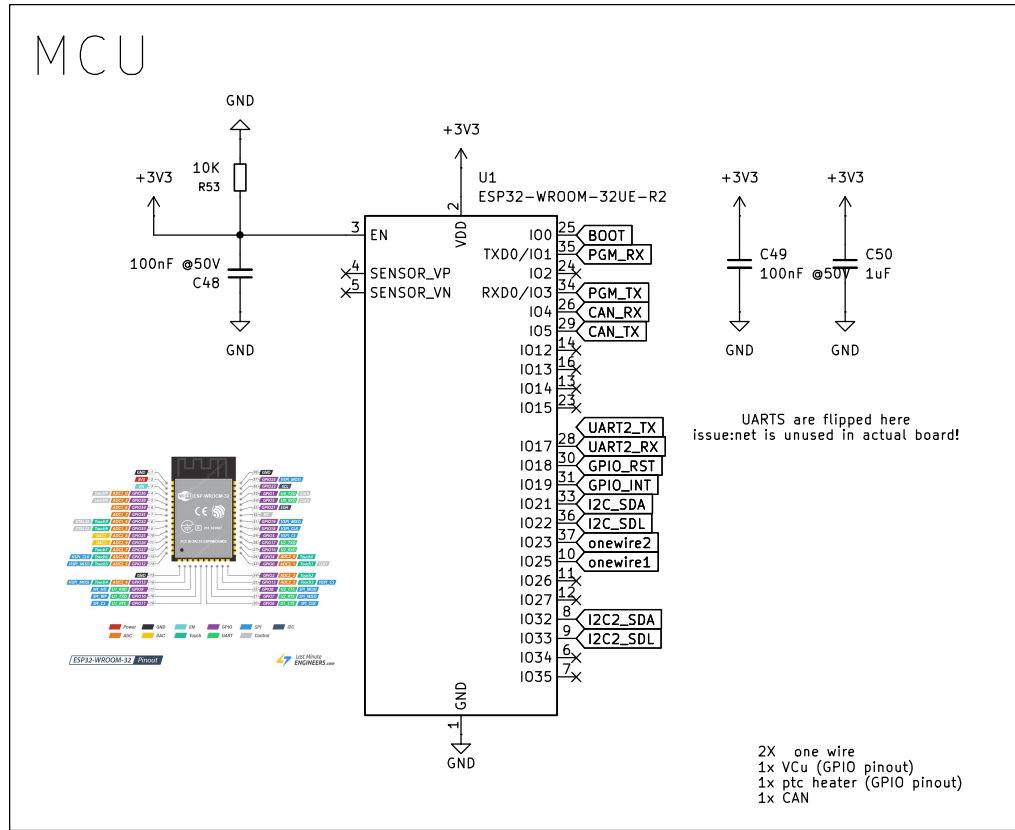





MCU

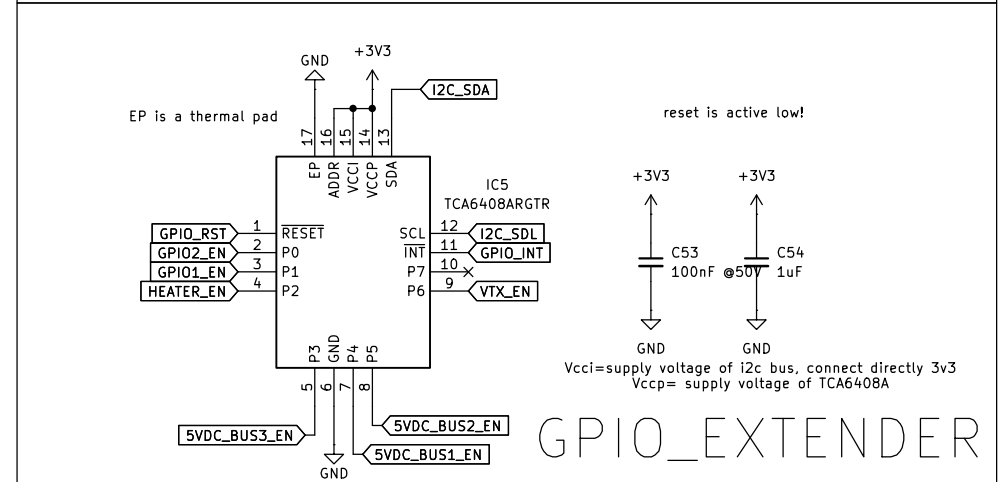

CAN

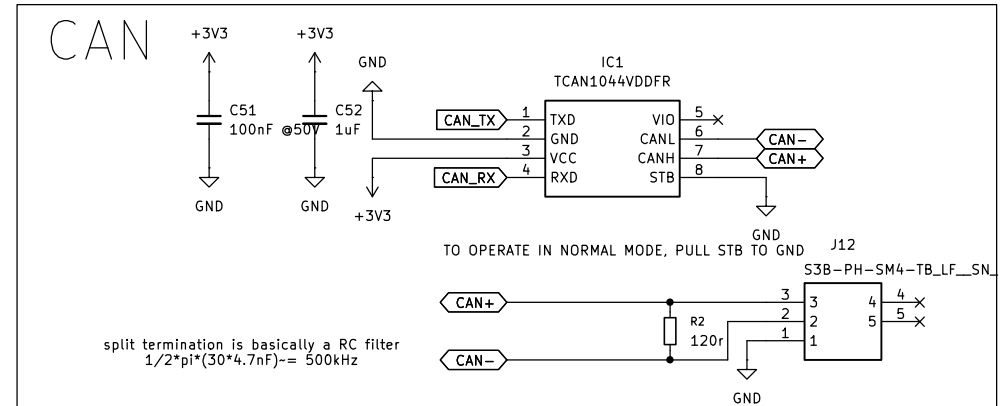

pullup resistors

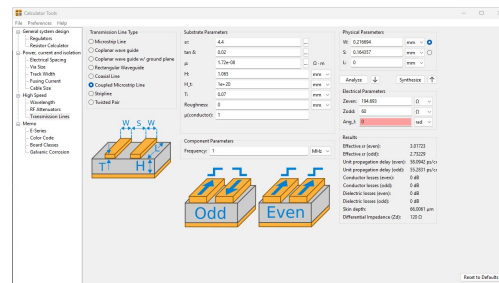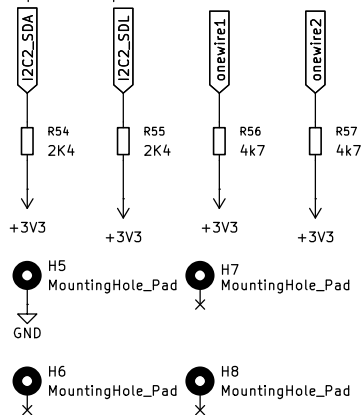



PG:


The signal is an active high and open drain output which can be connected to a voltage source through an external pullup resistor, RPU. This voltage source can be VOUT from the TPS22997 device or another external voltage.

CURRENT SENSE_ VBAT


!Device Address!
AO connected to VS:1000000
AO connected to GND:1000001




Alert pin: Open drain(pulled to ground) output, effective when limits exceeded or conversion ready

Vbat current sense:
Rshunt< Vsenese/I max
Vsense= ± 81.92 mV (ADCRANGE = 0), I_{max}=12[lim of all load switches], Rshunt=6.827mohm
Power= $6.8e-03 \cdot 12^2 = 0.9792$





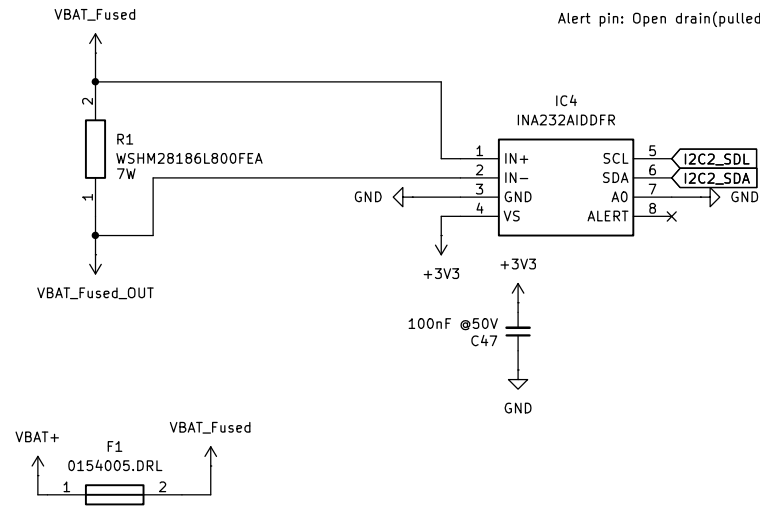


Fixed Output at 3.3V!

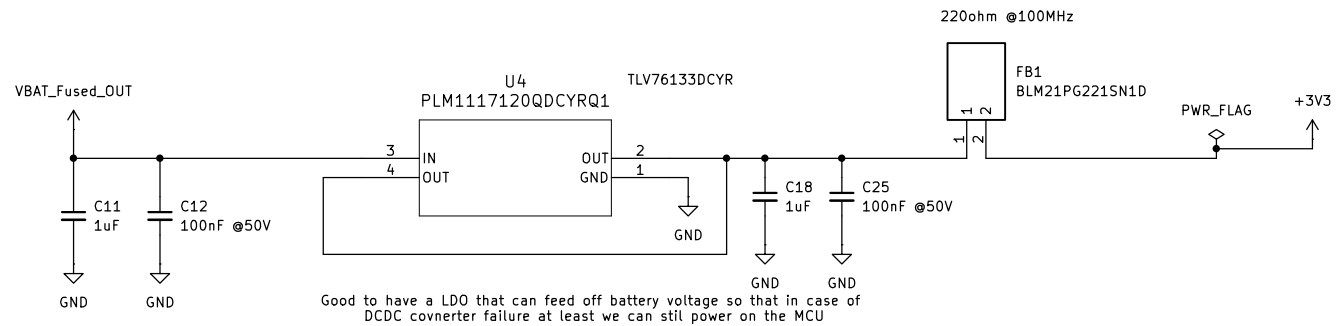


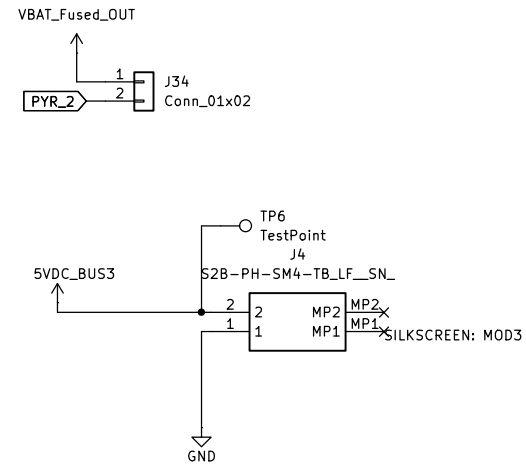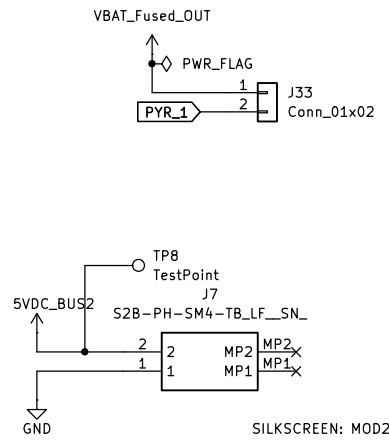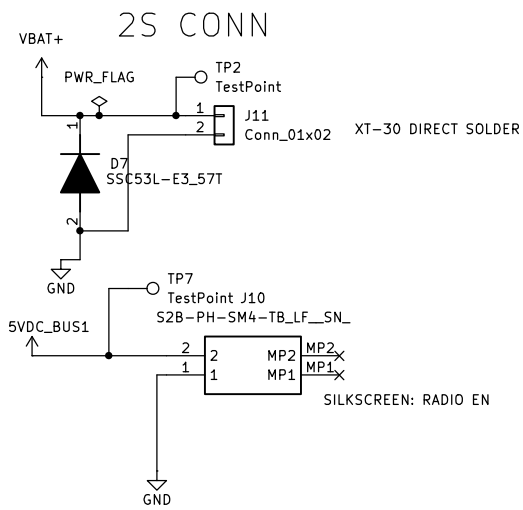

FROM RADMOD

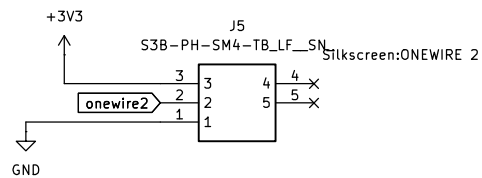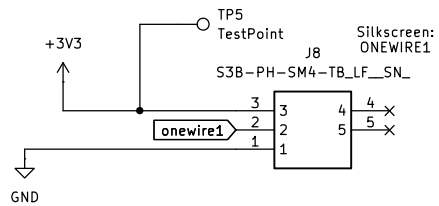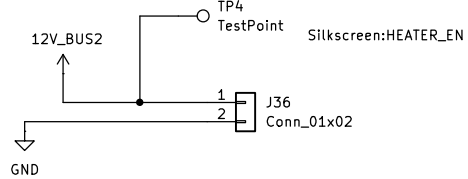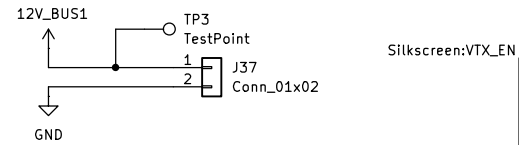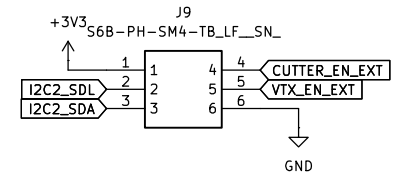

PROGRAMMING

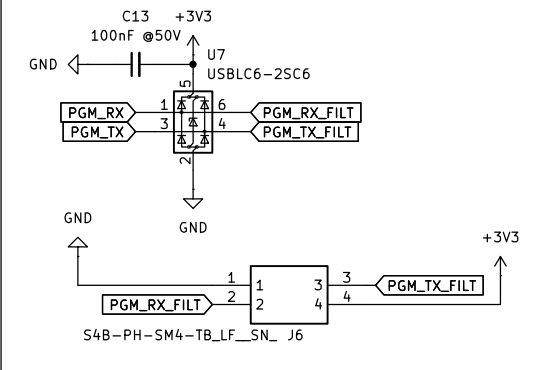

BOOT MODE SWITCH

