




BASIC DIMENSIONS:-





MOUNTING DETAILS:-

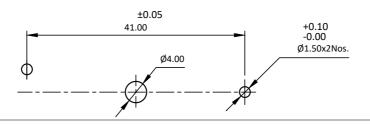

SPECIFICATION TABLE:-

SR.NO	PARAN	1ETER	SPECIFICATION						
1	Туре		PCB mounting fuse holder						
2	Fuse Link Size		Ø6.30 x 32.00						
3	V/A Rating		10 A, 250 V AC						
4	Contact Resistance(Initia	1)	10 m Ohms Max.						
5	Insulation Resistance at 5	000 V DC	1000 M Ohms Min.						
6	H.V.Break Down Test(1-N	/linute)	2 KV AC						
7	Mounting		PCB-type						
8	Terminals		Solder-type						
9	Permissible Temp.	(a) With/Without Load	-20°C TO +85°C						
		(b) For Soldering	270°C for 5 Sec. Max.						
10	Material	(a) Body	Nylon						
		(b) Terminals	Brass, Tin Plating						
11	Reference Standard		IEC-60127-6						
12	Compliance marking		CC, ROHS (On Request)						

								APP						5_4	<u> </u>	Diet	E 1 1/	agal F	ivo Star	
								СНК							1	Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India				
								DRN	11.10.02		MDT	ELCOM MH - 416236, India Elcom International Pvt. Ltd.								
REV		IS		WAS	DATE	SIGN	APP.	BY	DATE		SIGN						elcom-in.com			
UNSP.TOLERANCE DIMNS.			DIMNS. IN	(,		SCALE		PROJECTION	PROJECTION		DRAWING NUMBER									
OVER	-	1	10	mm	Max.		NTS.		$\dashv \vdash \vdash $	*									REVISION	
UP TO	1	10	-		plating deta				 	⊕	4 05 4	P P	$P \mid E$	3 F	19	0	0	5		
±	0.2	0.3	0.5	Unspecifie	d colour is Black, GF:Glass filled.					Т	1 OF 1				1				0	

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice