

A Flagship Product Born for the Industry




Catalog

OI.

Core Functions .50

Product Info 03.

Applications

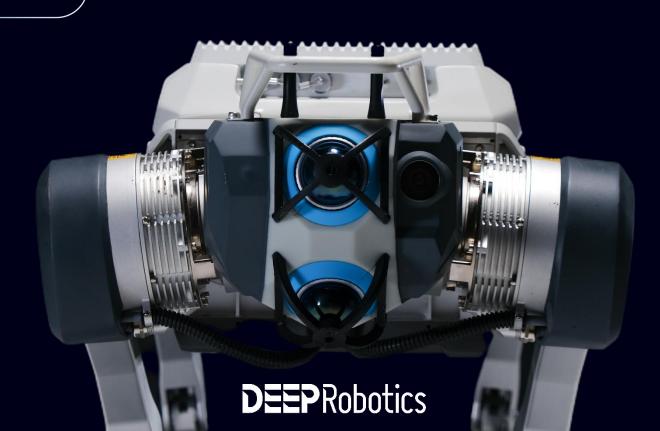





Undaunted by

extreme weather



Surmounting obstacles,

responding promptly



Fusion perception

lights up the darkness



Safe, efficient and

highly collaborative



Extra-long endurance,

quick battery swaps




Stable, reliable

auto-charging

Core functions.

DEEPRobotics **DI**

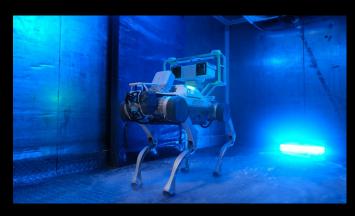

Undaunted

by extreme weather

Temperatures can vary markedly through the seasons and in different regions, and this needs to be taken into account when planning for outdoor inspection and rescue work. As a flagship model for the industry, X30's operating temperature range has greatly increased. It has been successfully tested in real-world scenarios in temperatures from minus 20°C to plus 55°C. It has also been vigorously tested at the IP67 protection level.



Surmounting obstacles,

responding promptly

During the implementation of inspection, security, rescue and other tasks, X30 is capable of climbing up and down 45-degree stairs with unprecedented speed and a dexterous posture. It braves open-riser staircases with ease, responds to task requirements on the spur of the moment, and quickly adapts to more complex scenarios and blind spots.



Fusion perception

lights up the darkness

Traditional inspection and rescue operations can take place at any time, day or night, when the lighting conditions on site are changeable and uncontrollable. With its fusion perception capabilities, X30 can carry out such tasks regardless of the light environment, be it over-bright, dim, flickering or even complete darkness.

Core functions.

DEEPRobotics **DI**.



Safe,

efficient and highly collaborative

X30 uses light interaction to bring the controller up to speed about its working status. In the meantime, it autonomously avoids colliding into random moving objects. Coupled with an emergency stop button, X30 helps protect the safety of other parties and mobile platforms in industrial scenarios.



Extra-long endurance, quick battery swaps

An extra-long battery life is standard a shared expectation for industry-level quadruped robots in many scenarios. X30 features a 25% increase in endurance when laden with mounts. On top of this, its battery has a quick-release capability to expedite battery changes. This design ensures that special tasks can be completed quickly, which is vital in the event of industrial emergencies.



Stable,

reliable auto-charging


Problems such as lighting, grime and dust in various industrial scenarios can affect the efficiency of traditional charging solutions. DEEP Robotics has independently developed a new generation of integrated positioning solutions to ensure a smoother and more effective charging process.

Catalog

Care Functions 02.

Product Info 03.

Applications

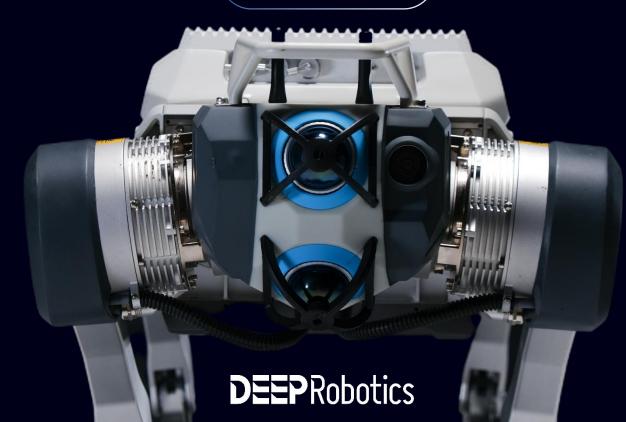

DEEPRobotics 02.

X30

Weight:

56kg

Max. Speed: ≥4m/s

Protection:

Slope: ≤45°

Load: ≥20kg

Step/Obstacle's H: ≥20cm

Standing size: 1000*695*470 (mm)


Endurance: 2.5-4h

IP6Mileage: ≥10km

Temperature: $-20^{\circ} \sim 55^{\circ}$

Interface:

Ethernet Output power supply (72V BAT)

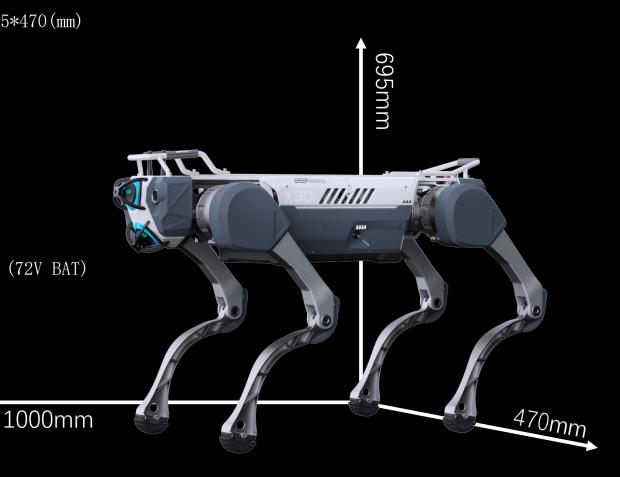

DEEPRobotics **D2.**

X30 Pro

Weight: 59kg Standing size: 1000*715*470(mm)

Max. Speed: $\geqslant 4m/s$ Endurance: 2.5-4h


Protection: IPM7leage: ≥10km

Slope: $\leq 45^{\circ}$ Temperature: $-20^{\circ} \sim 55^{\circ}$

Load: ≥20kg Interface:

USB2.0 USB3.0 Ethernet WiFi

Step/Obstacle's H: ≥20cm Output power supply (5V 12V 24V)

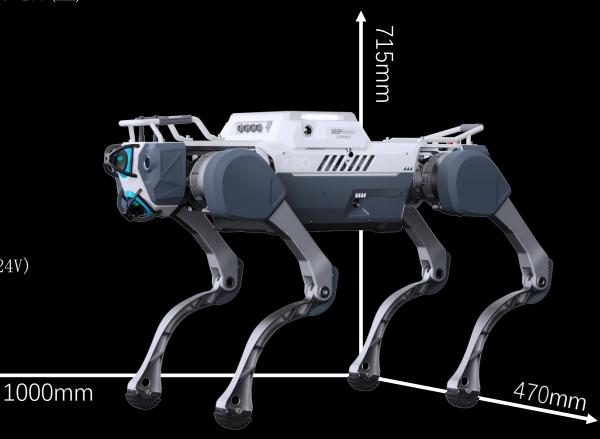

DEEPRobotics 02.

X30

01. Stair climbing perception

02. Auto-charging

03. Obstacle stop

X30 Pro

- 04. Fusion calibration algorithm
- 05. Multi-sensor fusion mapping algorithm
- 06. Multi-sensor fusion localization algorithm
- 07. Navigation planning algorithm
- 08. Industrial-level navigation interface (12V 24V power supply)
- 09. Smart light interaction interface

DEEPRobotics 02.

Intelligent Controller

As the equipped intelligent controller for X30, the navigation host motherboard simultaneously handles business-related program processing, primarily providing functions such as map construction and location navigation. It integrates a gigabit network switch and multiple voltage stabilization modules.



DEEPRobotics **D2**.

Charging Point

Dimension: 1135*900*845 L*W*H

Input: 220V/4.9A

Output: 84V/8A



DEEPRobotics **D2**.

► Plug-in Battery

Dimension: 280*240*82 L*W*H

Rated voltage: 72V

Rated capacity: 22.4Ah

Rated energy: 1612.8Wh




Catalog

OI.

Care Functions .50

Product Info 03.

Applications

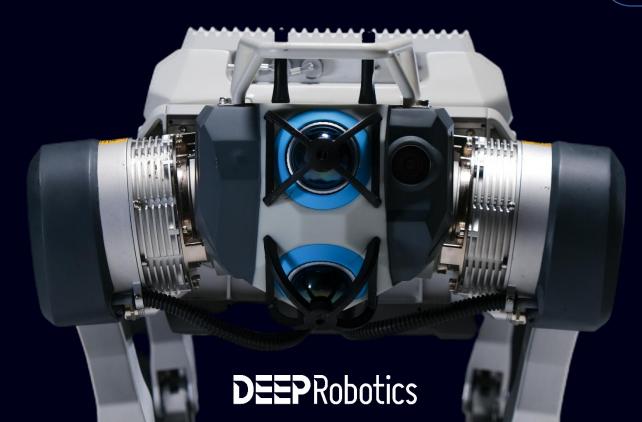

Applications.

Power Patrol Inspection DEEP Robotics' quadruped robots are currently conducting unmanned inspections in various substations and underground cable tunnels worldwide. They are replacing manual, highintensity, and repetitive inspection tasks in adverse weather and environmental conditions.



DEEPRobotics **D3.**



DEPRODUICS

@DEEP ROBOTICS





