
Ex:No:10 Internetworking with routers in CISCO packet Tracer Simulator

a) Aim:

Internetworking with routers in CISCO Packet tracer simulator.

d) Design and configure a simple network using a router.

In this network, a router and 2 PCs are used. Computers are connected with routers using a Copper straight-through cable. After forming the network, to check network connectivity a simple PDU is transferred from PC0 to PC1.

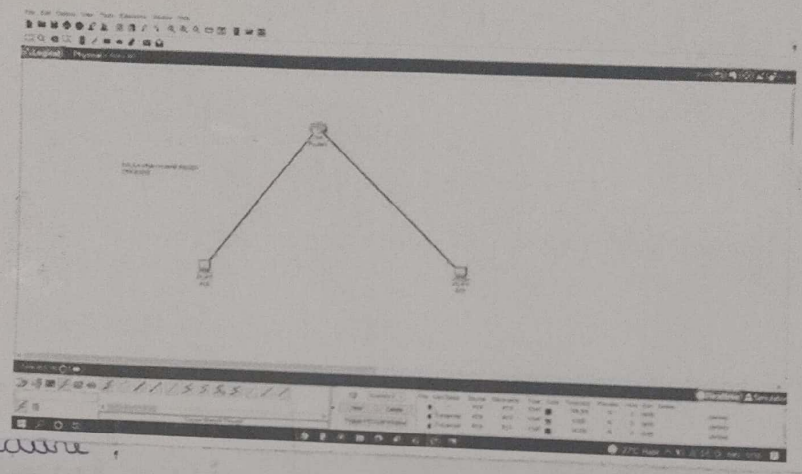

Procedure:

Step 1: (Configuring router 1):

i) Select the router and Open CLI.

ii) Press Enter to start configuring router 1.

iii) Type enable to activate the privileged mode.

Step 2:

i) Assign IP addresses to every PC in the network.

ii) Assign the default gateway of PC0 as 192.168.10.1

iii) Assign the default gateway of PC1 as 192.168.20.1


Step 3:


i) Connect fast ethernet 0 port of PC0 with fast ethernet 0/0 port of router 1 using a copper straight through cable.

Scanned with OKEN Scanner

ii) Connect fastethernet 0 port of PC1 with fast ethernet 0/1 port of router1 using a copper straight through cable.

| Device name | IP address (0/0) | Subnet mask. | IP address (0/1) | Subnet mask |
|---|---|---|---|---|
| Router 1 | 192.168.10.1 | 255.255.255.0 | 192.168.20.1 | 255.255.255.0 |

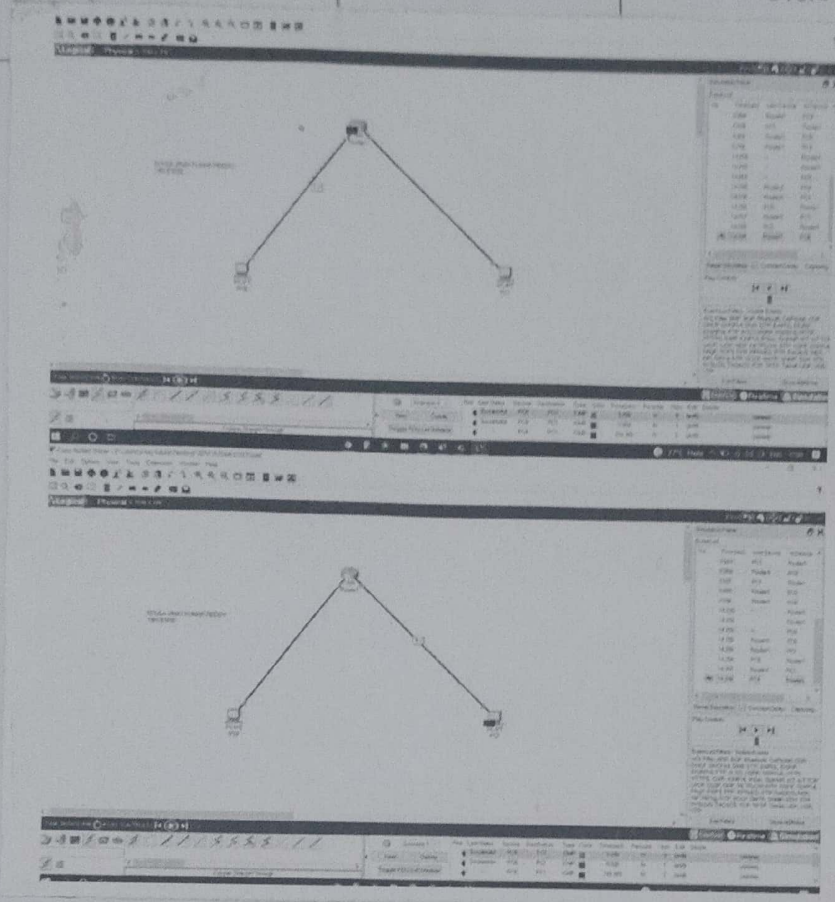

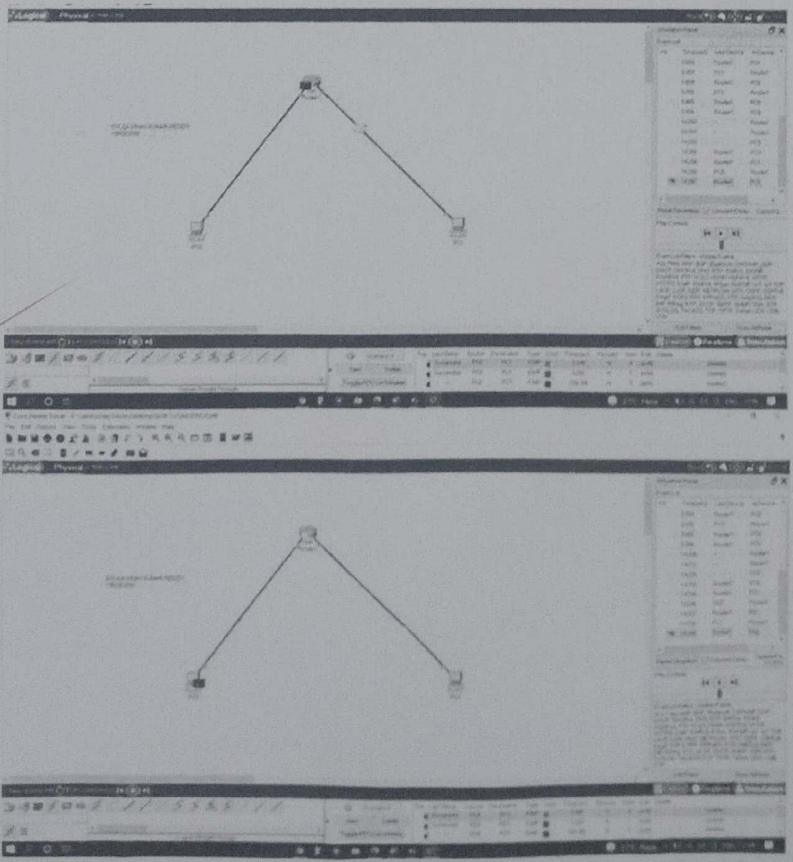

Scanned with OKEN Scanner