
Ex:NO:11 Simulate Static routing Configuration using CISCO packet Tracer.

Aim:

Simulate static routing Configuration using CISCO packet tracer.

Setting up a lab:

Create a packet tracer lab as shown in the following image or download the following and load it on packet tracer with initial IP configuration.

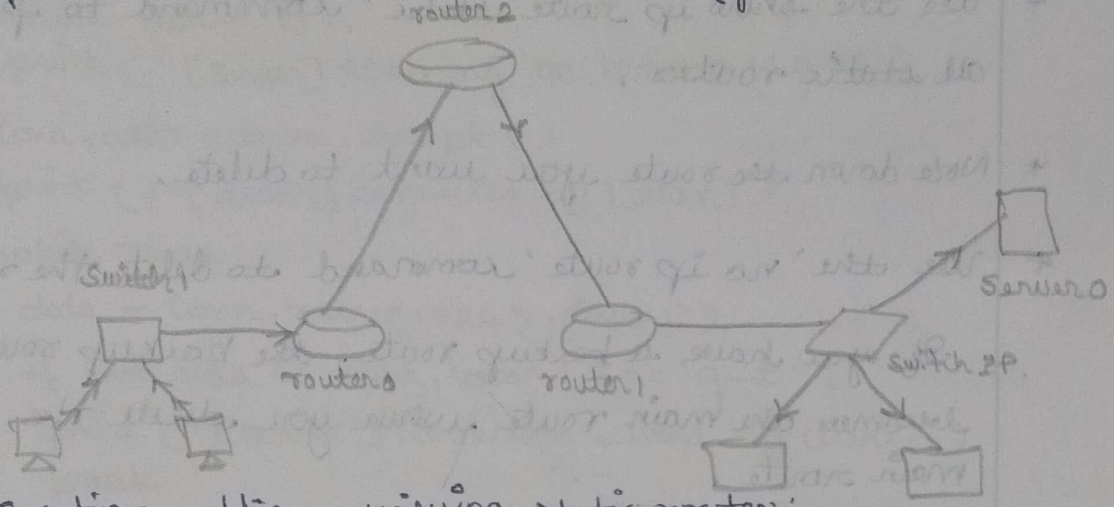

Creating, adding, verifying static routes:

Routers automatically learn their Connected networks, we only need to add routes for the networks that are not available on the router's interfaces, for example, network 10.0.0.0/8, 20.0.0.0/8 and 40.0.0.0/8 are directly connected to router().

Router 1 requirements:

* Create two routes for network 10.0.0.0/8 and Configure the first route as the main route and the second route as a backup route.
* Verify the router adds only main routes to the routing table.

Router 2 requirements:

Create static routes for network 10.0.0.0/8 and network 30.0.0.0/8 and verify the router adds both

Scanned with OKEN Scanner

routes to the routing table.

Verifying static routing:

On router(), we configured two routes for network 30.0.0.0/8. These routes are via router 1 and via router 2. We set the first route as the main route and the second route as the backup route.

Deleting a static route:

To delete a static route, use the following steps.

* Use the 'show ip route static' command to print all static routes.
* Note down the route you want to delete.
* Use the 'no ip route' command to delete the route.

If you have a backup route, the backup route becomes the main route when you delete the main route.

Router() (config)# router rip
router() (config-router)# network.
10.0.0.0
router() (config-router)# network 192.168.1.252.

⇒ router rip command tell router to enable the RIP routing protocol.

Network command allows us to specify the networks which we want to advertise.

Scanned with OKEN Scanner