Ex.No: 8b Configuration of wireless LAN using CISCO packet Tracer.

Aim:

Configuration of wireless LAN using CISCO packet tracer.

Design a topology with 3 Pc's connected from linksys wireless routers.

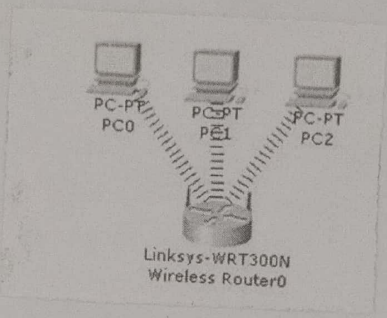

Perform following configuration:

* Configure Static IP on PC and wireless router.
* Set SSID to mother network.
* Set IP address of router to 192.168.0.1, PC0 to 192.168.02, PC1 to 192.168.0.3 and PC2 to 192.168.0.4
* Secure your network by configuring WAP key on router.
* Connect Pc by using WAP key.

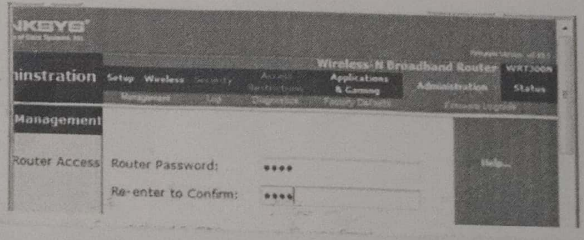

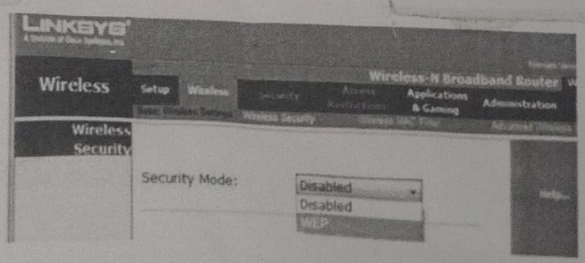

Scanned with OKEN Scanner

Key1 to 0123456789

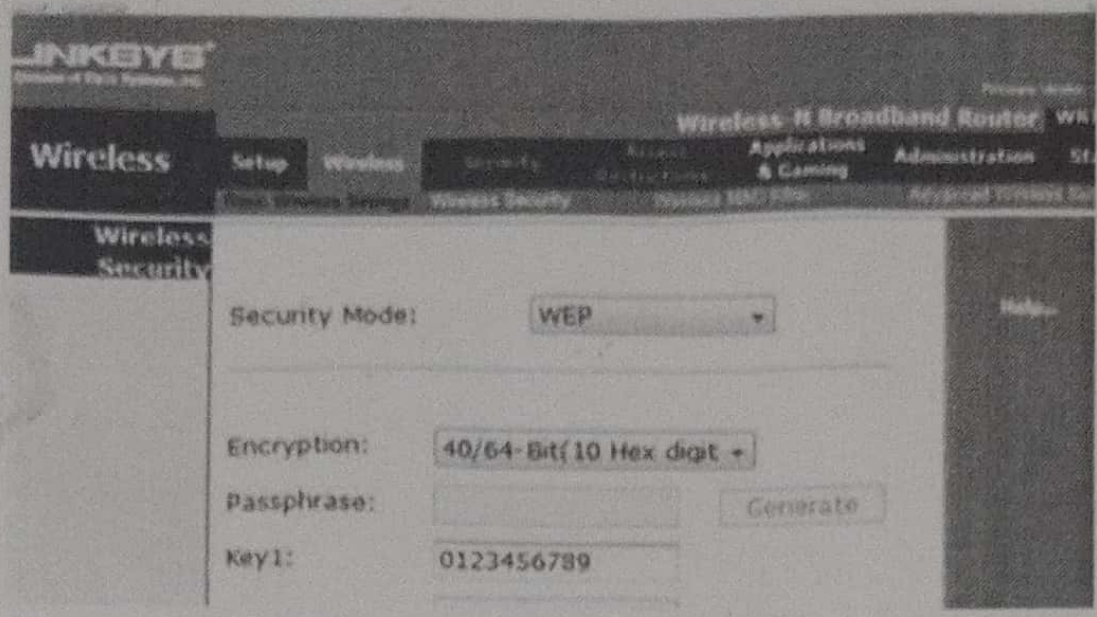

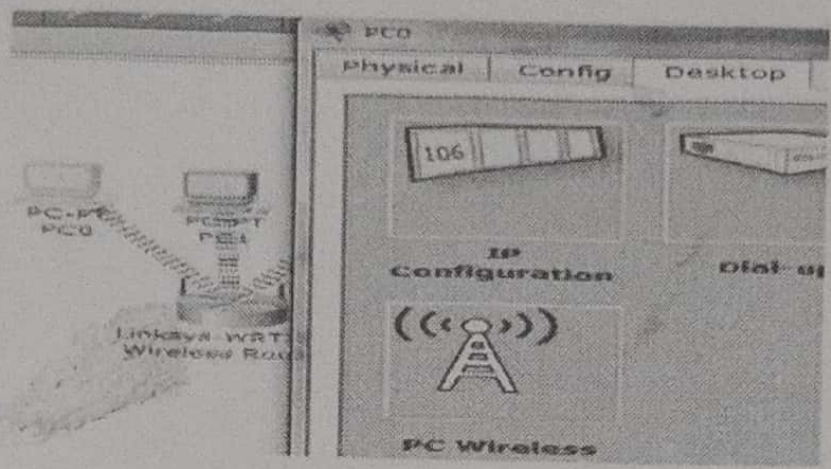

llck on connect tab and click on Refresh button

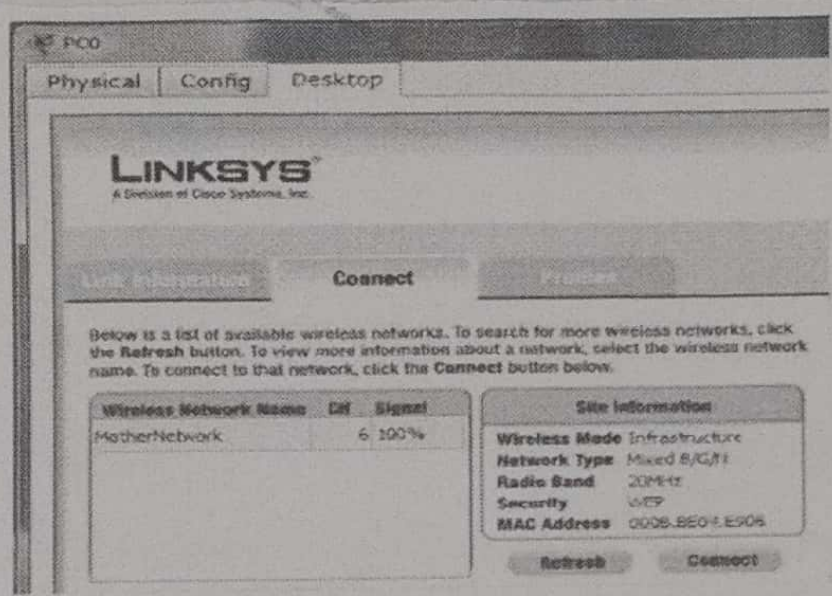

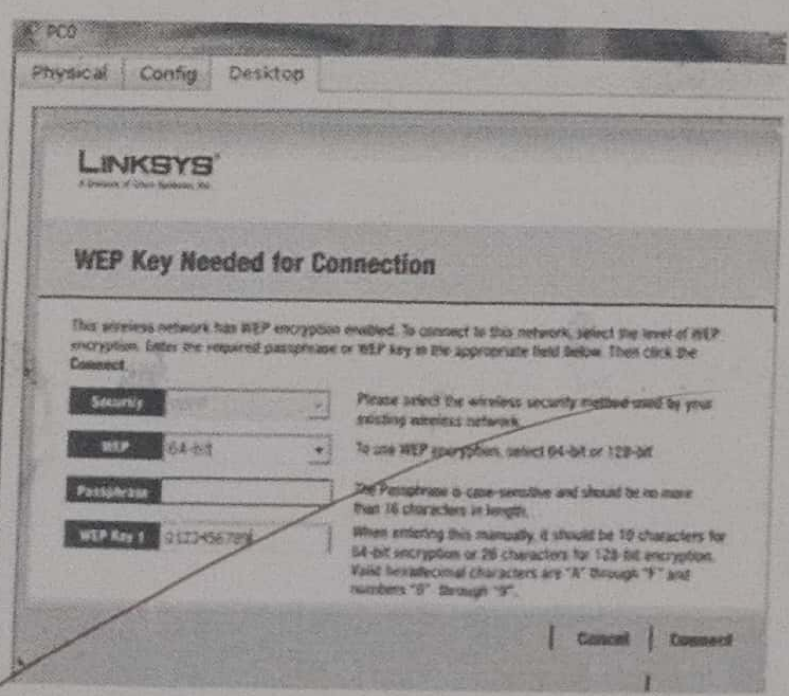

connect you with wireless router.

u can see in image below that system is connected. And PCI card is

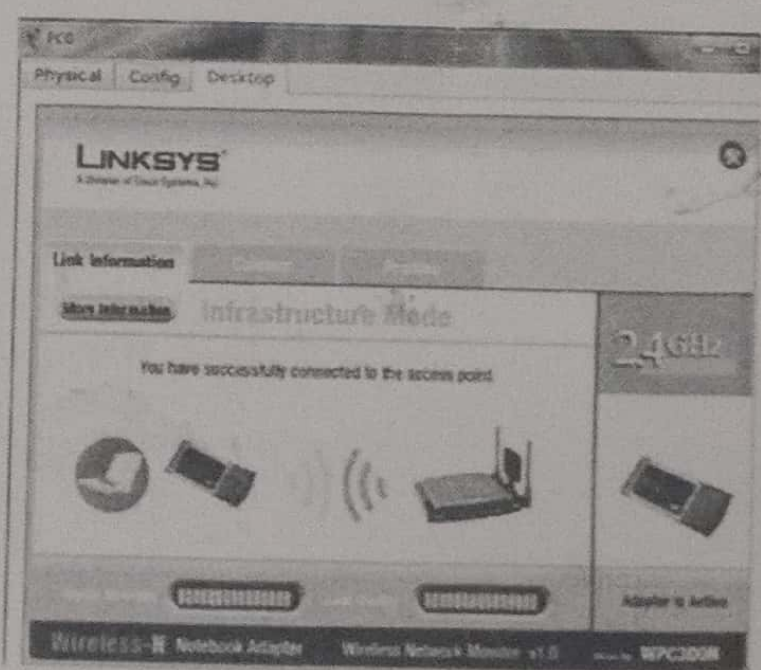

Student Observation:

c) What is SSID of a wireless router?

⇒ It is the name of a wireless network / router used to identify and connect to a Wi-Fi network.

d) What is the security key in a wireless router?

⇒ It is the password used to authenticate and secure a wireless network.

e) Configure a simple wireless LAN using a real access point?

⇒ i) Connect the access point to the computer.

ii) Open the router's configuration page.

iii) Set the SSID.

iv) Select a security method such as WAP2 / WPA3.

v) Set a password.

vi) Save the configuration & restart the router if required.

vii) Test connectivity using ping between the connected PCs.

Scanned with OKEN Scanner