



C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

```

Connection-specific DNS Suffix . : 
Autoconfiguration IP Address. . . : 169.254.173.75
Subnet Mask . . . . . : 255.255.0.0
Default Gateway . . . . . : 

```

```
C:\Documents and Settings\user>ipconfig
```

Windows LP Configuration

Ethernet adapter Local Area Connection:

```

Connection-specific DNS Suffix . : 
Autconfiguration IP Address. . . : 169.254.173.75
Subnet Mask . . . . . : 255.255.0.0
Default Gateway . . . . . : 

```

```
C:\Documents and Settings\user>inconfig
```

Windows IP Configuration

Ethernet adapter Local Area Connection:

```

Connection-specific DNS Suffix . : 
IP Address. . . . . : 60.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 

```

```
C:\Documents and Settings\user>ping 50.0.0.10
```

```
Pinging 50.0.0.10 with 32 bytes of data:
```

```
Destination host unreachable.  
Destination host unreachable.  
Destination host unreachable.  
Destination host unreachable.
```

Ping statistics for 50.0.0.10:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

```
C:\Documents and Settings\user>route add 50.0.0.0 mask 255.0.0.0 60.0.0.1
```

C:\Documents and Settings\user>

```
C:\Documents and Settings\user>
```

C:\Documents and Settings\user>

```
C:\Documents and Settings\user>
```

```
C:\Documents and Settings\user>
```

```
C:\Documents and Settings\user>
```

```
C:\Documents and Settings\user>
```

C:\WINDOWS\system32\cmd.exe

Interface List

0x1 MS TCP Loopback interface
 0x2 ...50 86 5f 09 50 00 Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:

Network	Destination	Netmask	Gateway	Interface	Metric
60.0.0.0	255.0.0.0	60.0.0.10	60.0.0.10	10	
60.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10	
60.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	10	
127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1	
224.0.0.0	240.0.0.0	60.0.0.10	60.0.0.10	10	
255.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	1	

Persistent Routes:

None

C:\Documents and Settings\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Destination host unreachable.
 Destination host unreachable.
 Destination host unreachable.
 Destination host unreachable.

Ping statistics for 50.0.0.10:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss).

C:\Documents and Settings\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Request timed out.
 Request timed out.
 Request timed out.
 Request timed out.

Ping statistics for 50.0.0.10:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss).

C:\Documents and Settings\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Reply from 50.0.0.10: bytes=32 time=2ms TTL=127
 Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
 Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
 Reply from 50.0.0.10: bytes=32 time=1ms TTL=127


Ping statistics for 50.0.0.10:


Packets: Sent = 4, Received = 4, Lost = 0 (0% loss).

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>+

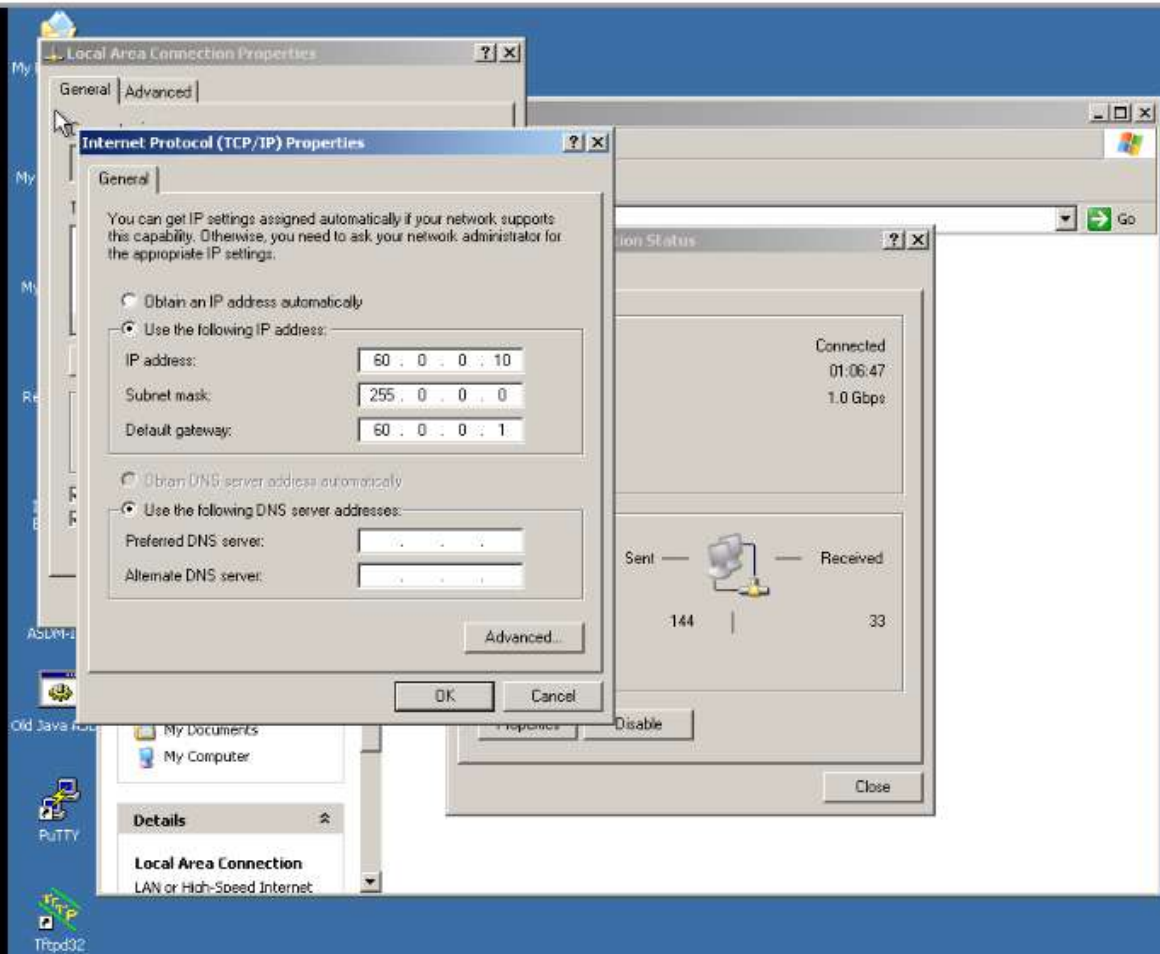

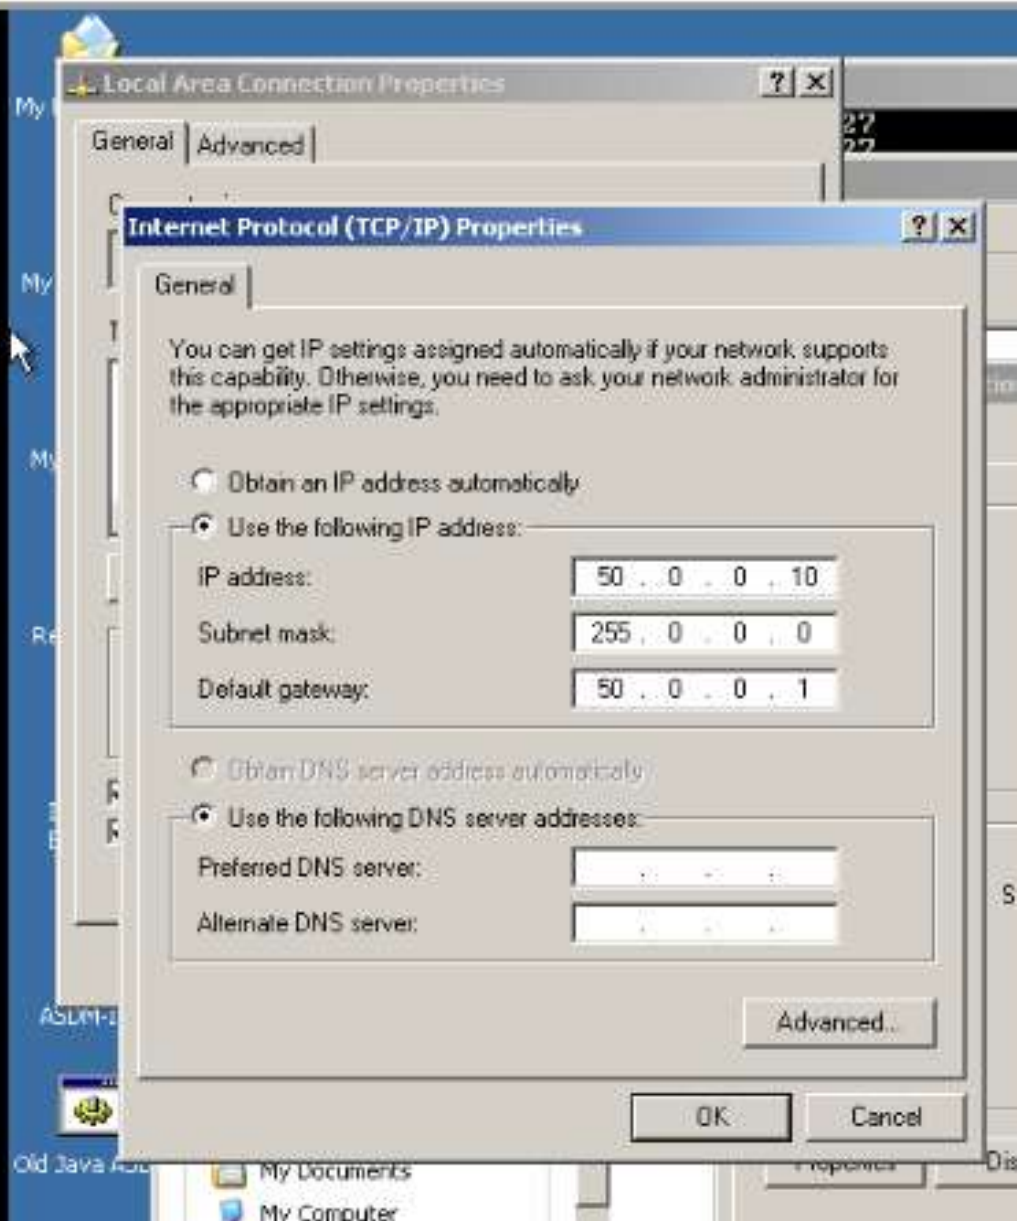

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 50.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:

Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255

Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\user>ping 60.0.0.1

Pinging 60.0.0.1 with 32 bytes of data:

Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.

Ping statistics for 60.0.0.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
=====
Active Routes:
Network Destination        Netmask          Gateway           Interface        Metric
0.0.0.0                    0.0.0.0          50.0.0.10        50.0.0.10        10
50.0.0.10                  255.255.255.255  127.0.0.1        127.0.0.1        10
50.255.255.255             255.255.255.255  50.0.0.10        50.0.0.10        10
127.0.0.0                  255.0.0.0        127.0.0.1        127.0.0.1        1
224.0.0.0                  240.0.0.0        50.0.0.10        50.0.0.10        10
255.255.255.255           255.255.255.255  50.0.0.10        50.0.0.10        1
=====
Persistent Routes:
    None
```



```

C:\WINDOWS\system32\cmd.exe
=====
Persistent Routes:
None

C:\Documents and Settings\user>add route 60.0.0.0 mask 255.0.0.0 50.0.0.1
'add' is not recognized as an internal or external command,
operable program or batch file.

C:\Documents and Settings\user>route add 60.0.0.0 mask 255.0.0.0 50.0.0.1

C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
=====
Active Routes:
Network Destination        Netmask          Gateway          Interface        Metric
50.0.0.0                   255.0.0.0        50.0.0.10       50.0.0.10        10
50.0.0.10                  255.255.255.255  127.0.0.1       127.0.0.1        10
50.255.255.255             255.255.255.255  50.0.0.10       50.0.0.10        10
60.0.0.0                   255.0.0.0        50.0.0.1        50.0.0.10        1
127.0.0.0                  255.0.0.0        127.0.0.1       127.0.0.1        1
224.0.0.0                  240.0.0.0        50.0.0.10       50.0.0.10        10
255.255.255.255           255.255.255.255  50.0.0.10       50.0.0.10        1
=====
Persistent Routes:
None

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>.ping 60.0.0.10
'.ping' is not recognized as an internal or external command,
operable program or batch file.

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

```

```

C:\WINDOWS\system32\cmd.exe
=====
Persistent Routes:
None

C:\Documents and Settings\user>add route 60.0.0.0 mask 255.0.0.0 50.0.0.1
'add' is not recognized as an internal or external command,
operable program or batch file.

C:\Documents and Settings\user>route add 60.0.0.0 mask 255.0.0.0 50.0.0.1

C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ..50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
=====
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
60.0.0.0 255.0.0.0 50.0.0.1 50.0.0.10 1
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1
=====
Persistent Routes:
None

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>.ping 60.0.0.10
'.ping' is not recognized as an internal or external command,
operable program or batch file.

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

```

C:\WINDOWS\system32\cmd.exe

```
Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>.ping 60.0.0.10
'.ping' is not recognized as an internal or external command,
operable program or batch file.

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>route delete 60.0.0.0

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>_
```



```
Router#show ip interface brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	50.0.0.1	YES	manual	up	up
Ethernet0/1	60.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

```
Router#show ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR
```

```
Gateway of last resort is not set
```

```
50.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    50.0.0.0/8 is directly connected, Ethernet0/0
L    50.0.0.1/32 is directly connected, Ethernet0/0
60.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    60.0.0.0/8 is directly connected, Ethernet0/1
L    60.0.0.1/32 is directly connected, Ethernet0/1
```

```
Router#
```