
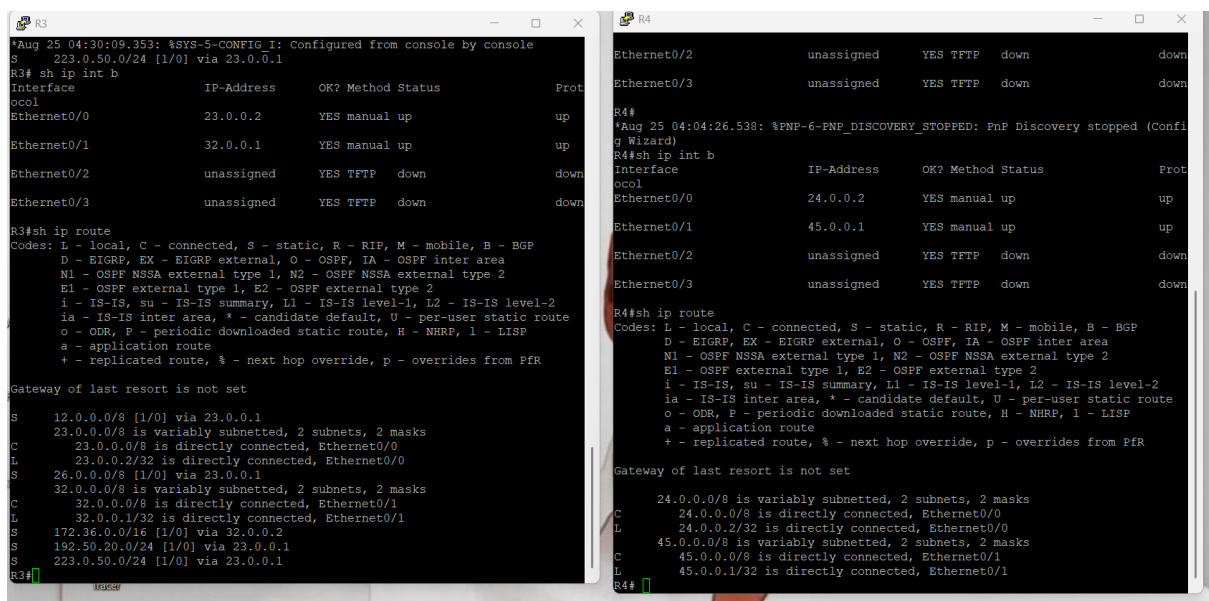
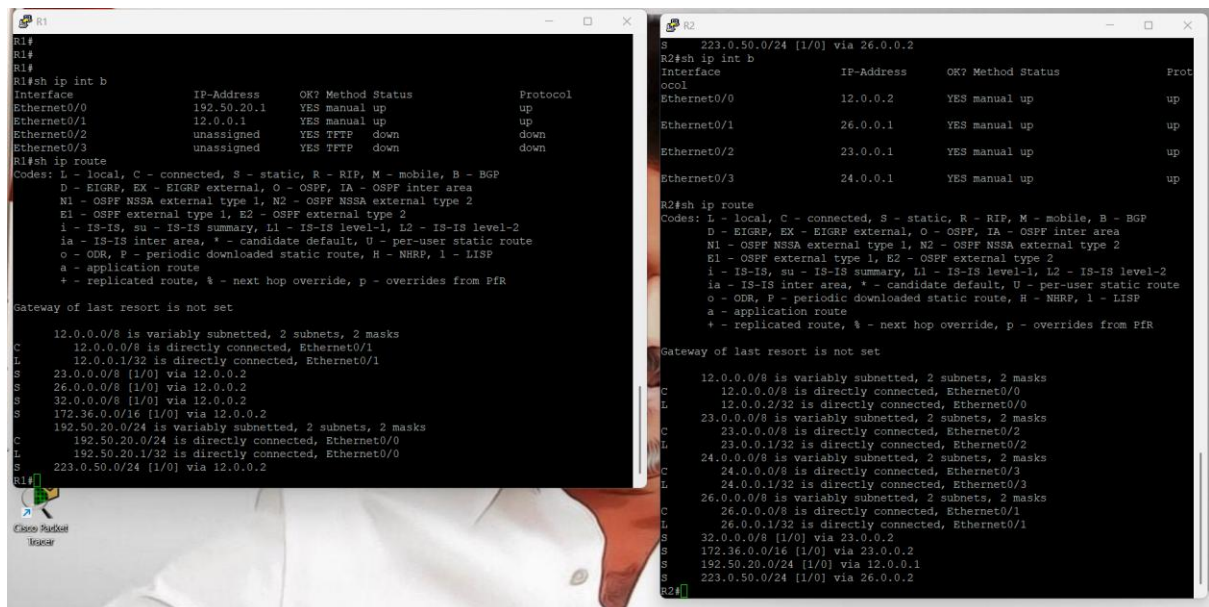


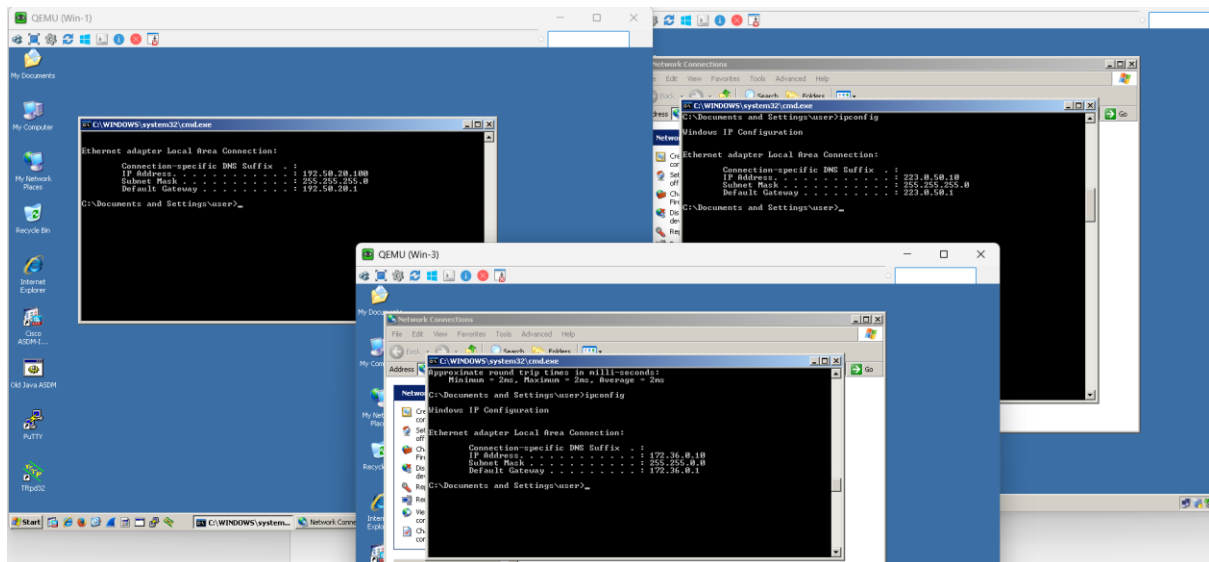

```
R5
Ethernet0/0      172.36.0.1      YES manual up
Ethernet0/1      32.0.0.2      YES manual up
Ethernet0/2      45.0.0.2      YES manual up
Ethernet0/3      unassigned    YES TFTP down

R5#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 32.0.0.1
S 23.0.0.0/8 [1/0] via 32.0.0.1
S 26.0.0.0/8 [1/0] via 32.0.0.1
C 32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 32.0.0.0/8 is directly connected, Ethernet0/1
L 32.0.0.2/32 is directly connected, Ethernet0/1
C 45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 45.0.0.0/8 is directly connected, Ethernet0/2
L 45.0.0.2/32 is directly connected, Ethernet0/2
C 172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
L 172.36.0.0/16 is directly connected, Ethernet0/0
L 172.36.0.1/32 is directly connected, Ethernet0/0
S 192.50.20.0/24 [1/0] via 32.0.0.1
S 223.0.50.0/24 [1/0] via 32.0.0.1
R5#

R6
R6# sh ip int b
Interface      IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0    223.0.50.1      YES manual up      up
Ethernet0/1    26.0.0.2        YES manual up      up
Ethernet0/2    unassigned      YES TFTP down      down
Ethernet0/3    unassigned      YES TFTP down      down

R6#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 26.0.0.1
S 23.0.0.0/8 [1/0] via 26.0.0.1
C 26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 26.0.0.0/8 is directly connected, Ethernet0/1
L 26.0.0.2/32 is directly connected, Ethernet0/1
S 32.0.0.0/8 [1/0] via 26.0.0.1
S 172.36.0.0/16 [1/0] via 26.0.0.1
S 192.50.20.0/24 [1/0] via 26.0.0.1
C 223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
L 223.0.50.0/24 is directly connected, Ethernet0/0
L 223.0.50.1/32 is directly connected, Ethernet0/0
R6#
```

