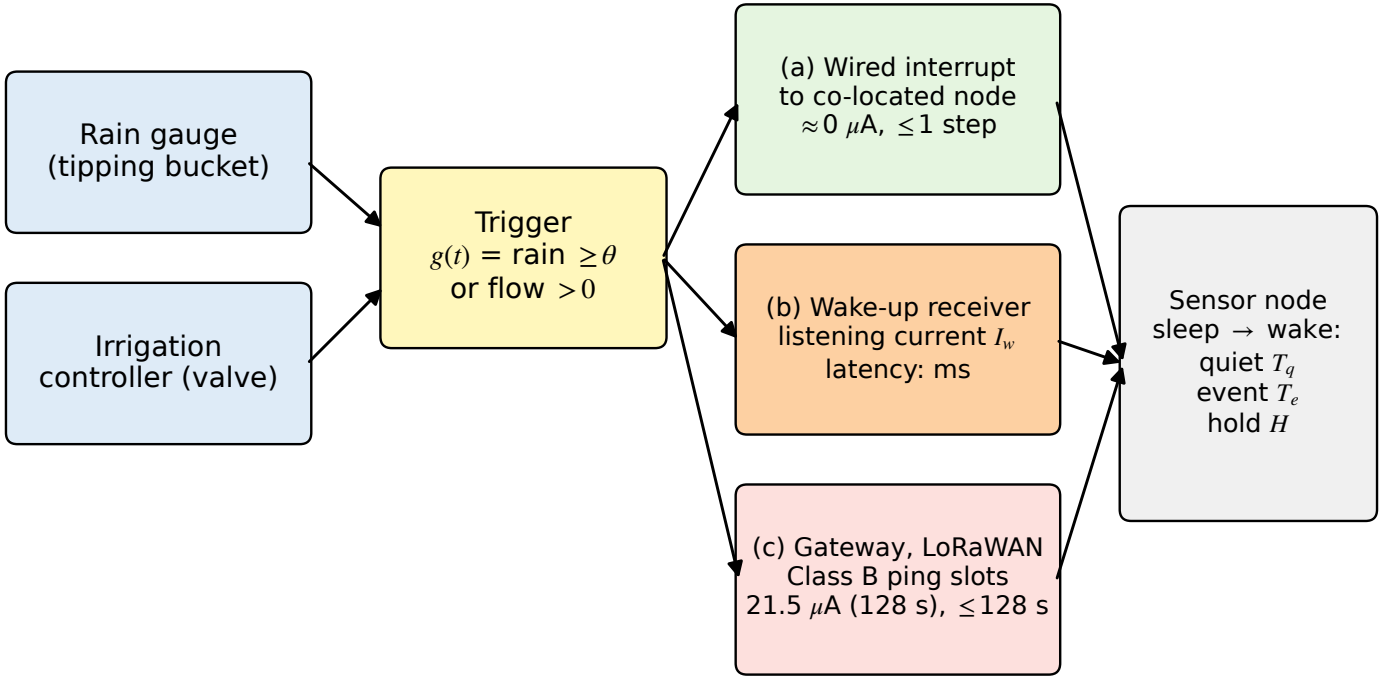

Energy parity with fixed sampling of equal accuracy requires an average trigger current below 0.7 to 2.5 μA (SF7 to SF9): satisfied by (a), by (b) only for sub-μA receivers, never by (c).