

# Terracotta Crochet Clutch

Illustrated pattern based on the supplied video



**F01** | User-selected cover illustration.

A rounded, chunky pouch with a yarn-covered spring frame. The photograph is the appearance reference; it is not a sample made from this pattern.

Primary construction: Katy Handmade, supplied 19:01 video. Original instructions rewritten and count placements clarified. Exact reproduction of the photographed item remains unverified.

# Plan your project

## The construction


Work a three-round oval base, then seven plain single-crochet body rounds. Display the reverse side outside, wrap the spring frame, and attach every opening stitch around its rails. The frame shapes the tapered opening; there are no body decreases, sewn side seams, flap or handle in this version. An earlier PDF using the same terracotta cover photo teaches a rectangular base and centered single crochet. This edition follows the video as requested; the exact photographed construction is not established.

## Measurements and skill

Video checkpoints: foundation 13 ch  $\approx$  16 cm; base  $\approx$  26  $\times$  11 cm; frame nominally 19 cm. Use 14 cm of body-wall height as a provisional target, measured from the base/body transition to the unfinished rim. The transcript also says about 18 cm; neither the reference photo nor the video establishes a reliable final overall height. Intermediate: counting oval increases and fitting hardware require care.

## Materials

Video specification: 500 g lycra T-shirt yarn and a 10 mm hook; choose terracotta for the appearance target. Strip width, fiber percentages, brand and length per ball are unknown. 500 g is the stated supply, not measured consumption or a universal guarantee. Include yarn for wrapping and joining the frame. Also: one 19 cm spring frame, blunt large-eye needle, scissors, tape measure, seven locking markers, smooth scrap ties, and glue suitable for the yarn and metal. The last four items clarify practical requirements; glue is used in the video.

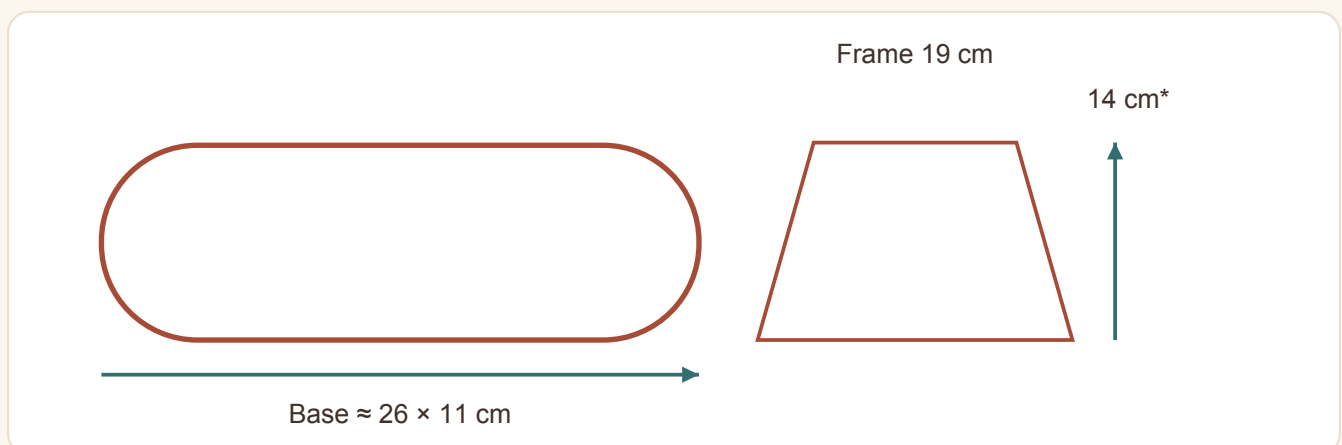

F02 | Measurement schematic, not to scale. Video values; 14 cm wall height provisional.

# Tools and shopping links

## Shopping links for your country


### 10 mm crochet hook

[Shopping links by country](#)



### Blunt large-eye yarn needles

[Shopping links by country](#)

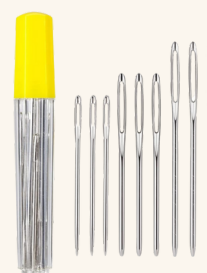

### Spring frame: pattern 19 cm

[Shopping links by country](#)



### Video tutorial

[https://www.youtube.com/watch?v=aE\\_E1EuoGto&t=1s](https://www.youtube.com/watch?v=aE_E1EuoGto&t=1s)

Choose the size and shape to fit your actual bag. The linked frames are 18 cm (US, Canada) and 20 cm (UK and Europe); neither is a confirmed match for the video's 19 cm frame.

Also prepare scissors, tape measure, seven locking markers, smooth scrap ties and glue suitable for yarn and metal. Yarn: 500 g lycra T-shirt yarn as stated in the video; see the materials page.

Each link opens the materials list on [crochetbabygifts.com](https://crochetbabygifts.com), with links for the US, UK, Canada, Germany, France, Italy and Spain. Availability and prices change; check the product before buying.

# Gauge and conventions

## Measure before committing

No measured stitch gauge is supplied. Make a reusable tube: ch 20, sl st in the first ch without twisting; ch 1, 1 sc in every ch (20). Then work six more spiral rounds of 20 sc; mark each round's first stitch. Examine the reverse face. Let the fabric relax flat for 24 hours without stretching or blocking. Count stitches and rounds over 10 cm of one layer, or over 5 cm and double the counts if necessary. Record yarn, hook and both gauges.

## Three fit checks

1. Lay the 13-chain foundation unstretched: aim for the video's 16 cm. 2. After R3, lay the base flat: aim for about 26 × 11 cm without cupping or waves. 3. After B7, temporarily fit the actual frame before cutting or gluing. If any checkpoint fails, change yarn/hook and repeat the sample. Chain gauge does not determine single-crochet gauge; do not convert 13 ch/16 cm into a body gauge.

## Read the pattern

US terms: ch = chain; sc = single crochet; sl st = slip stitch; inc = 2 sc in one stitch; st = stitch; R = base round; B = body round. Work under both top loops unless specified. Rounds are numbered separately for base and body. Right-handed working direction is counterclockwise viewed from above; left-handed makers mirror it. Do not turn between rounds. Setup chains and joining sl sts never count or receive stitches. A numbered placement always refers to the previous round.


## Height assumption

Seven body rounds over a provisional 14 cm imply 5 rounds/10 cm; this is a calculation, not a measured gauge. Use the three fit checks above. Record actual B7 wall height and overall bag height separately. A different yarn can change both proportions and frame fit.

# Learn the stitches

## Chain and single crochet

Make a slip knot; the loop on the hook is not a chain. Yarn over and pull through that loop for each ch. For sc, insert under the two top loops of the indicated stitch, yarn over and pull up a loop (2 loops on hook), yarn over and pull through both (1 loop remains). In the foundation, use one accessible chain loop; leave its opposite free loop for the return pass.



**F03** | Two top strands: work under both for the base and body. Diagram.

## Increase and slip stitch

An inc makes 2 complete sc in one existing stitch: consume 1, produce 2. Mark the first new sc if it starts a round. For sl st, insert into the first sc, yarn over and draw through the stitch and the loop on the hook in one movement. This join adds no counted sc. Start the next base round in the same first sc, not in the join.

Before



After



**F04** | One existing stitch receives two new sc. Diagram; stitch counts only.


## Which face is outside?

The video's texture is ordinary sc with its reverse face outside. This written version uses ordinary untwisted rounds and turns the finished pouch inside out before frame fitting, if needed. Keep the same working face throughout. The V-shaped stitch fronts should end up inside; the horizontal bars/bumps face outside. This handling choice clarifies orientation without changing stitch counts. Do not substitute centered/waistcoat sc or back-loop sc.

# Foundation and base R1

## Foundation


Leave a tail long enough to weave in securely. Ch 13 loosely, about 16 cm. Number chains C1-C13 from the slip-knot end toward the hook. C13 is skipped; C12 is the second chain from the hook. The working loop is not C14. Do not join the foundation into a ring.

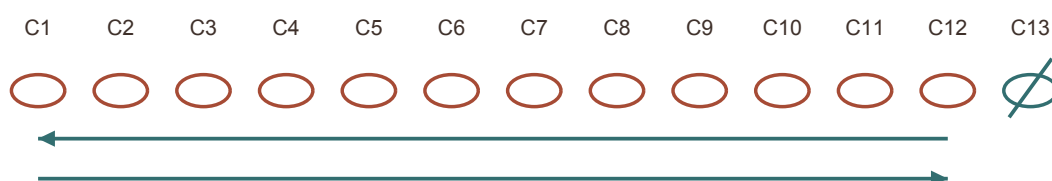

**F05** | 13-chain layout. C13 skipped; arrows follow the two sides. Diagram.

## R1 - around both sides of the chain

1 sc in C12 and mark it as stitch 1. 1 sc in C11-C2 (10 sc). Work 3 sc together in C1. Rotate the chain in the plane of the base; do not flip its working face. Along the unused opposite loops, 1 sc in C2-C11 (10 sc), then 2 sc in C12 alongside the first sc. Join with sl st in marked stitch 1. Total:  $1 + 10 + 3 + 10 + 2 = 26$  sc.

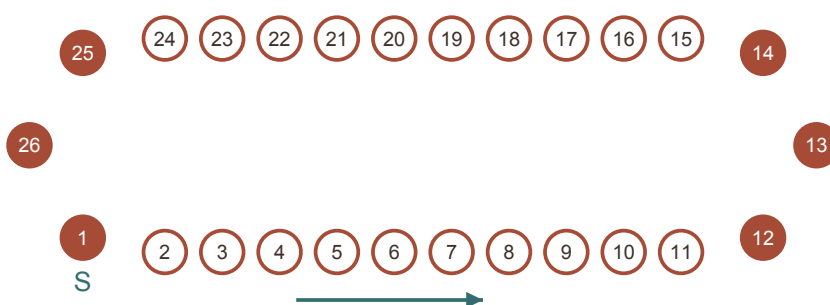

**F06** | R1 result: three stitches at each end, ten on each straight side. Diagram.

## Locate the rounded ends

R1 positions 12, 13 and 14 share C1. Positions 25, 26 and 1 share C12. Mark those six positions; use a distinct marker for stitch 1. There are 10 single stitches on each straight side. The skipped C13, working loop and joining sl st are excluded. Check for a smooth continuous oval before continuing.

# Expand the oval: R2 and R3

## R2 - six increases

Ch 1. Starting in R1 stitch 1, work: inc; 10 sc in stitches 2-11; inc in each of stitches 12-14; 10 sc in stitches 15-24; inc in each of stitches 25-26. Join with sl st in the first new sc. Move the start marker into that first sc and remove all other markers. Consume 26 stitches and produce 32 sc.

## R3 - normalized numbered placement

Ch 1. Work in R2: inc in stitch 1; 1 sc in each of stitches 2-12 (11 sc); [inc, 1 sc] three times over stitches 13-18; 1 sc in each of stitches 19-28 (10 sc); [inc, 1 sc] twice over stitches 29-32. Join with sl st in the first new sc and move the start marker there. Total:  $32 + 6 = 38$  sc. No other markers remain.

## An editorial clarification

The video starts R3 with an inc, alternates inc/sc at the ends, and finishes with one sc. Its relative “second stitch” explanation is not fully reconcilable with the visible round start. The numbered placement above is an internally checked, symmetric proposal preserving six increases; it is not claimed as an exact transcription. It needs a prototype flatness check.

## Base checkpoint

Aim for about  $26 \times 11$  cm, measured relaxed. Both ends should round evenly and the center should lie flat. The difference between a 26 cm base and a 19 cm frame is 7 cm, or 3.5 cm each side when centered; the video’s “3 cm” is approximate. Do not add a back-loop transition round.

R2: 26 → 32

S = 1



R3: 32 → 38

S = 1



Filled dots = increase; open dots = 1 sc; S = start

F07 | R2/R3 input positions: filled numbered dots receive an increase. Editorial diagram.

# Build the body

## B1 - rise without increases

After the R3 join, ch 1. 1 sc in the same first stitch and in each of the remaining 37 stitches, under both top loops. Mark the first new sc. Total 38 sc. Do not turn; do not join the end. This is the first of the seven body rounds, not another base round.

## B2-B7 - continuous spiral

Work 1 sc in every stitch. At the start of each round, remove the marker, work the old marked stitch, and mark the new sc. No setup ch and no sl-st join. B2: 38; B3: 38; B4: 38; B5: 38; B6: 38; B7: 38. Stop after B7 stitch 38, just before the marker. There are 266 body sc in total. No increases, decreases or skipped stitches.

## Check height and texture

After B3, confirm 38 stitches and an even wall; no universal B3 height is established. After B7, record wall height from the base/body transition to the rim; 14 cm is provisional. The source transcript's 18 cm is unresolved. Do not silently add rounds to force a number. Display the reverse face outside, then trial-fit the frame. If you deliberately change height, add or remove complete 38-stitch rounds and record the altered round count; this is a customization.



**F08** | Video, about 08:35: completed oval base. Magenta yarn is the source sample.




**F09** | Video, about 11:32: body in ordinary sc, reverse face displayed outside.

# Finish the body and wrap the frame

## Needle finish - an explicit draft method

Trial-fit first (next page). Then cut the body yarn with a weaving tail and pull the tail through the last loop. Thread the needle under both top loops of the marked first sc of B7. Return into the top of the last sc, beside the tail exit, to imitate a connecting V. Adjust to the same size as its neighbors. This bridge is a finish, not stitch 39. The video shows a needle finish, but this precise return path is editorial and needs sample review. Remove the marker; weave the tail securely on the future inside.

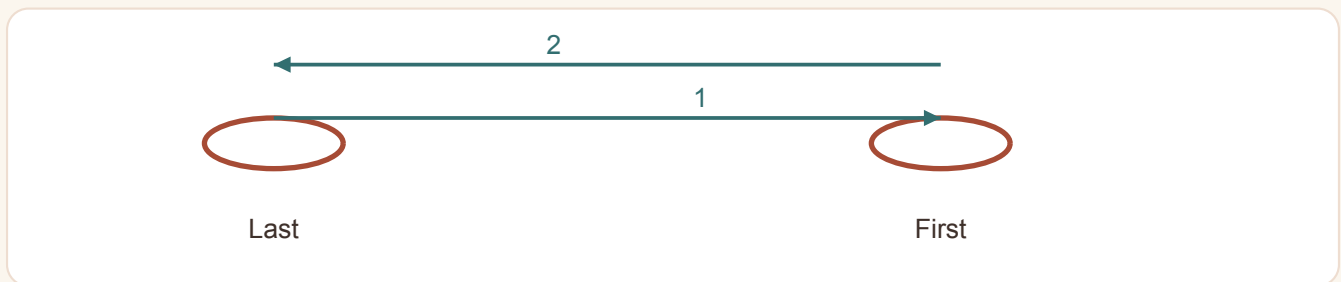

**F10** | Needle finish schematic: first stitch and last stitch are connected; no new sc.

## Turn and prepare

If the reverse bars are not already outside, turn the pouch inside out once. No new stitches are made. Test the bare spring frame open and closed. Measure its actual inner span; the video reports 16 cm for a nominal 19 cm frame and warns that the loose frame visible earlier is smaller than the project frame.

## Cover the two rails

Prepare two lengths of yarn; their exact lengths are not specified. Trial-wrap each rail first to determine what it needs. Secure one end near a hinge with a small amount of suitable glue on the fixed rail; wrap evenly with adjacent turns, and secure the other end. Repeat for the second rail. Leave screws, moving springs and hinge gaps uncovered. Allow the glue to cure according to its label. Open and close the frame again before attaching it.




**F11** | Video, about 14:16: wrapping a fixed rail; moving parts stay clear.

# Center the frame

## Mark two equal halves

With the reverse face outside, flatten the opening so the oval base's short ends sit at the two sides. Find two opposing gaps at the short-end centers, 19 stitches apart, and label them H1 and H2 with scrap ties. Re-number the opening for assembly only: A1 immediately after H1, A1-A19 along the first rail, A20-A38 along the second; H2 is between A19/A20 and H1 between A38/A1. This 19/19 allocation is a calculated fitting proposal, not a count spoken in the video.

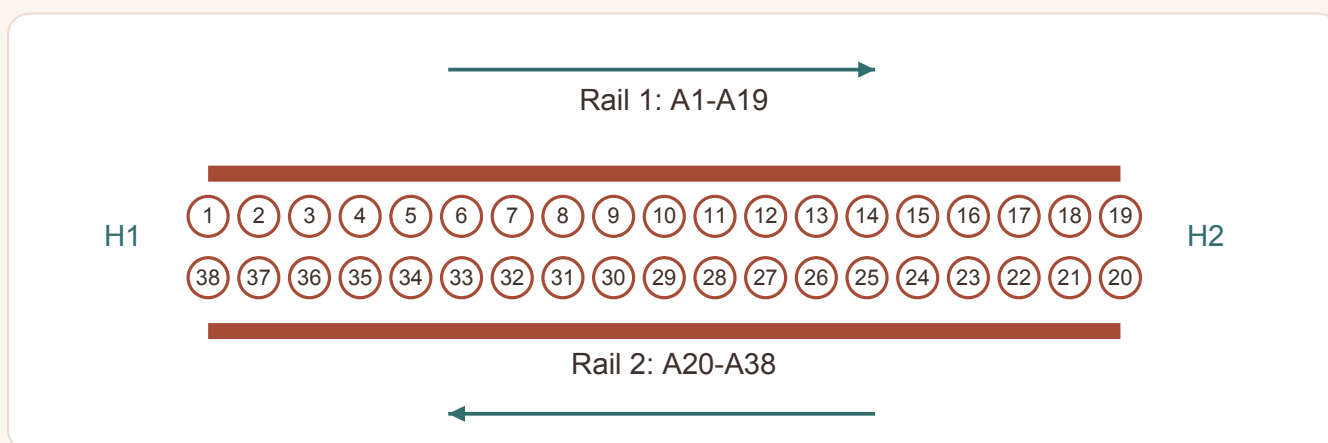

**F12** | Opening re-indexed for assembly: 19 stitches per rail; hinge gaps H1/H2. Diagram.

## Tie and distribute

Open the frame and align its hinges with H1/H2. Tie at both hinges and at each rail's center; add temporary ties if needed. Spread the 19 stitches of each half evenly along its rail, including its curves. Match corresponding front/back points. Center the frame over the base; avoid stretching the edge to disguise a mismatch. There is no separate handle opening.

## Mandatory fit checkpoint

Close and reopen the tied frame several times. The fabric may gather slightly, but it must not twist, block the springs, or pull the hinges out of alignment. Confirm equal stitch counts on both rails and clearance at both hinges. Rail geometry and relaxed stitch width are unknown; 38 stitches alone cannot prove fit. If it fails, stop and reassess yarn, hook and frame. Keep ties in place during attachment.



**F13** | Video, about 15:08: spring frame tied to the opening before attachment.

# Attach the frame

## Attachment stitch

Use new yarn and a slip knot on the hook. Work from the outside of the pouch. Start at A1 immediately after H1. Catch only the top strand of A1 closest to the bag's exterior, pass the hook beneath the adjacent wrapped rail toward the interior, yarn over and draw a loop back through the body strand (2 loops). Yarn over above the rail and pull through both loops, enclosing the rail. Complete one such sc per body stitch. The unused inner top strand stays free; do not crochet into the rail wrapping.

## First rail, hinge, second rail

Work A1-A19: 19 attachment sc. Make 1 very loose ch over H2; consume no body stitch. Continue directly in A20 and work through A38: another 19 attachment sc. Make 1 very loose ch over H1. No stitches are skipped at either hinge. Total: 38 attachment sc + 2 separate ch-1 bridges. Mark the first attachment sc; remove ties only as you reach them. This fully numbered allocation is editorial; the video supplies the outer-loop method and loose hinge bridges.

## Close and secure

Test frame movement before cutting. Adjust the two bridge chains so the hinges move freely. Cut with a tail and pull it through the last chain loop. Pass the needle under both loops of the first attachment sc, then back through the last chain at the tail exit to form a neat connecting loop. Do not add a duplicate sc at A1. This finishing path is a draft clarification. Hide ends on the inside, change direction when weaving, and remove all temporary ties. Recount and test again.



**F14** | Video, about 15:47: hook catches the exterior top strand to join the rail.



**F15** | Video, about 16:52: loose chain crosses the hinge; the next body stitch is used.

# Final checks, care and adjustments

## Check the finished result

Confirm: base 26 → 32 → 38; B1-B7 each 38; reverse texture outside; assembly 19 + 19 sc; two loose hinge chains; every opening stitch used once; hardware moves freely; no exposed tails. Compare the silhouette and texture with F01. Absolute photo dimensions, exact stitch identity and load behavior remain unverified. The source clutch is completed in the video. The written clarifications require separate sample verification.

## Troubleshooting

Base cups or ripples: re-count the six increases, then compare yarn and tension; do not change counts casually. Wall flares: check that join chains were not crocheted into. Texture looks like vertical Vs: inspect the reverse face before frame attachment. Frame jams: undo the nearby join and loosen its bridge; keep yarn/glue out of moving parts. Crowded or stretched rim: revisit the three fit checks before fastening permanently.

## Customize and care

For another foundation of  $n$  chains, the same three-round arithmetic gives  $R1 = 2n$ ,  $R2 = 2n + 6$ ,  $R3 = 2n + 12$ ; placement and hardware fit must be re-drafted. Do not scale the 500 g supply by width alone. Optional lining is not taught in the source: use the actual finished interior as a template and keep stitching below the frame, leaving hinge clearance. Follow the yarn and glue labels; until known, spot-clean gently, support the shape and dry flat. Test any cleaning method on a swatch.

## Source and next validation

Optional tutorial: Katy Handmade video. Magenta process images are actual video captures; terracotta F01 is the supplied reference. Diagrams are original instructional schematics, not photographs or test evidence. Next: crochet a prototype, record gauge, B7 height and yarn consumed, review R3 and needle paths, fit the actual frame, and photograph the finished result. Branding and support contact were not supplied.



**F16** | Video, about 18:00: finished source clutch. Not a prototype of this written pattern.