

Stirnräder aus Polyacetal (POM)


Modul 2,0

Ausführung: geradverzahnt, gespritzt, Eingriffswinkel 20°, Bohrung spanabhebend bearbeitet.
Maßänderung vorbehalten.



Abbildung beispielhaft

| ZZ | ZB [mm] | ØB [mm] | ØTK [mm] | ØKK [mm] | ØN [mm] | L [mm] | ØFM [mm] | WS [mm] | G [g] | DM** [Ncm] | Art.-Nr. |
|-----|------------|------------|-------------|-------------|------------|-----------|-------------|------------|----------|---------------|-----------|
| 12 | 15 | 8 | 24 | 28 | 18,5 | 27 | 16* | 13,5 | 11,74 | 113,1 | SH2012HF |
| 13 | 15 | 8 | 26 | 30 | 18,5 | 27 | 18,5* | 13,5 | 12,88 | 122,52 | SH2013HF |
| 14 | 15 | 8 | 28 | 32 | 18,5 | 27 | 18,5* | 13,5 | 14,98 | 131,95 | SH2014HF |
| 15 | 15 | 8 | 30 | 34 | 18,5 | 27 | 22* | 12 | 15,89 | 141,37 | SH2015HF |
| 16 | 15 | 8 | 32 | 36 | 17,5 | 27 | 22 | 6 | 16,68 | 150,8 | SH2016HF |
| 17 | 15 | 8 | 34 | 38 | 17,5 | 27 | 24 | 6 | 17,65 | 160,22 | SH2017HF |
| 18 | 15 | 8 | 36 | 40 | 17,5 | 27 | 25 | 6 | 19,44 | 169,65 | SH2018HF |
| 19 | 15 | 8 | 38 | 42 | 17,5 | 27 | 27 | 6 | 20,84 | 179,07 | SH2019HF |
| 20 | 15 | 10 | 40 | 44 | 20 | 27 | 28 | 6 | 24,59 | 188,5 | SH2020HF |
| 21 | 15 | 10 | 42 | 46 | 20 | 27 | 28 | 6 | 27,01 | 197,92 | SH2021HF |
| 22 | 15 | 10 | 44 | 48 | 20 | 27 | 28 | 6 | 30,28 | 207,35 | SH2022HF |
| 23 | 15 | 10 | 46 | 50 | 24 | 27 | 35 | 6 | 32,58 | 216,77 | SH2023HF |
| 24 | 15 | 10 | 48 | 52 | 24 | 27 | 35 | 6 | 35,4 | 226,19 | SH2024HF |
| 25 | 15 | 10 | 50 | 54 | 24 | 27 | 35 | 6 | 39,24 | 235,62 | SH2025HF |
| 26 | 15 | 10 | 52 | 56 | 24 | 27 | 38,5 | 6 | 39,28 | 245,04 | SH2026HF |
| 27 | 15 | 10 | 54 | 58 | 24 | 27 | 38,5 | 6 | 42,71 | 254,47 | SH2027HF |
| 28 | 15 | 10 | 56 | 60 | 24 | 27 | 38,5 | 6 | 46,47 | 263,89 | SH2028HF |
| 30 | 15 | 10 | 60 | 64 | 24 | 27 | 43,5 | 6 | 50,06 | 282,74 | SH2030HF |
| 32 | 15 | 10 | 64 | 68 | 26 | 27 | 44 | 6 | 59,73 | 301,59 | SH2032HF |
| 35 | 15 | 12 | 70 | 74 | 26 | 27 | 54 | 6 | 61,66 | 329,87 | SH2035HF |
| 36 | 15 | 12 | 72 | 76 | 26 | 27 | 54 | 6 | 65,47 | 339,29 | SH2036HF |
| 38 | 15 | 12 | 76 | 80 | 26 | 27 | 61,5 | 6 | 66,51 | 358,14 | SH2038HF |
| 40 | 15 | 12 | 80 | 84 | 26 | 27 | 61,5 | 6 | 77,4 | 376,99 | SH2040HF |
| 42 | 15 | 12 | 84 | 88 | 26 | 27 | 61,5 | 6 | 87 | 395,84 | SH2042HF |
| 45 | 15 | 14 | 90 | 94 | 30 | 27 | 68 | 6 | 99,09 | 424,12 | SH2045HF |
| 48 | 15 | 14 | 96 | 100 | 30 | 27 | 74 | 6 | 108,91 | 452,39 | SH2048HF |
| 50 | 15 | 14 | 100 | 104 | 30 | 27 | 78 | 6 | 116,29 | 471,24 | SH2050HF |
| 55 | 15 | 14 | 110 | 114 | 30 | 27 | 87,5 | 6 | 133,84 | 518,36 | SH2055HF |
| 60 | 15 | 14 | 120 | 124 | 30 | 27 | 97,5 | 6 | 154,62 | 565,49 | SH2060HF |
| 70 | 15 | 14 | 140 | 144 | 30 | 27 | 117 | 6 | 196,02 | 659,73 | SH2070HF |
| 75 | 19 | 20 | 150 | 154 | 40 | 34 | 133 | 8 | 285,2 | 895,35 | SH2075HF |
| 80 | 19 | 20 | 160 | 164 | 40 | 34 | 133 | 8 | 344,1 | 955,04 | SH2080HF |
| 85 | 19 | 20 | 170 | 174 | 40 | 34 | 148 | 8 | 370,2 | 1014,73 | SH2085HF |
| 90 | 19 | 20 | 180 | 184 | 40 | 34 | 163 | 8 | 388,5 | 1074,42 | SH2090HF |
| 95 | 19 | 20 | 190 | 194 | 40 | 34 | 163 | 8 | 464 | 1134,11 | SH2095HF |
| 100 | 19 | 20 | 200 | 204 | 40 | 34 | 178 | 8 | 478,6 | 1193,81 | SH20100HF |
| 110 | 19 | 20 | 220 | 224 | 40 | 34 | 193 | 8 | 580,6 | 1313,19 | SH20110HF |

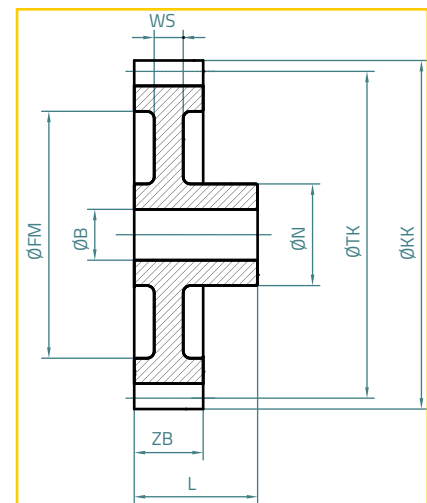

*) Freimaß nur auf Anguss-Seite

**) Bitte Angaben zu Drehmoment auf S. 30 beachten.