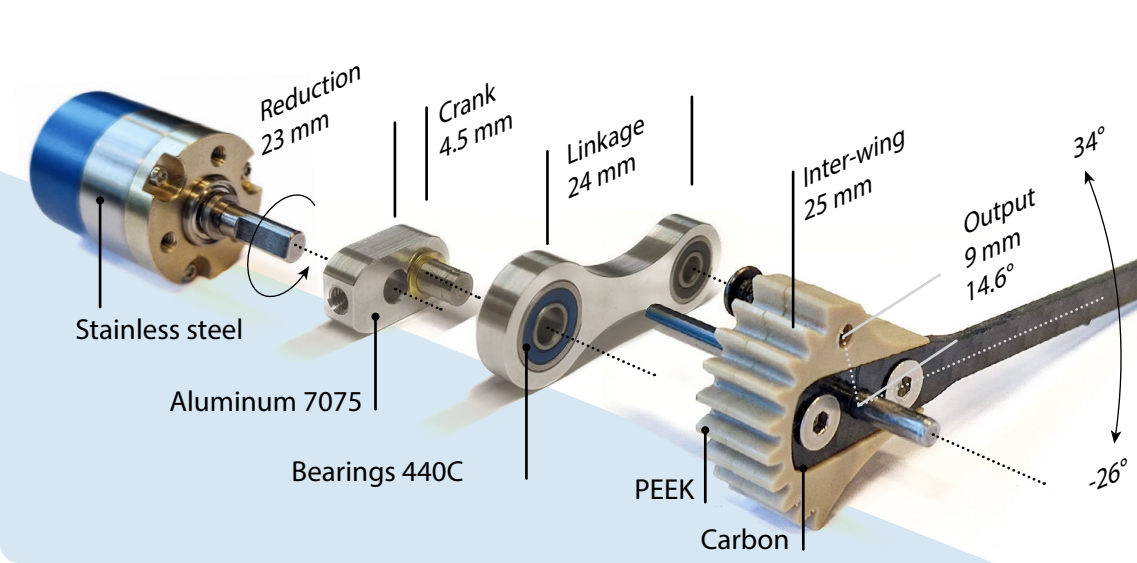

Reduction
23 mm
Crank
4.5 mm
Linkage
24 mm
Inter-wing
25 mm
Output
9 mm
14.6°
34°
-26°
Stainless steel
Aluminum 7075
Bearings 440C
PEEK
Carbon