

Ryder Want and Raphael Lemus

Deliverable 1
https://tufts.box.com/s/rbogelysnudoeoskpdhbuhg1zsrv8uxa

Deliverable 2
Velocity X

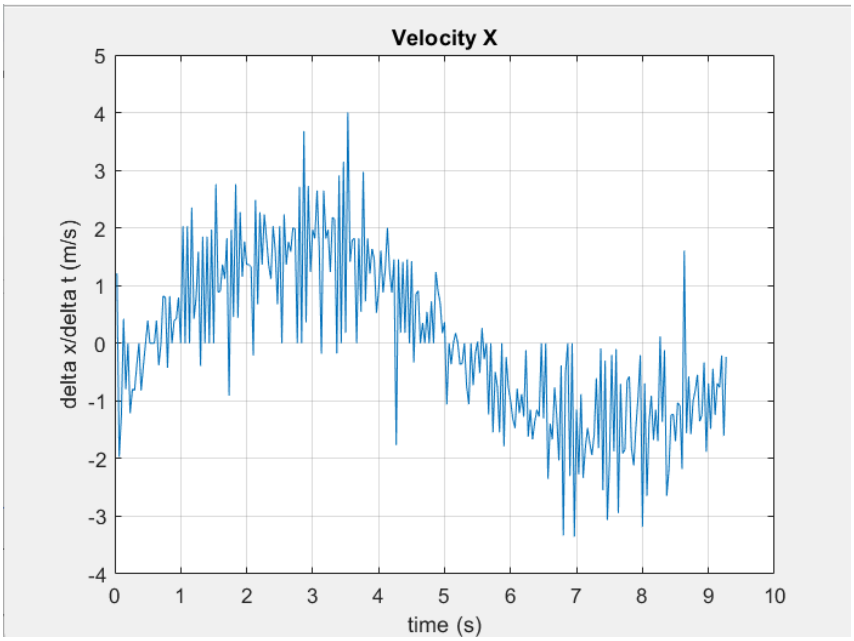


Part C

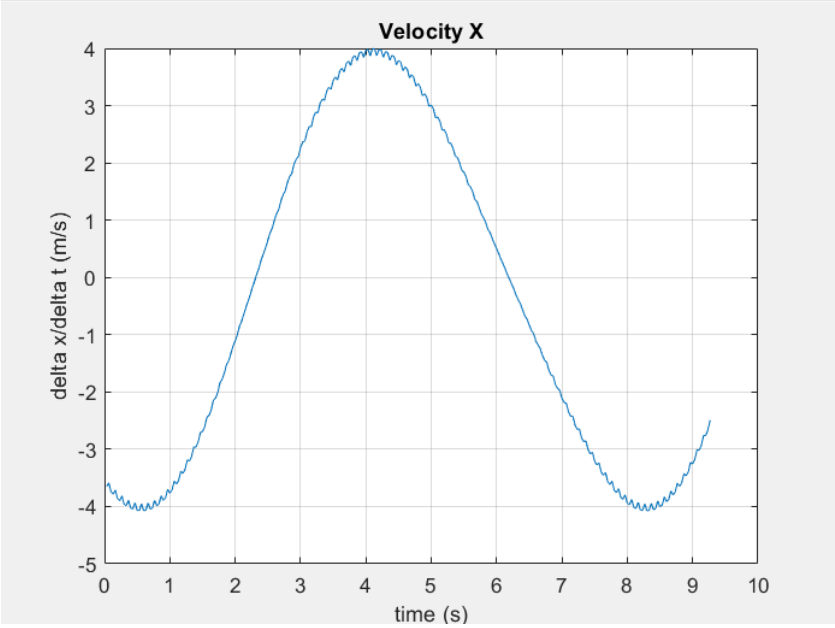


Part D

Velocity Y

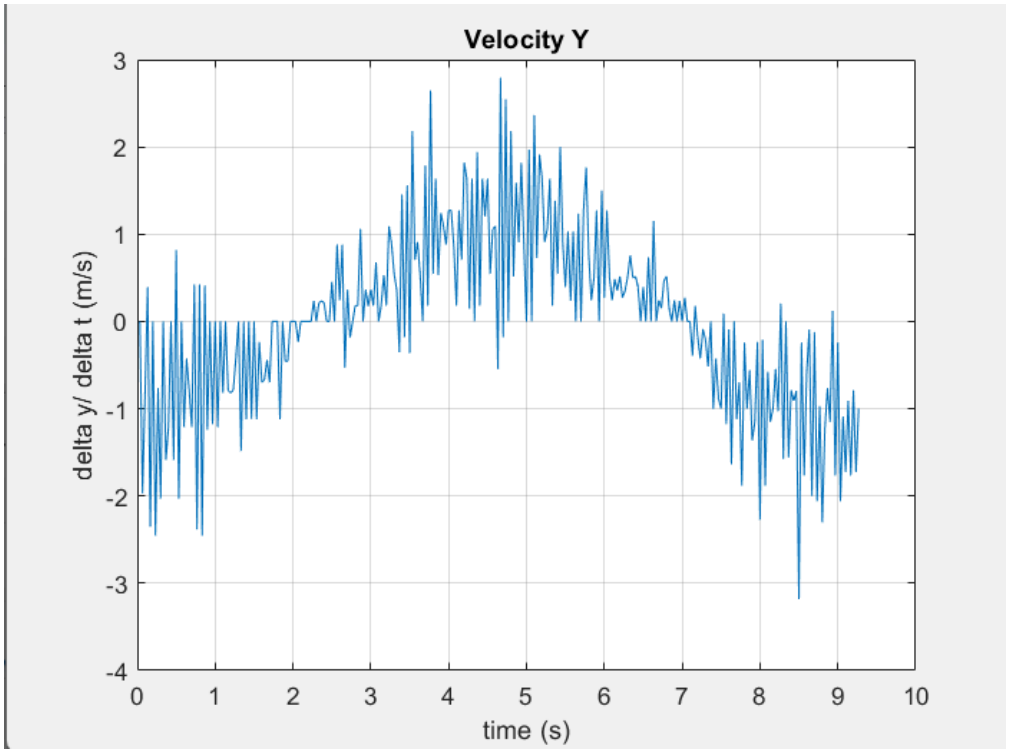


Part C

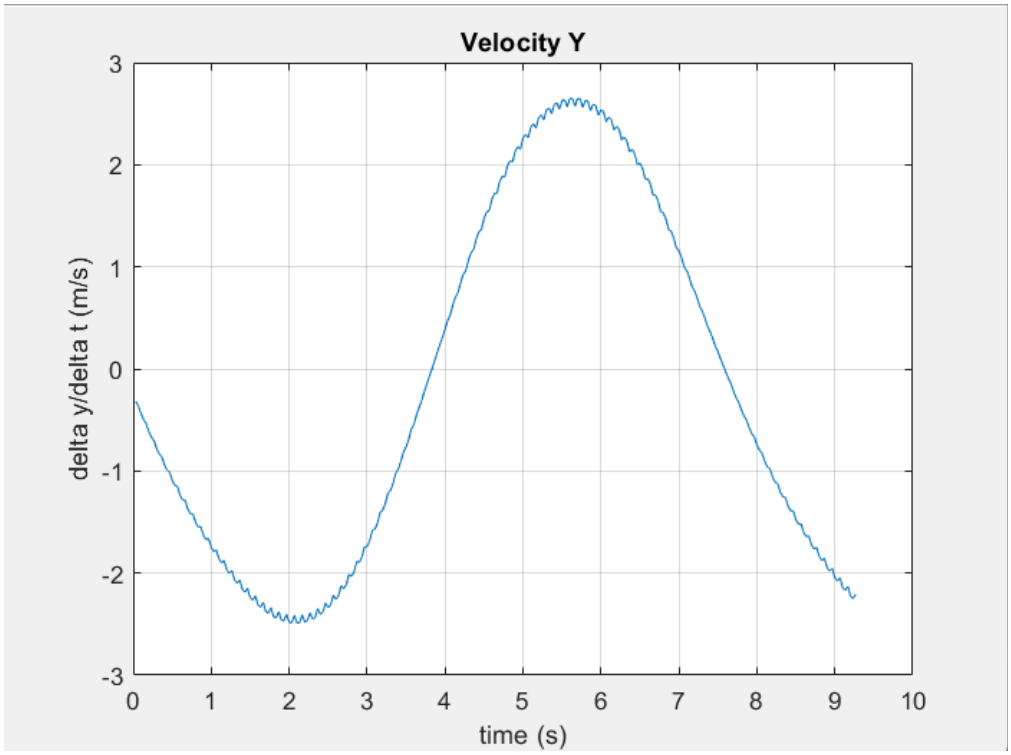


Part D

Trace Path Mechanism

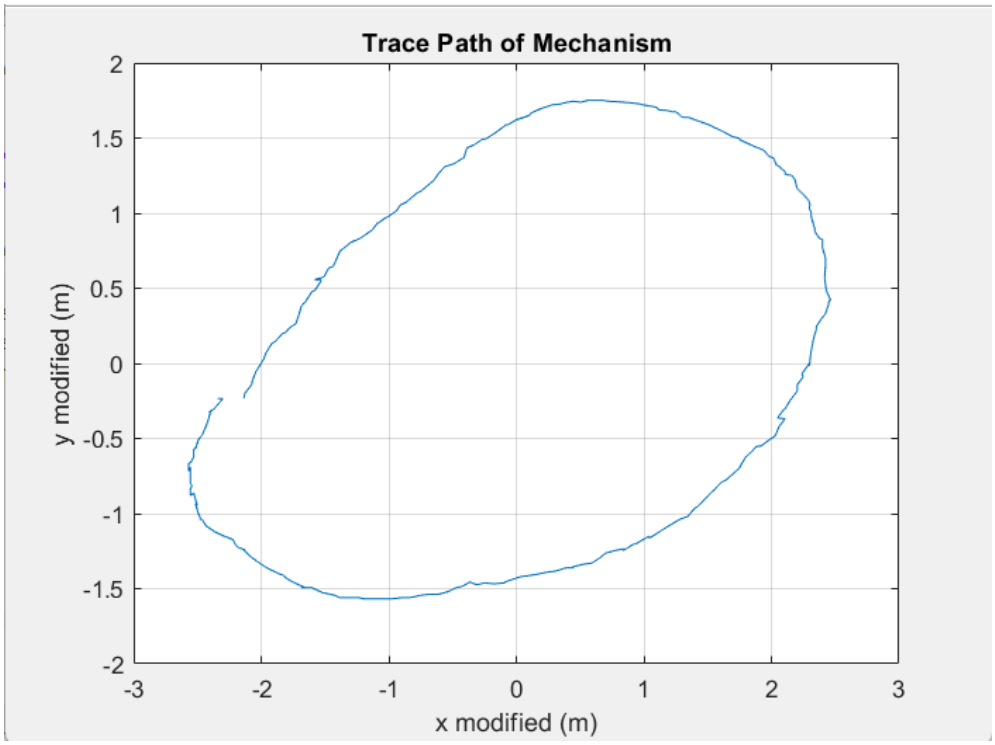

Part C

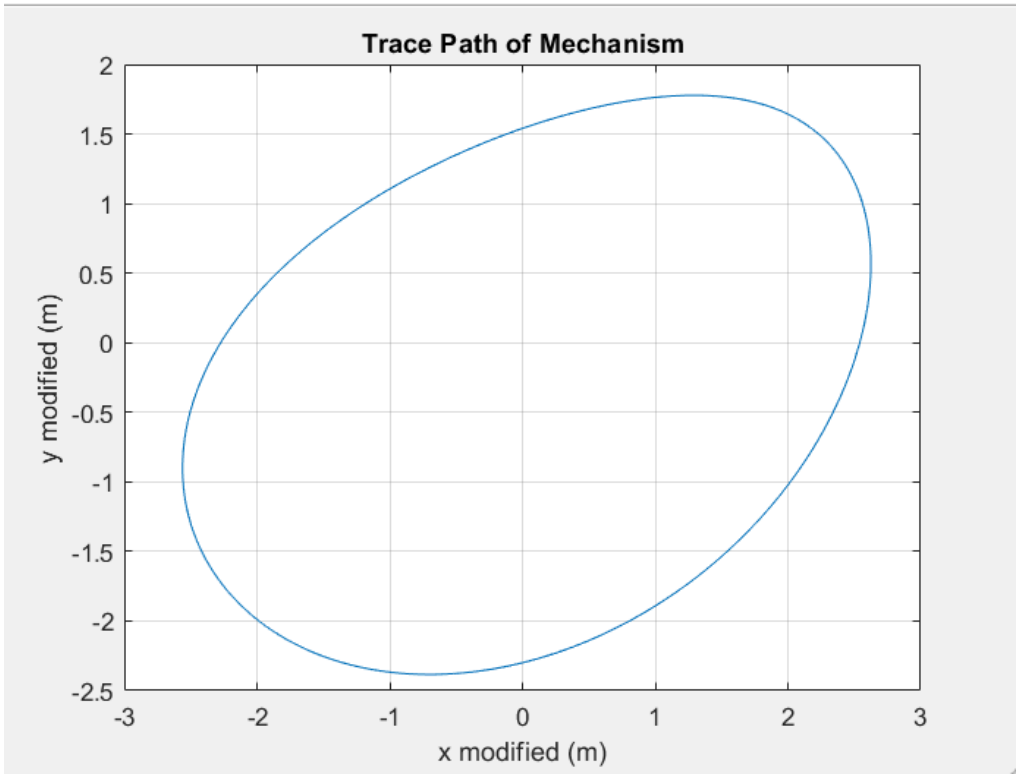

Part D

Deliverable 3

When comparing the graphs, one thing stands out: the amount of noise in the graphs from part C. The noise comes from how zoomed out the camera was. The tracker tracks differently in each frame, predicting the lines between the two points. Therefore, there is noise. However, in part D, the SolidWorks has a smooth line with some noise, yet it is negligible due to the small amount of noise. Also, the trace path from part C is not as accurate as in SolidWorks because there might have been some error for the tracker. The tracker did not capture how the bottom half was supposed to move. This could also be seen with the small gap at -0.5 m for the y modified. However, in a perfect world, SolidWorks gives an ideal connected oval. Therefore, the difference between the tracker and the SolidWorks is that the tracker could be inconsistent, meaning it does not capture the full range of motion the device could have. Furthermore, regardless of the noise, both systems follow the same general motion.