




ESP32 Processor and beacon listener

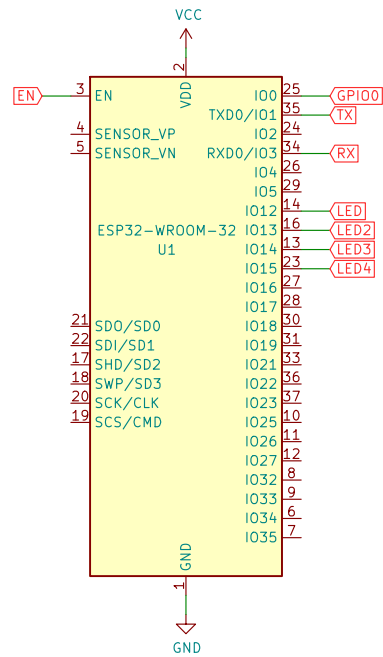


Filtering, Enabling the uP and main power supply

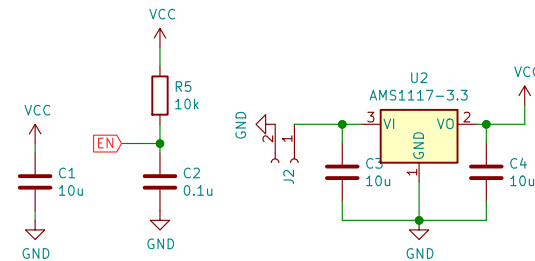

Output status indicators

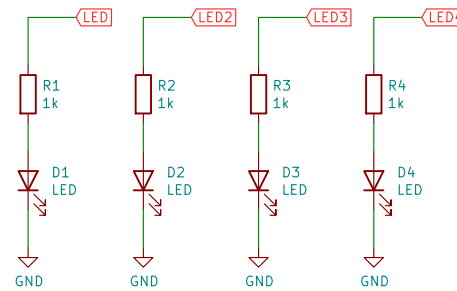

Programming header



Rubén Arce

Sheet: /
File: ESP_test.sch

Title: BLE Beacon Mode node

Size: A4 Date: 2020-10-27

KiCad E.D.A. kicad (5.1.6)-1

Rev: v0.2

Id: 1/1