1 Introduction

TBD

2 Equations of Motion

2.1 Analytical Derivation

Consider a ball of radius R and mass M rolling without slipping on a plane

$$H := \{(x, y, z) \in \mathbb{R}^3 \mid F := z - \alpha y = 0\} \subseteq \mathbb{R}^3 \tag{1}$$

with unit normal field $\boldsymbol{n} := \frac{\operatorname{grad} F}{\|\operatorname{grad} F\|}$. Additionally, assume that the sphere carries a dipole moment $\boldsymbol{\mu}_0$ interacting with a homogeneous, constant magnetic field $\boldsymbol{B}$. The configuration manifold is

$$Q := H \times \mathrm{SO}(3) \subseteq \mathbb{R}^3 \times \mathrm{SO}(3),$$

and the velocity phase space is therefore given by

$$TQ = TH \times T\,\mathrm{SO}(3) \cong TH \times \mathfrak{so}(3) \cong \mathbb{R}^2 \times \mathbb{R}^3 \subseteq \mathbb{R}^6.$$

We choose the trivial global chart on $\mathbb{R}^3$ and some local smooth chart $\phi : U \subseteq \mathrm{SO}(3) \to \mathbb{R}^3$ on $\mathrm{SO}(3)$.[1] A motion is a function

$$(\boldsymbol{r}(t), P(t)) : \mathbb{R} \supseteq I \to \mathbb{R}^3 \times \mathrm{SO}(3).$$

In local coordinates, define $\boldsymbol{\theta} := \phi \circ P : I \to \mathbb{R}^3$. Our goal is to find equations of motion and their solutions

$$(\boldsymbol{r}(t), \boldsymbol{\theta}(t)) = (x(t), y(t), z(t), \theta_x(t), \theta_y(t), \theta_z(t)) : I \to \mathbb{R}^6$$

in local coordinates. Using the canonical Euclidean basis $\mathcal{B} := (\boldsymbol{e}_x, \boldsymbol{e}_y, \boldsymbol{e}_z)$, we define a non-moving (inertial) coordinate frame by choosing an arbitrary origin. Furthermore, we consider a rotating coodinate frame defined by $\hat{\mathcal{B}}(t) := P(t)\mathcal{B}$. The angular velocity in the inertial frame $\boldsymbol{\Omega}(t) = (\Omega_x, \Omega_y, \Omega_z)^\top$ is defined in terms of the cross product matrix

$$\Omega^\times = \dot{P}P^\top = \begin{pmatrix} 0 & -\Omega_z & \Omega_y \\ \Omega_z & 0 & -\Omega_x \\ -\Omega_y & \Omega_x & 0 \end{pmatrix}.$$

[1] Constraining the motion to H reduces the system by one dimension, but we chose not to eliminate z since we need the solution in the full frame for numerical analysis.

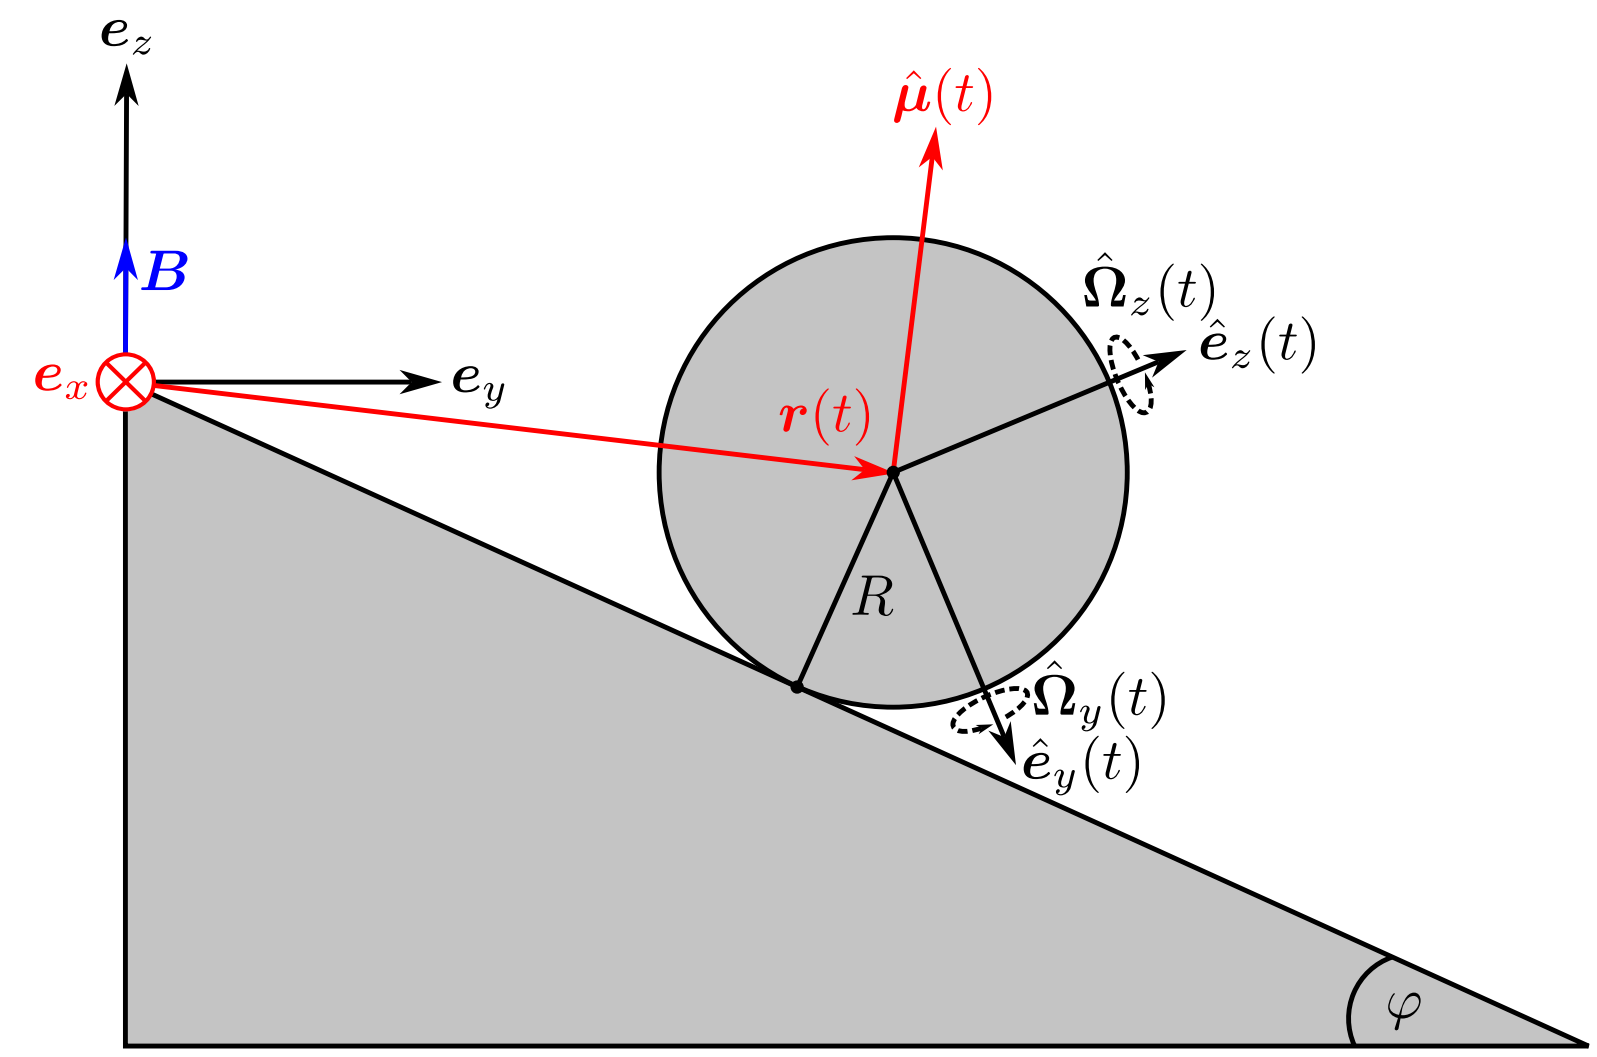

Figure 1: Sketch of the system in the yz-plane. The hat vectors are vectors of the basis $\hat{\mathcal{B}}$ while vectors without hat refer to $\mathcal{B}$. Red vectors are projected and may have non-zero $\boldsymbol{e}_x$-components. The hyperplane has an angle of inclination φ defined by $\alpha = \tan\varphi$. The outer magnetic field is kept fixed parallel to $\boldsymbol{e}_z$.

The kinetic energy form is given by

$$T(\boldsymbol{r}, \boldsymbol{\Omega}) = \frac{M}{2}\|\dot{\boldsymbol{r}}\|^2 + \frac{I_0}{2}\|\boldsymbol{\Omega}\|^2 \tag{2}$$

and the potential by

$$U(z, \boldsymbol{\Omega}) = -Mgz + \langle \hat{\boldsymbol{\mu}}(t), \boldsymbol{B} \rangle, \tag{3}$$

where $\hat{\boldsymbol{\mu}}(t) := P(t)\boldsymbol{\mu}_0$, I_0 is the inertia scalar of an ideal ball, and g is the gravitational acceleration. We obtain a Lagrangian $L(z, \boldsymbol{\Omega}, \dot{\boldsymbol{r}}) := T - U$. Assuming that there is an external force $\boldsymbol{F}_\mathrm{e} = \boldsymbol{F}_\mathrm{e}(\boldsymbol{r})$ such as friction, the corresponding Lagrange-d'Alembert principle reads

$$\delta \int_0^t L(z(s), \boldsymbol{\Omega}(s), \dot{\boldsymbol{r}}(s))\, ds + \int_0^t \langle \boldsymbol{F}_\mathrm{e}(\boldsymbol{r}(s)), \delta\boldsymbol{r}(s) \rangle\, ds = 0. \tag{4}$$

The torque can be written as

$$\boldsymbol{\tau} = \boldsymbol{\tau}_\mathrm{em} + \boldsymbol{\tau}_\mathrm{e}$$

where $\boldsymbol{\tau}_{\mathrm{em}} := \hat{\boldsymbol{\mu}}(t) \times \boldsymbol{B}$ is the magnetic torque, and $\boldsymbol{\tau}_{\mathrm{e}} := -R\boldsymbol{n} \times \boldsymbol{F}_{\mathrm{e}}$ is the torque induced by external forces.[1][2] The phase space of the linear motion admits an orthogonal decomposition $\mathbb{R}^3 \cong H \oplus H^{\perp}$. Thus we can decompose arbitrary $\boldsymbol{v} \in \mathbb{R}^3$ as $\boldsymbol{v} = \boldsymbol{v}_{\parallel} + v_{\perp}\boldsymbol{n}$. With the rolling constraint

$$\dot{\boldsymbol{r}} = R\boldsymbol{\Omega} \times \boldsymbol{n}, \tag{5}$$

integration by parts, and non-degeneracy of the scalar product, one obtains tangential

$$\frac{d\boldsymbol{\Omega}_{\parallel}}{dt} = \frac{1}{I_0 + MR^2}\boldsymbol{\tau}_{\parallel} - \frac{RMg}{I_0 + MR^2}(\boldsymbol{n} \times \boldsymbol{e}_z) \tag{6}$$

and normal

$$\frac{d\Omega_{\perp}}{dt} = \frac{\tau_{\perp}}{I_0} \tag{7}$$

equations for the angular acceleration from Equation 4. Taking the derivative of Equation 5, this fully determines the linear motion. Assuming Coulomb friction[3][4] and aerodynamical drag by the drag equation, the external force becomes

$$\boldsymbol{F}_{\mathrm{e}} = -\nu_{\mathrm{r}} Mg\langle \boldsymbol{n}, \boldsymbol{e}_z \rangle \operatorname{sgn}(\dot{\boldsymbol{r}}) + \frac{\rho C A}{2}\|\dot{\boldsymbol{r}}\|^2, \tag{8}$$

where ν_{r} is the rolling resistance coefficient, sgn is the sign function, ρ is the fluid density of air, C is the drag coefficient, and A is the cross-sectional area of the sphere.[3][4][5] For numerical reasons, we reparametrize $P(t) = P((q_0(t), \boldsymbol{q}(t)))$, where

$$(q_0(t), \boldsymbol{q}(t)) : I \to \mathbb{S}^3$$

is a time-dependent unit quaternion. Subsuming, the full eqations of motion are:

$$\begin{aligned}
\frac{d^2\boldsymbol{r}}{dt^2} &= \frac{5}{7M}\boldsymbol{\tau} \times \boldsymbol{n} - \frac{5g}{7}(\boldsymbol{e}_z)_{\parallel}, \\
\frac{d\boldsymbol{\Omega}_{\parallel}}{dt} &= \frac{5}{7MR^2}\boldsymbol{\tau}_{\parallel} - \frac{5g}{7R}\boldsymbol{n} \times \boldsymbol{e}_z, \\
\frac{d\Omega_{\perp}}{dt} &= \frac{5}{7MR^2}\tau_{\perp}, \\
\frac{d(q_0, \boldsymbol{q})}{dt} &= \frac{1}{2}(0, \boldsymbol{\Omega}) \cdot (q_0, \boldsymbol{q}).
\end{aligned} \tag{9}$$

2.2 Numerical Solution

The equations of motion were solved with our program `magsphere`.[6] We implemented a Runge-Kutta-Munthe-Kaas-4 method, combining the quaternion-adapted Munthe-Kaas integrator with the Runge-Kutta 4 algorithm.[7][8] To avoid numerical instability at the discontinuities in Equation 8, we approximated

$$\operatorname{sgn}(\dot{\boldsymbol{r}}) \approx \tanh(k\|\dot{\boldsymbol{r}}\|),$$

where k is a dimensionless constant describing the steepness of tanh around the origin. For the rolling resistance coefficient, we estimated $\nu_{\mathrm{r}} = 0.002$ based on values of ν_{r} for tires on steel and rubber surfaces.[9] Assuming the International Standard Atmosphere and moderate velocities, values of $\rho = 1.2\,\mathrm{kg m^{-3}}$ and $C = 0.47$ were used for simulations.[10][11]

3 Results

3.1 Influence of the magnetic moment

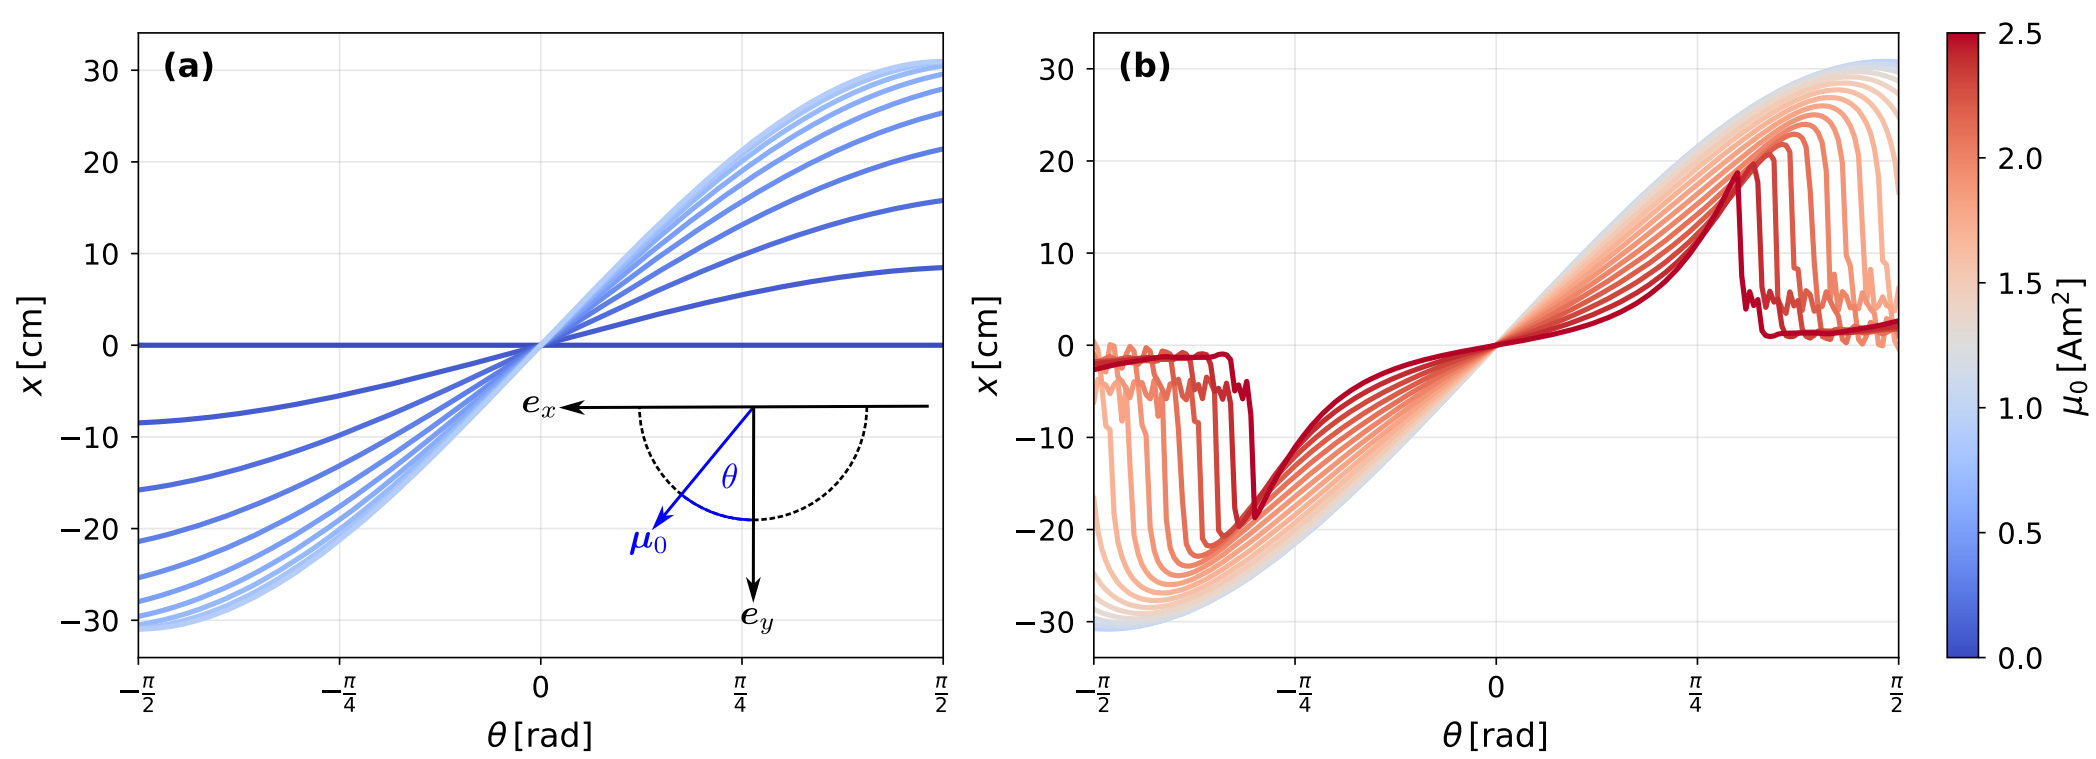

Figure 2: Final deviation $x|_{t=1\,\mathrm{s}}$ in relation to polar angle θ and modulus μ_0. Each graph is associated with a fixed modulus μ_0, where (a) shows curves for moduli below $1\,\mathrm{Am}^2$ and (b) for moduli including and above $1\,\mathrm{Am}^2$. In the small μ_0-regime (a), the final derviation increases in magnitude with θ and is antisymmetric around the origin. The high μ_0-regime (b) displays similar antisymmetry, yet different behaviour for high magnitudes of θ. With increasing modulus, critical points shift towards lower absolute values of θ, after which the curves behave erratic.

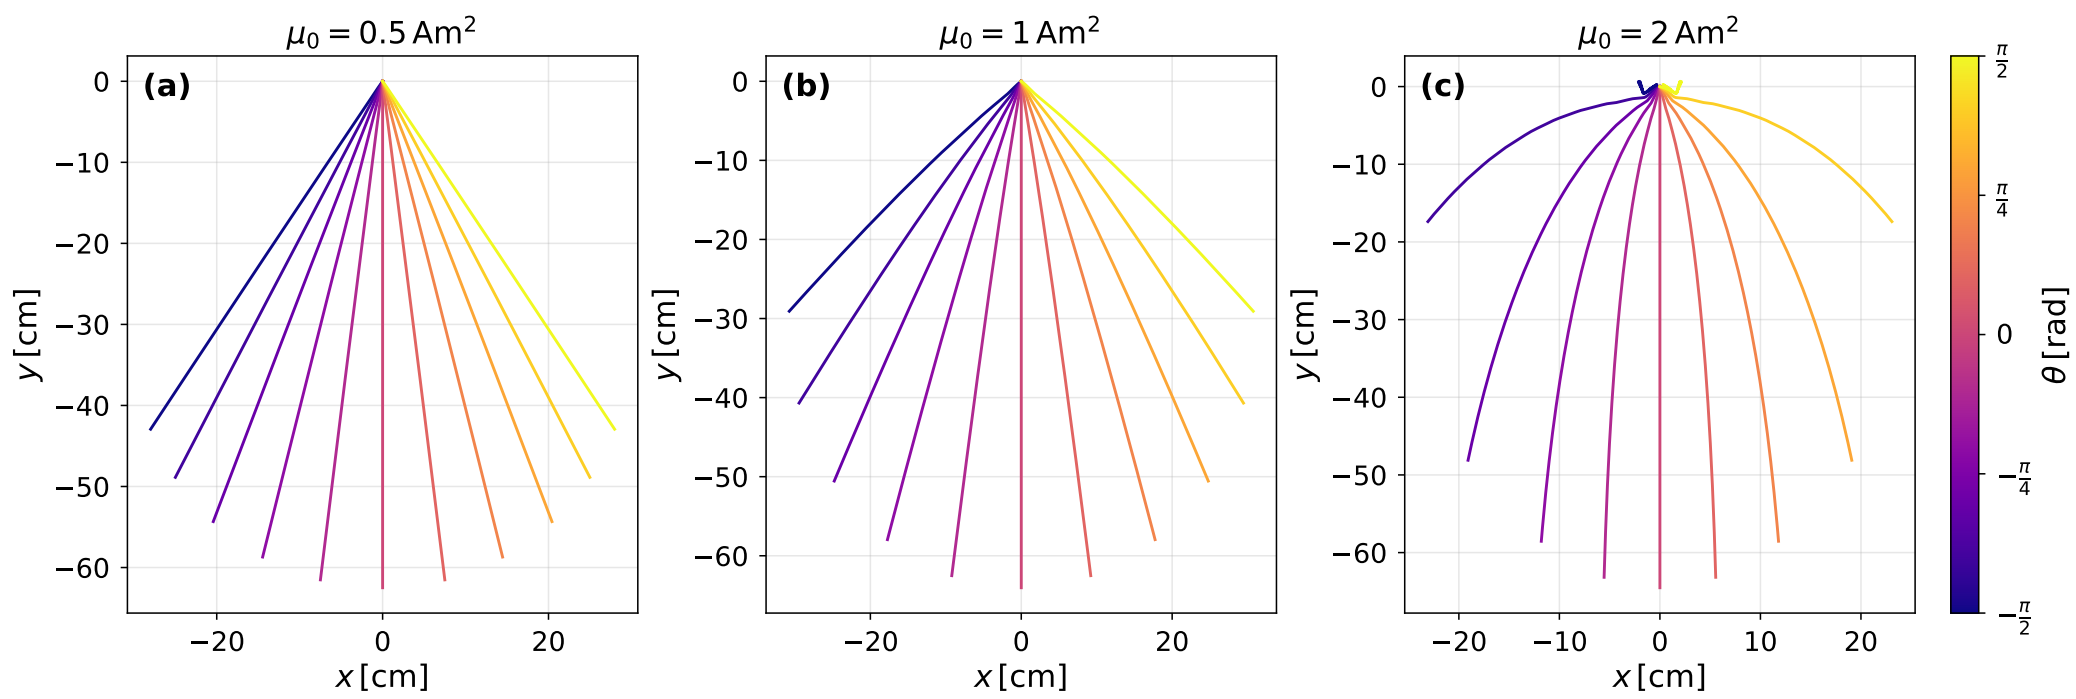

Figure 3: Trajectories on the xy-plane for selected moduli.

We investigated the influence of the initial magnetic moment vector $\boldsymbol{\mu}_0$ on the trajectories for an incline angle of $\varphi = 10°$. Firstly focussing on the influence of the deviation of $\boldsymbol{\mu}_0$ from the plane spanned by $\boldsymbol{B}$ and the downhill direction, we parametrized

$$\boldsymbol{\mu}_0 = \mu_0(\sin\theta, \cos\theta, 0)^\top$$

with $\mu_0 := \|\boldsymbol{\mu}_0\|$ and the polar angle θ defined as depicted in Figure 2. We chose the value of the x-coordinate after 1 s as measure for the deviation of the actual trajectory from a straight downhill path. The results are also shown in Figure 2. Antisymmetric behaviour in θ is predicted by $\boldsymbol{\mu}(-\theta) = -\boldsymbol{\mu}(\theta)$. The deviation from the straight path grows non-linearly with μ_0 until a critical point is reached. Figure 3 shows representative trajectories demonstrating that the curvature of the trajectories increases with μ_0 and θ.

4 References

[1] Pierre Crépel. "Jean Le Rond D'Alembert, Traité de dynamique (1743, 1758)". In: *Landmark Writings in Western Mathematics 1640-1940*. Elsevier, 2005, pp. 159–167. ISBN: 9780444508713. DOI: 10.1016/b978-044450871-3/50092-9.

[2] J. L Lagrange, William Thomson Kelvin, and William and Howie. *Méchanique analitique*. Chez la veuve Desaint, 1788. DOI: 10.5479/sil.322586.39088000898585.

[3] C. A. (Charles Augustin) Coulomb. *Théorie des machines simples : en ayant égard au frottement de leurs parties et à la roideur des cordages.* DOI: 10.14711/spcol/b668151.

[4] Hisao Hayakawa. "Langevin equation with Coulomb friction". In: *Physica D: Nonlinear Phenomena* 205.1-4 (2005), pp. 48–56. ISSN: 0167-2789. DOI: 10.1016/j.physd.2004.12.011.

[5] Lev Davidovič Landau and Evgenij M. Lifšic. *Landau. Lev Davidovič.* 2. Engl. ed., rev., repr. with corr. Vol. 6. Fluid mechanics. Aus d. Russ. übers. Oxford [u.a.]: Butterworth-Heinemann, 2002. 539 pp. ISBN: 0080339328.

[6] Rasmus Curt Raschke, Tim Matthies, and Elena Vedmedenko. *magsphere.cpp*. https://github.com/RasmusRaschke/hiwi25. 2026.

[7] J.C. Butcher. "A history of Runge-Kutta methods". In: *Applied Numerical Mathematics* 20.3 (Mar. 1996), pp. 247–260. ISSN: 0168-9274. DOI: 10.1016/0168-9274(95)00108-5.

[8] Hans Munthe-Kaas. "Runge-Kutta methods on Lie groups". In: *BIT Numerical Mathematics* 38.1 (Mar. 1998), pp. 92–111. ISSN: 1572-9125. DOI: 10.1007/bf02510919.

[9] Sándor Guba et al. "Laboratory Measurement of Rolling Resistance Coefficient under Different Conditions". In: *Hungarian Journal of Industry and Chemistry* 51.1 (May 2023), pp. 23–27. ISSN: 0133-0276. DOI: 10.33927/hjic-2023-04.

[10] International Organization for Standardization. *Standard Atmosphere.* Geneva, 1975.

[11] Wilfred E. Baker, ed. *Explosion hazards and evaluation.* Fundamental studies in engineering 5. Includes bibliographical references (pages 729-798) and index. Amsterdam: Elsevier Scientific Pub. Co, 1983. 18073 pp. ISBN: 0444599886.