

TEST PRODUCT 123


This is a test description for the product.

MODELS


MODEL-A, MODEL-B, MODEL-C

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

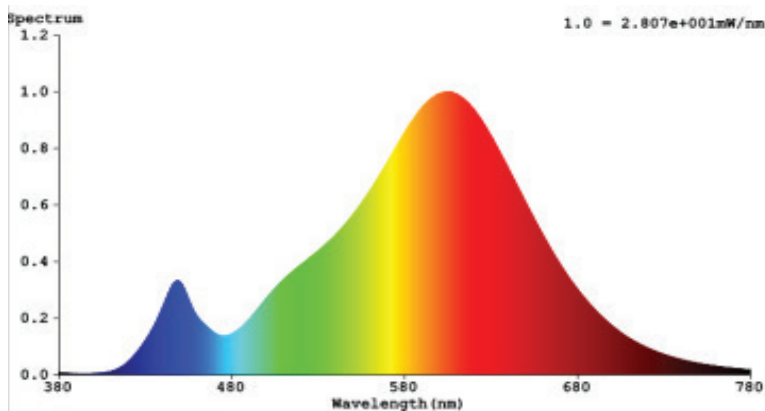


CIE1931 Chromaticity Diagram

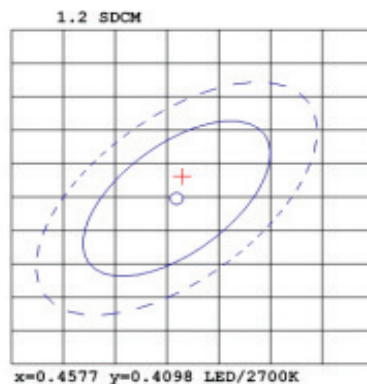

CERTIFICATIONS



Energy Star Certified

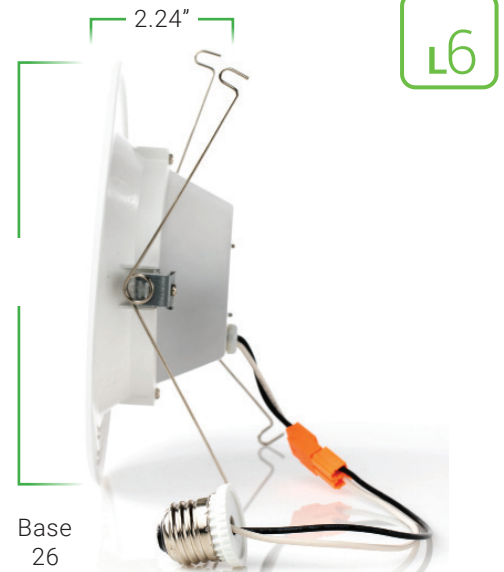

SPECIFICATIONS

Voltage	120V
Wattage	15W
Current	0.125A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	1200 lm
Equivalency	100W
Color Temperature	2700K-5000K
Color Rendering Index (CRI)	90+
Beam Angle	120°
Dimmable	Yes
Efficiency (lm/w)	80 lm/W
Frequency	60Hz

ENVIRONMENT

Operating Temperature	-20°F to 120°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Aluminum
Weight	0.5 lbs

LIFESPAN

Average Life (Hours)	50,000 hrs
Warranty	5 Years
Switching Time	>50,000