


## 5/6" Selectable Retrofit Baffle Downlight

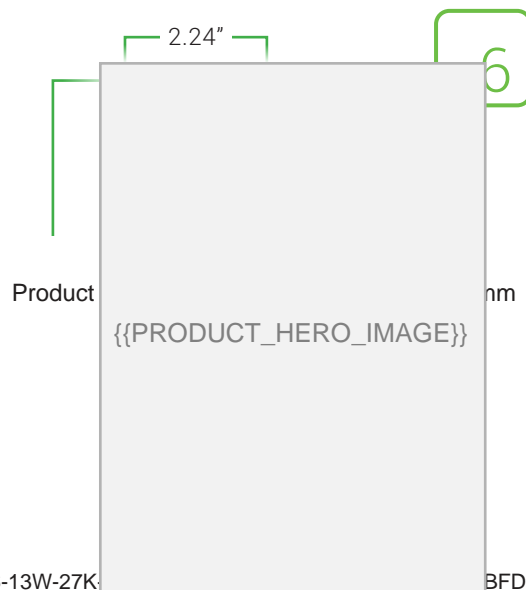


## MODELS

DL BFDR56-13W-27K-1PK; DL BFDR56-13W-27K-2PK; DL BFDR56-13W-27K-4PK; DL BFDR56-13W-27K

BFDR56-13V

## LIGHT DISTRIBUTION ANGLE

## SPECTRUM DISTRIBUTION

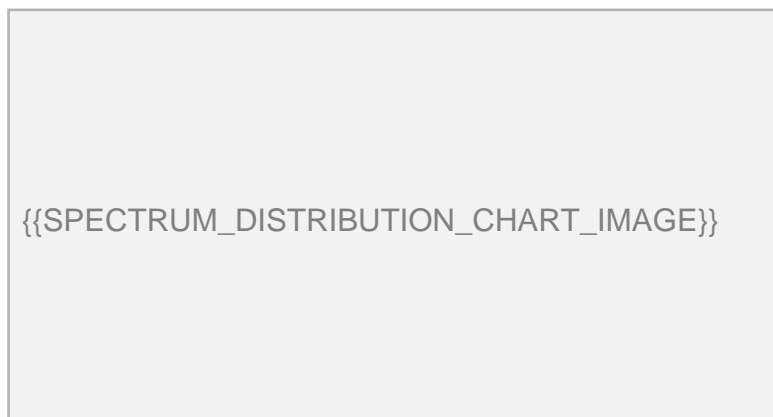

### CIE1931 Chromaticity Diagram



## CERTIFICATIONS



Energy Star: No

## SPECIFICATIONS

Voltage	120V
Wattage	13W
Current	0.15A
Power Factor	0.7

## LIGHTING PERFORMANCE

Lumens	965 lm
Equivalency	
Color Temperature	2700K / 3000K / 4000K / 5000K
Color Rendering Index (CRI)	80+
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	74 lm/W
Frequency	

## ENVIRONMENT

Operating Temperature	-4°F to 104°F
Suitable for Damp Locations Ingress	Damp

## CONSTRUCTION

Housing	
Weight	0.3 lbs

## LIFESPAN

Average Life (Hours)	50,000 hours
Warranty	
Switching Time	