

TEST PRODUCT 123

This is a test description.

MODELS

MODEL-A, MODEL-B

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

{{SPECTRUM_DISTRIBUTION_CHART_IMAGE}}


CIE1931 Chromaticity Diagram

{{CHROMATICITY_DIAGRAM_IMAGE}}

CERTIFICATIONS



Energy Star Certified

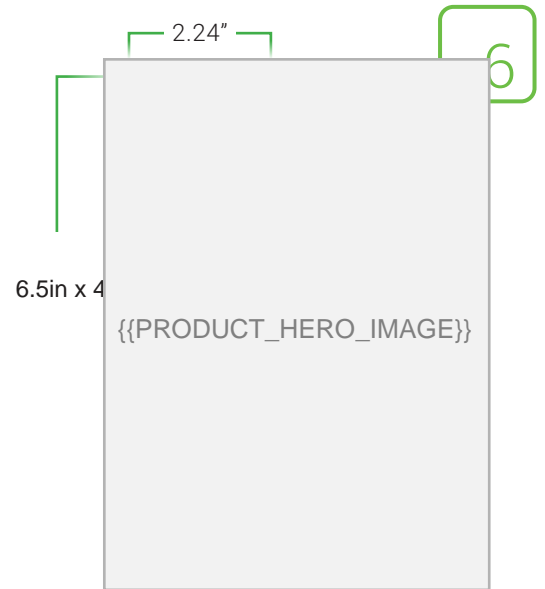

SPECIFICATIONS

Voltage	120V
Wattage	15W
Current	0.125A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	1200 lm
Equivalency	100W
Color Temperature	2700K-5000K
Color Rendering Index (CRI)	90+
Beam Angle	120deg
Dimmable	Yes
Efficiency (lm/w)	80
Frequency	60Hz

ENVIRONMENT

Operating Temperature	-20F to 120F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Aluminum
Weight	0.5 lbs

LIFESPAN

Average Life (Hours)	50000 hrs
Warranty	5 Years
Switching Time	50000+