



LOGISIM


29.

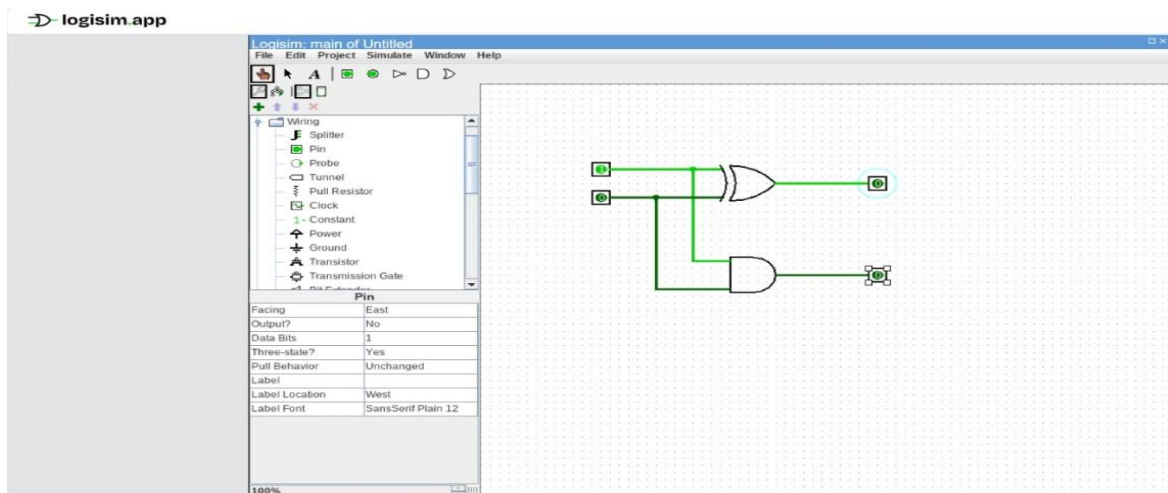

30.

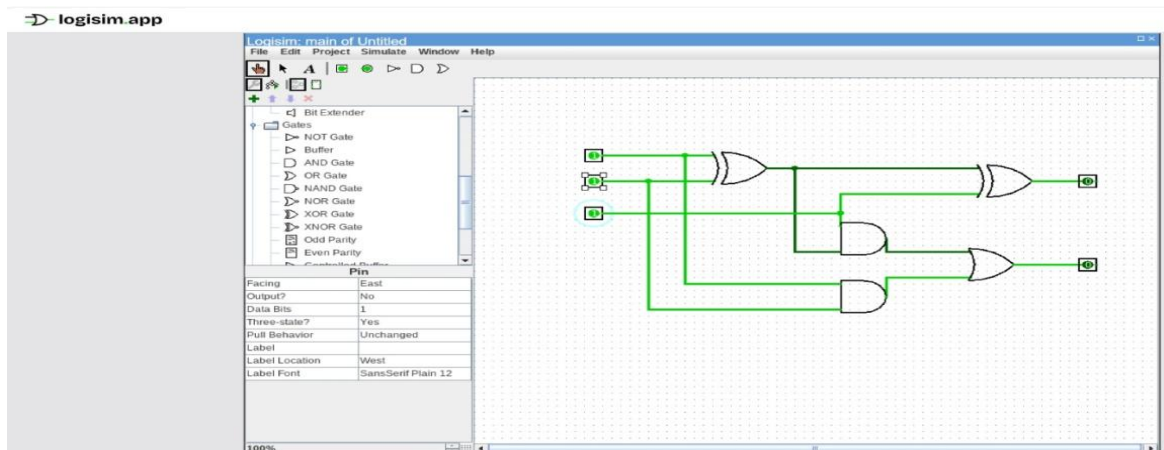

31.

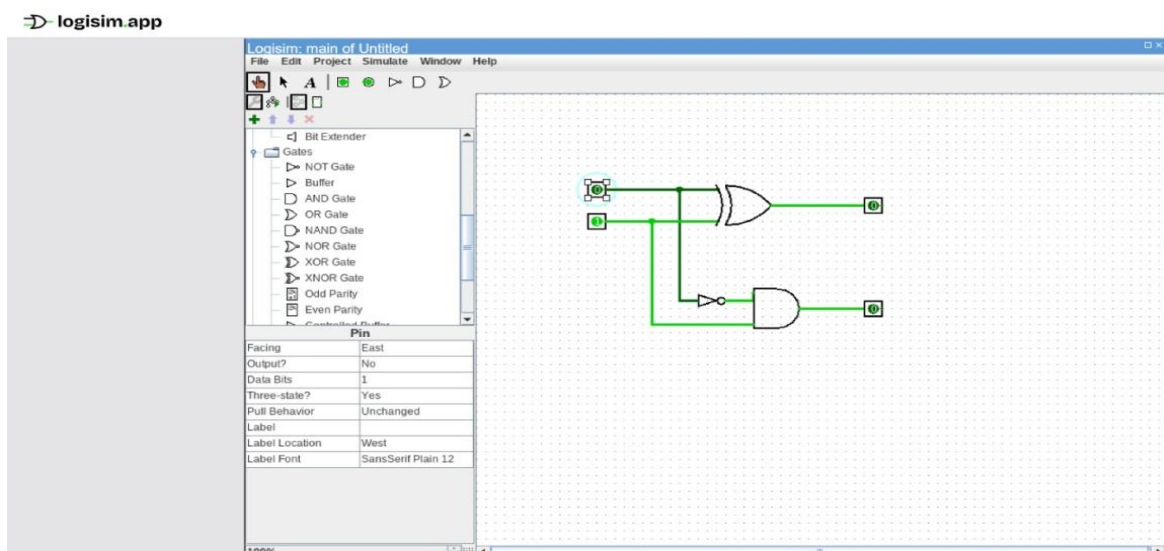

The screenshot displays the Proteus 8.0 SP3 software interface. The top menu bar includes File, Edit, Project, Simulate, Window, and Help. Below the menu bar is a toolbar with various icons for file operations, editing, and simulation. On the left side, there is a 'Circuit: main' section with a table of circuit parameters:

Circuit: main	
Circuit Name	main
Shared Label	
Shared Label Facing	East
Shared Label Font	SansSerif Plain 12

The main workspace shows a logic circuit diagram. It features three input pins (green circles) on the left. The circuit includes an OR gate, an AND gate, a NOT gate, and a final OR gate. The output is a single green circle on the right. The circuit is drawn on a grid background.

The screenshot shows the LogicSim main interface. The circuit diagram is a 2-to-1 multiplexer implemented using three 2-input OR gates and one 2-input AND gate. The inputs are A and B, and the select line is S. The output is Y. The logic is: $Y = (A \text{ AND } S) \text{ OR } (B \text{ AND } \text{NOT } S)$. The interface includes a menu bar (File, Edit, Project, Simulate, Window, Help), a toolbar, a component library on the left, and a circuit properties panel at the bottom left.