Q- In Cisco Packet Tracer, create two separate networks (representing two branch offices) using two routers and configure basic IP addressing so that each network can ping its own devices.

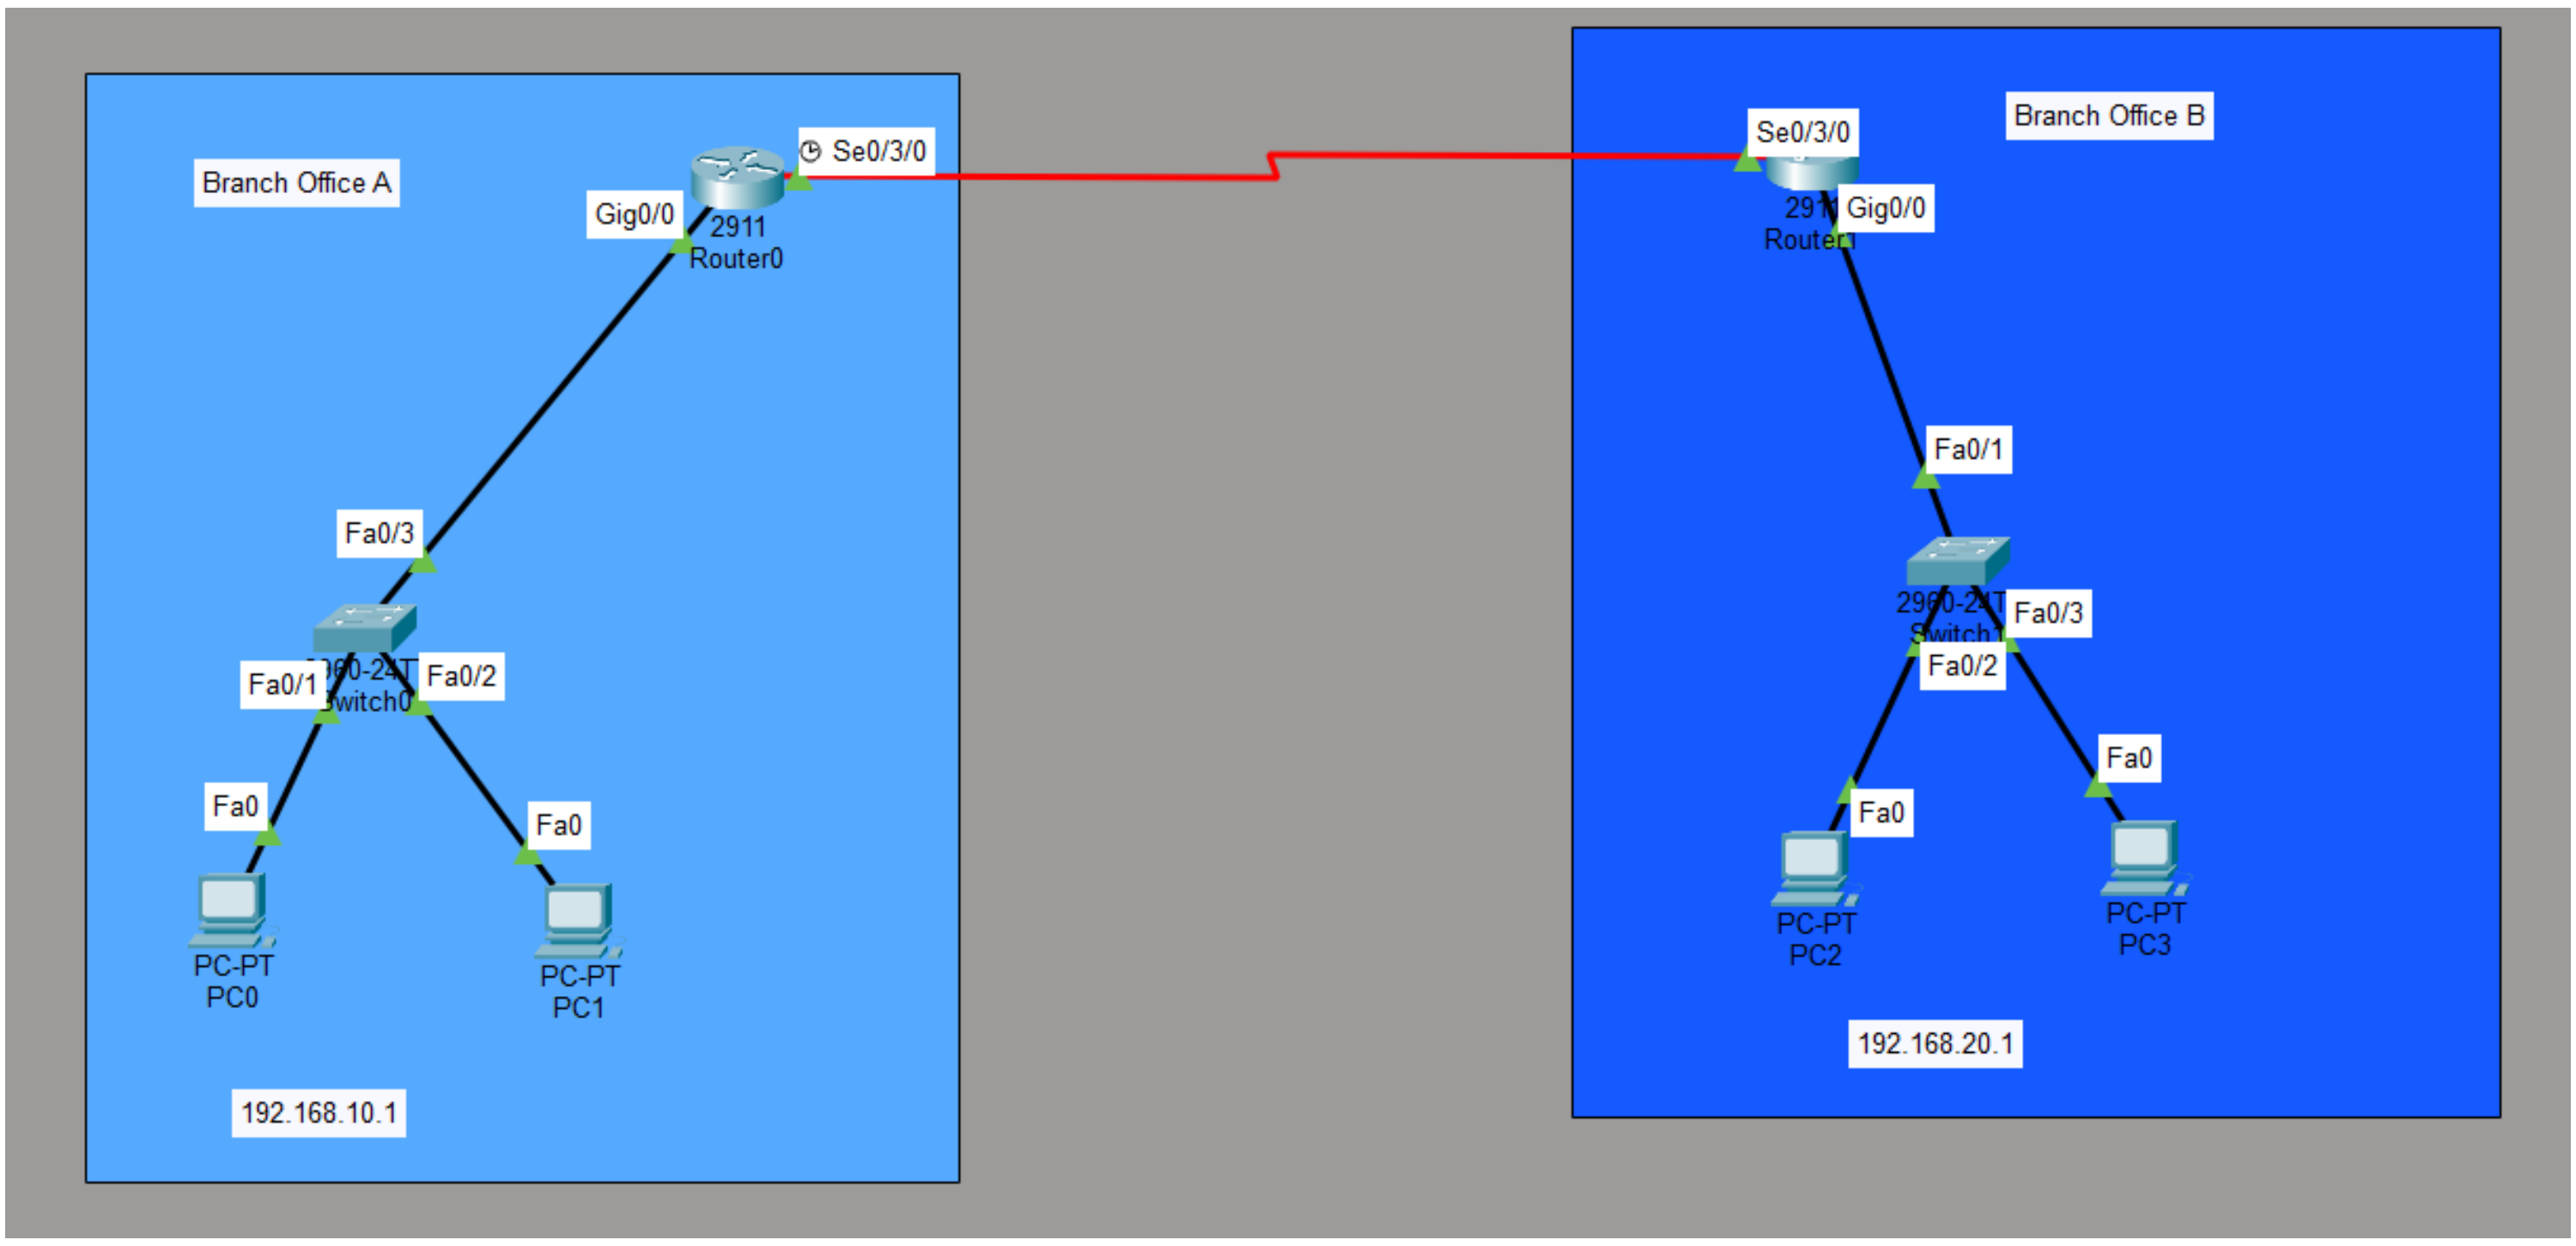

Router 0

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface Serial0/3/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#ip address 10.0.0.1 255.255.255.252
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
```

Router 1

```
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface Serial0/3/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#ip address 10.0.0.2 255.255.255.252
Router(config-if)#no shutdown
```

IP Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
Router0	G0/0	192.168.10.1	255.255.255.0	—
Router0	G0/1	10.0.0.1	255.255.255.252	—
PC0	FastEthernet0	192.168.10.10	255.255.255.0	192.168.10.1
PC1	FastEthernet0	192.168.10.11	255.255.255.0	192.168.10.1
Router1	G0/0	192.168.20.1	255.255.255.0	—
Router1	G0/1	10.0.0.2	255.255.255.252	—
PC2	FastEthernet0	192.168.20.10	255.255.255.0	192.168.20.1
PC3	FastEthernet0	192.168.20.11	255.255.255.0	192.168.20.1

Verification

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.11

Pinging 192.168.10.11 with 32 bytes of data:

Reply from 192.168.10.11: bytes=32 time<1ms TTL=128
Reply from 192.168.10.11: bytes=32 time=1ms TTL=128
Reply from 192.168.10.11: bytes=32 time<1ms TTL=128
Reply from 192.168.10.11: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.10.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

The task was completed successfully. Both branch offices were configured with separate IP networks, and each branch could ping its own devices.