**Q- Configure Port Address Translation (PAT) on a router in your simulated WAN so that three devices from the internal network can browse the internet using a single public IP address.

Hint: Use the 'overload' keyword in your NAT configuration.**

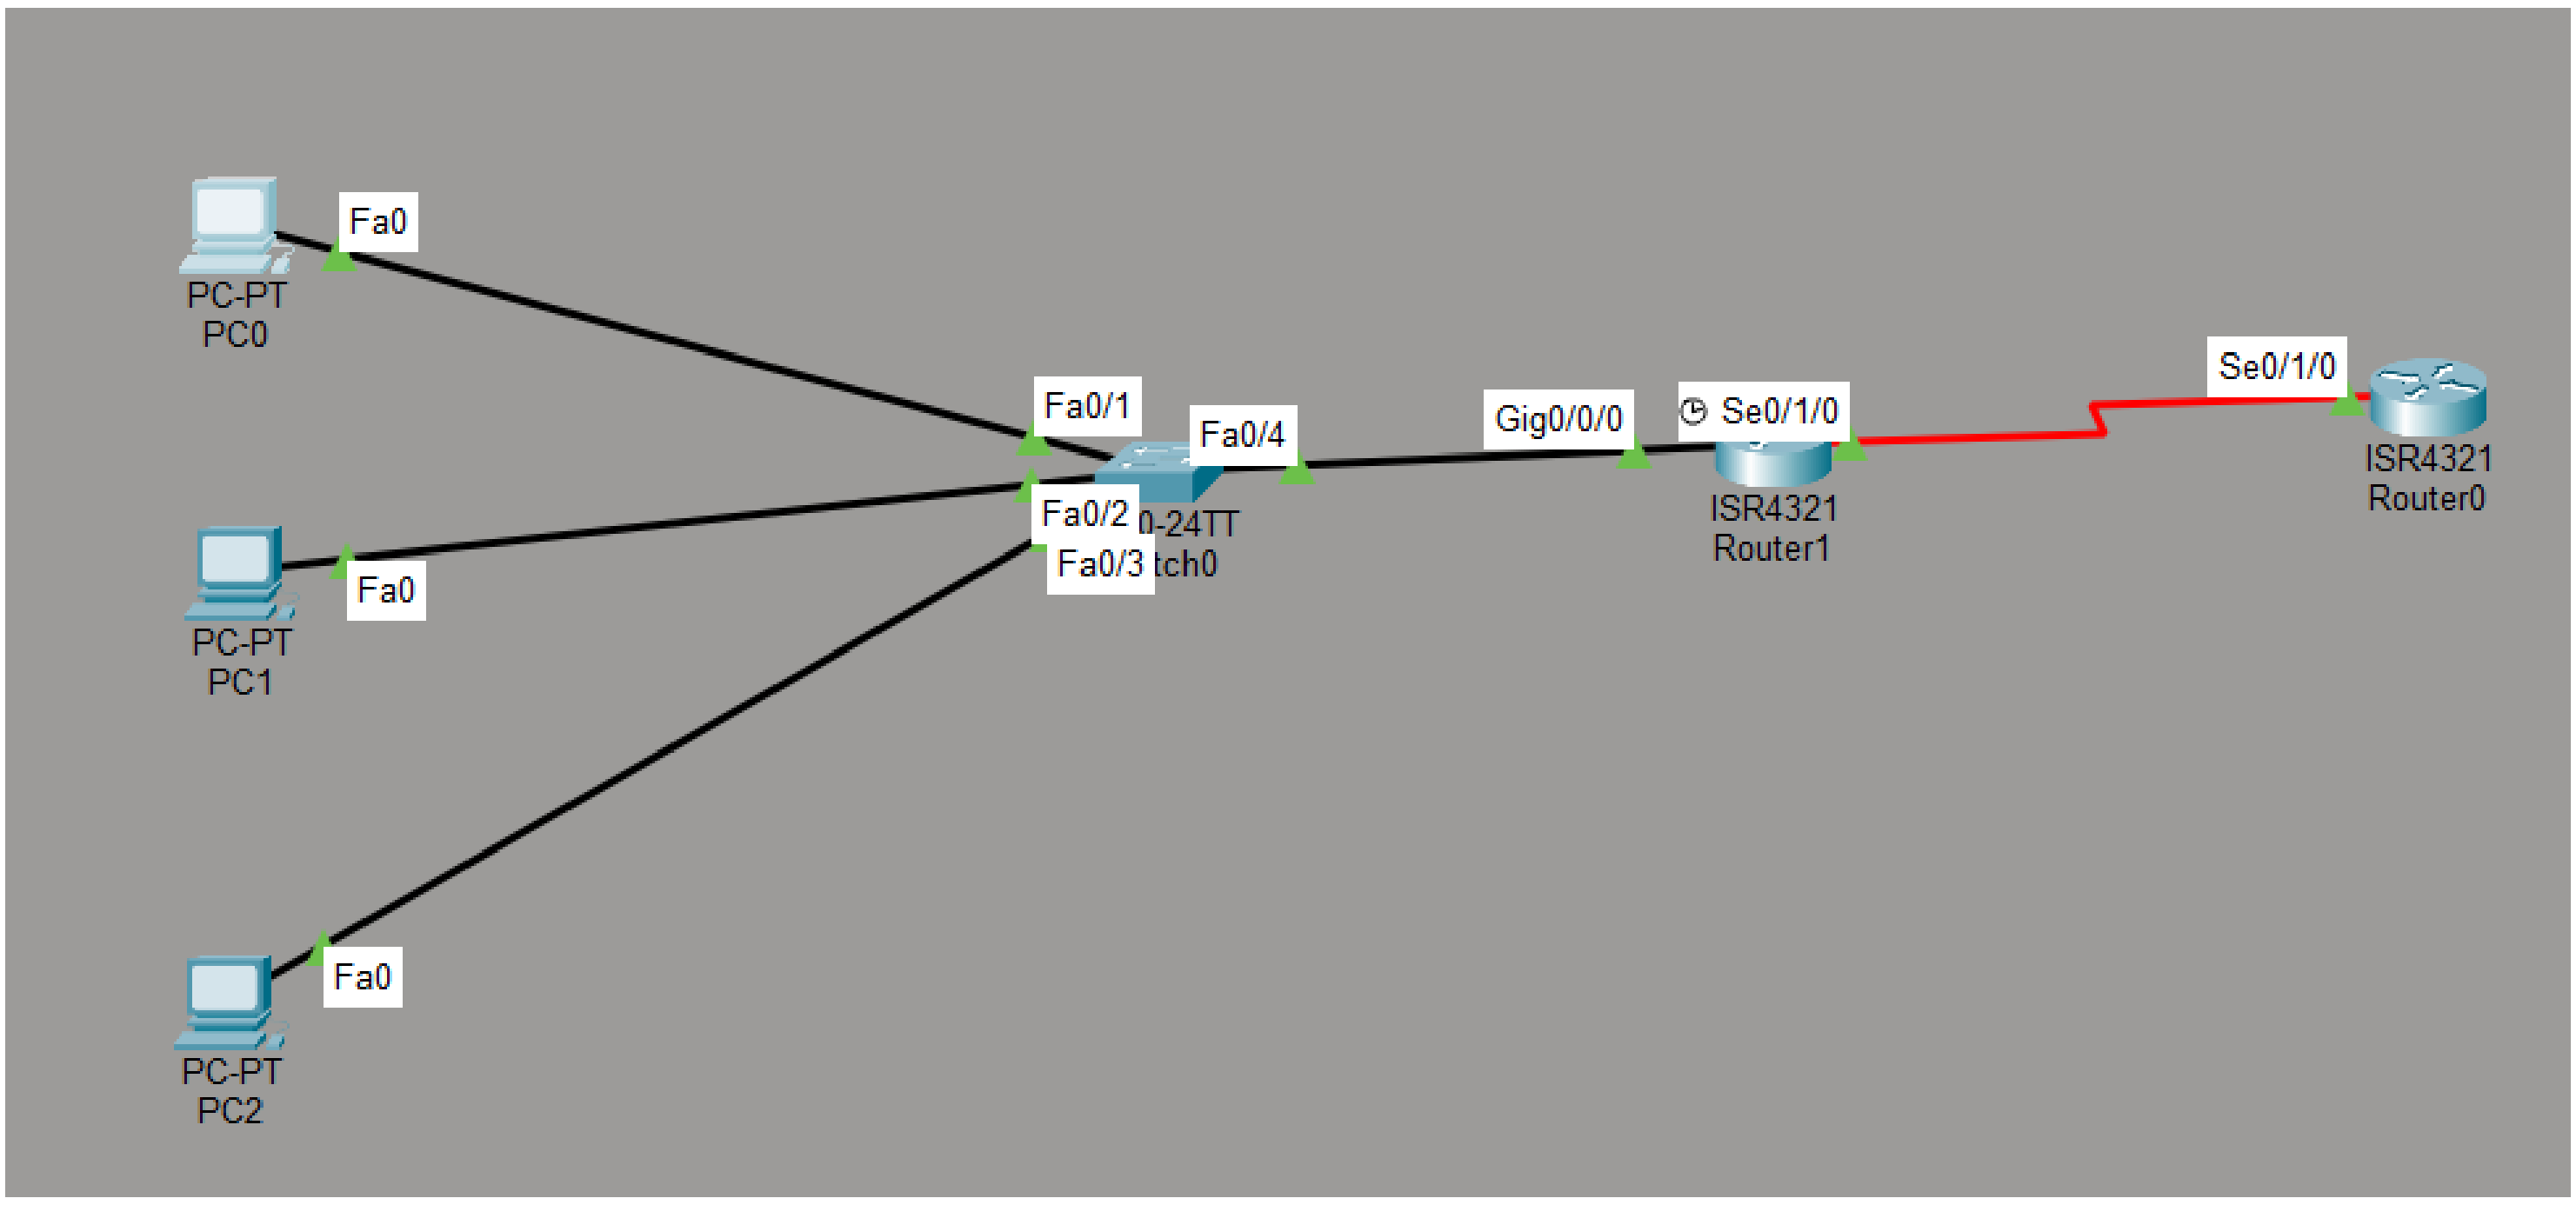

Router 0

```
Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int s 0/1/0
Router(config-if)#ip address 200.1.1.1 255.255.255.252
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/1/0, changed state to up

Router(config-if)#exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up

Router(config)#ip route 192.168.1.0 255.255.255.0 200.1.1.2
Router(config)#
```

Router 1

```
Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int g 0/0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#ip nat inside
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up

Router(config-if)#int s 0/1/0
Router(config-if)#ip address 200.1.1.2 255.255.255.252
Router(config-if)#ip nat outside
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial0/1/0, changed state to down
Router(config-if)#exit
Router(config)#
%LINK-5-CHANGED: Interface Serial0/1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up

Router(config)#access-list 1 permit 192.168.1.0 0.0.0.255
Router(config)#ip nat inside source list 1 interface serial 0/1/0 overload
Router(config)#ip route 0.0.0.0 0.0.0.0 200.1.1.1
Router(config)#do wr
Building configuration...
[OK]
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#ping 200.1.1.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 200.1.1.1, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/7/19 ms

Router#show ip nat translations
Pro  Inside global     Inside local       Outside local      Outside global
icmp 200.1.1.2:5       192.168.1.2:5      200.1.1.1:5        200.1.1.1:5
icmp 200.1.1.2:6       192.168.1.2:6      200.1.1.1:6        200.1.1.1:6
icmp 200.1.1.2:7       192.168.1.2:7      200.1.1.1:7        200.1.1.1:7
icmp 200.1.1.2:8       192.168.1.2:8      200.1.1.1:8        200.1.1.1:8

Router#
```

PC 0 Ping

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:

Reply from 200.1.1.1: bytes=32 time=2ms TTL=254
Reply from 200.1.1.1: bytes=32 time=1ms TTL=254
Reply from 200.1.1.1: bytes=32 time=1ms TTL=254
Reply from 200.1.1.1: bytes=32 time=1ms TTL=254

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\>
```