


Q- Add a third PC to your network, connect it to the switch, and ping from PC3 to PC1. Observe and record how the MAC address table changes after this communication.

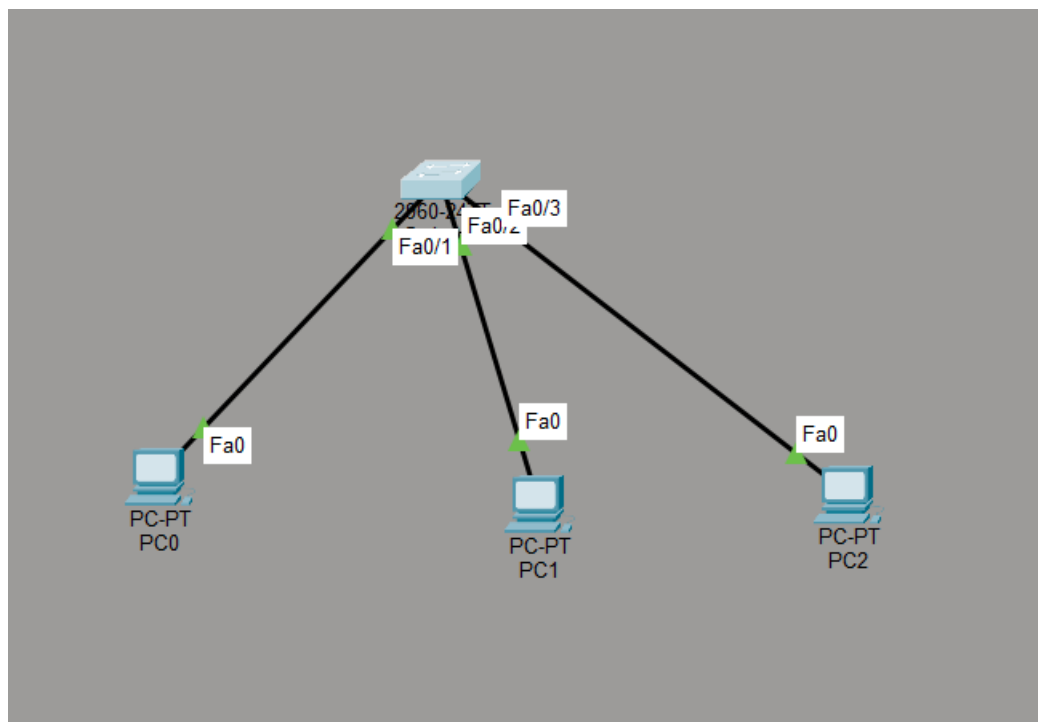

```
Switch>en
Switch#show mac address-table
      Mac Address Table
-----
Vlan  Mac Address      Type      Ports
----  -
  1    0001.631a.130e    DYNAMIC   Fa0/1
  1    00e0.a3ae.3e09    DYNAMIC   Fa0/3
Switch#show mac address-table
      Mac Address Table
-----
Vlan  Mac Address      Type      Ports
----  -
  1    0001.631a.130e    DYNAMIC   Fa0/1
  1    00d0.97ad.a23a    DYNAMIC   Fa0/2
  1    00e0.a3ae.3e09    DYNAMIC   Fa0/3
Switch#
```

Before PC3 communicated with the network, its MAC address was not present in the switch's dynamic MAC address table.

After PC3 sent a ping to PC1, the switch received frames from PC3 and learned its source MAC address.

The ping from PC3 to PC1 was successful. After the communication, the switch automatically learned PC3's MAC address and added it to the MAC address table with Fa0/3.