


Q-Refactor your VLAN and SVI configuration so that VLAN 30 uses a different subnet mask (e.g., /25 instead of /24). Explain what changes you made and how this affects communication with the other VLANs.

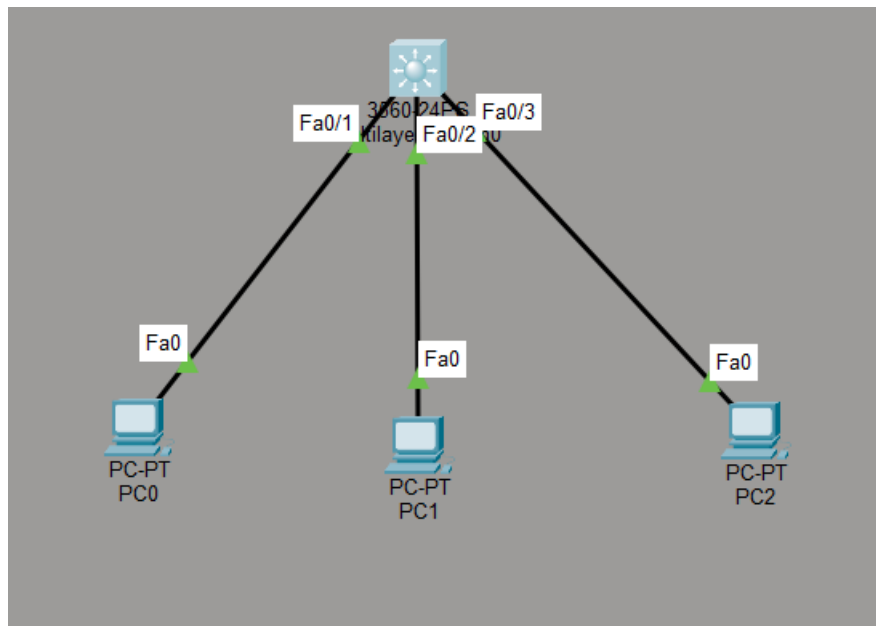

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int vlan 10
Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan10, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan10, changed state to up

Switch(config-if)#ip address 192.168.10.1 255.255.255.0
Switch(config-if)#no shut
Switch(config-if)#exit
Switch(config)#int vlan 20
Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan20, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to up

Switch(config-if)#ip address 192.168.20.1 255.255.255.0
Switch(config-if)#no shut
Switch(config-if)#exit
Switch(config)#int vlan 30
Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan30, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan30, changed state to up

Switch(config-if)#ip address 192.168.30.1 255.255.255.0
Switch(config-if)#no shut
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

VLAN 30 Subnet mask change

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int vlan 30
Switch(config-if)#ip address 192.168.30.1 255.255.255.128
Switch(config-if)#no shut
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
```

PC 2 IP address

