


Cisco Packet Tracer Network Configuration Report


Objective



Build a Packet Tracer network, assign IP addresses, configure the router interfaces, verify connectivity using ping, and document the configuration process.

1. Open Cisco Packet Tracer.
2. Place one router, required switches (if used), and PCs in the workspace.
3. Connect devices using the correct cable types.

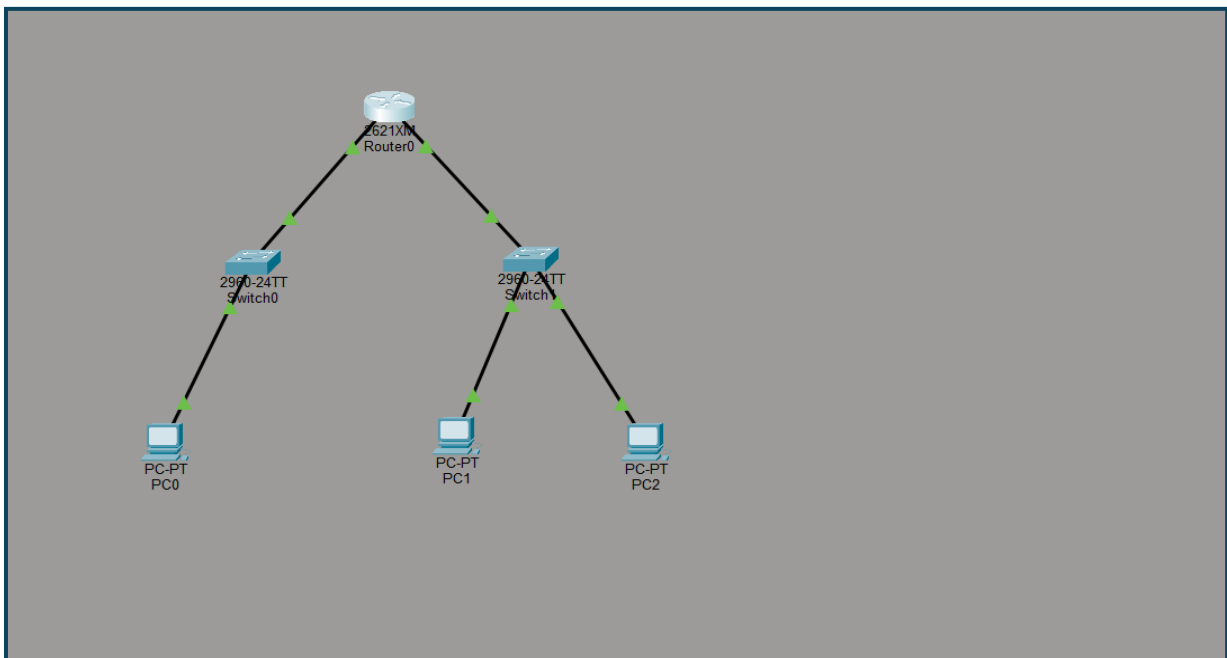

4. Configure IP addresses, subnet masks, and default gateways on each PC.

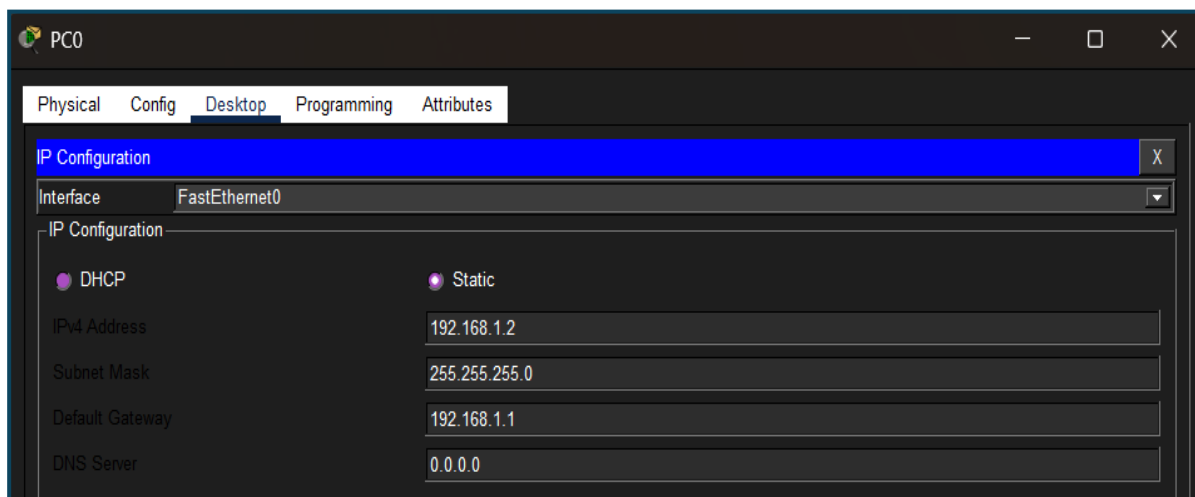

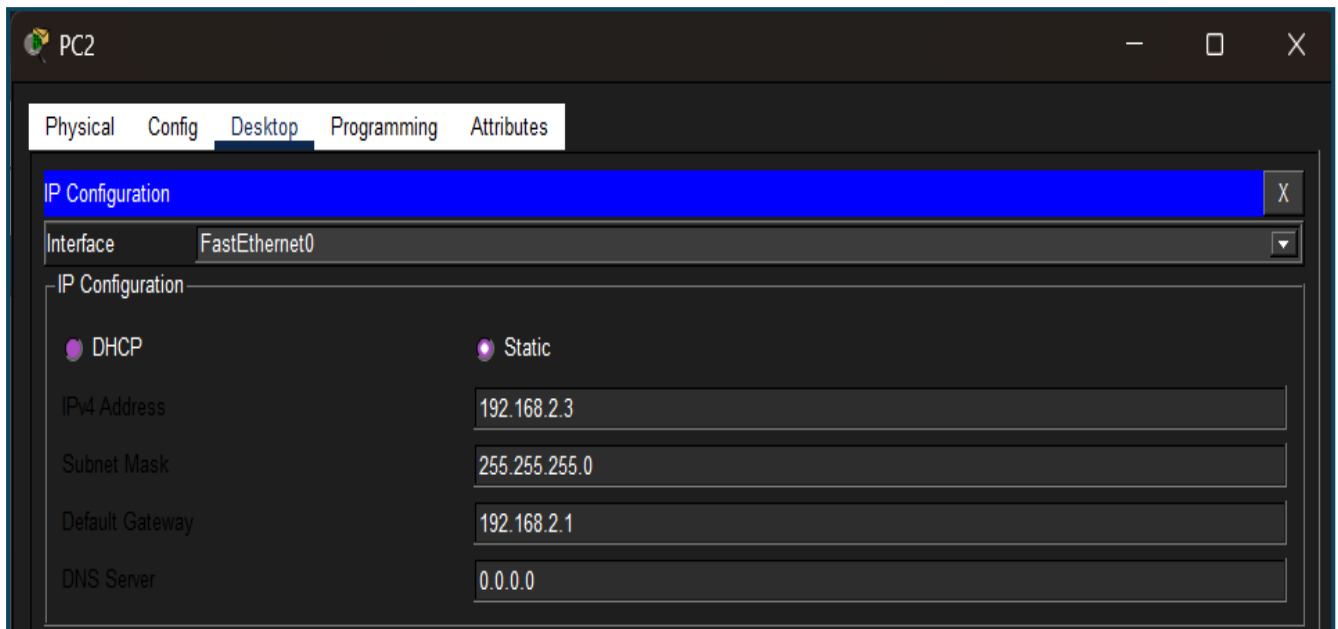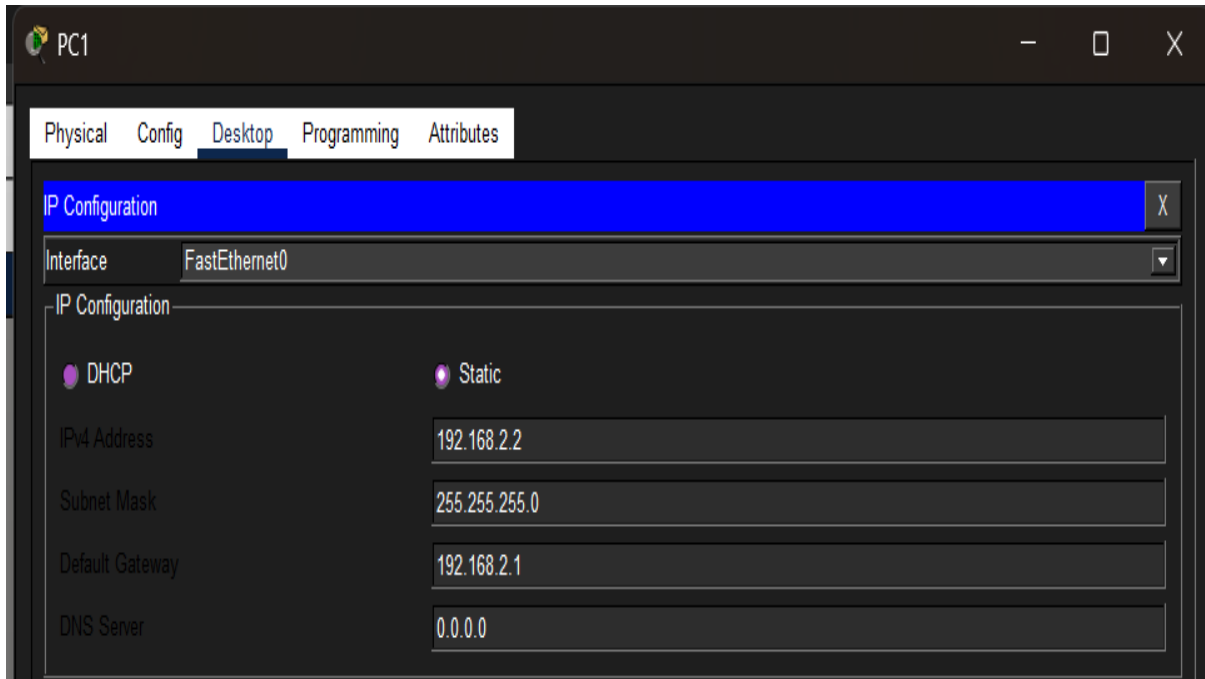

5. Configure router interfaces with IP addresses and enable them using the 'no shutdown' command

```
Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
^
% Invalid input detected at '^' marker.

Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface fa0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 192.168.1.1     YES manual up          up
FastEthernet0/1 192.168.2.1     YES manual up          up
Router#
```

6. Save the configuration.

7. Test connectivity by pinging between PCs.

```
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Reply from 192.168.2.2: bytes=32 time<1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

8. Verify successful replies from all devices