


Q-Configure a Router-on-a-Stick setup by creating sub-interfaces (e.g., GigabitEthernet0/0.10, .20, .30) on a simulated router, each with an IP address for the corresponding VLANs Insta, Zomato, and Flipkart.

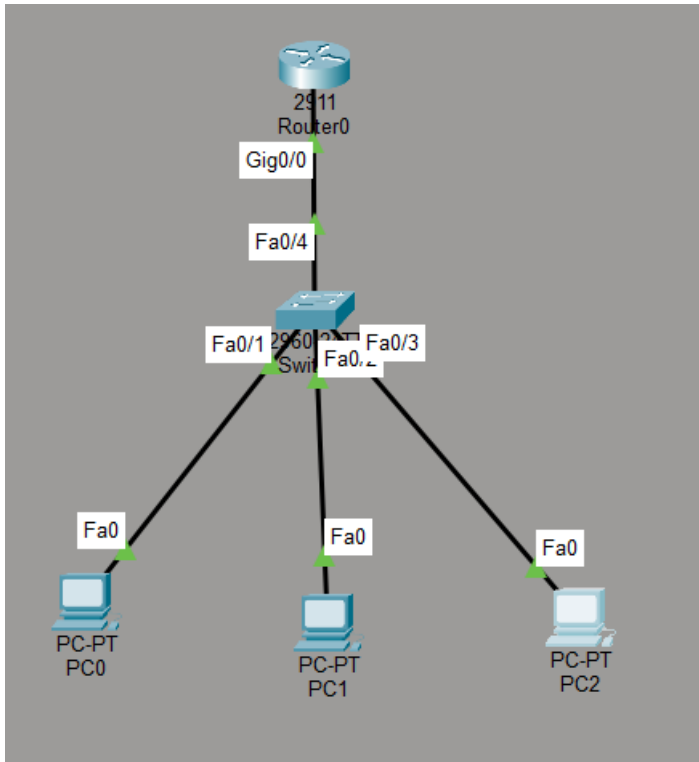

```
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int f 0/4
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch(config)#
```

```

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g 0/0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int g 0/0.10
Router(config-subif)#
%LINK-3-UPDOWN: Interface GigabitEthernet0/0.10, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.10, changed state to up

Router(config-subif)#encapsulation dot1Q 10
Router(config-subif)#ip address 192.168.10.1 255.255.255.0
Router(config-subif)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#int g 0/0.20
Router(config-subif)#
%LINK-3-UPDOWN: Interface GigabitEthernet0/0.20, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.20, changed state to up

Router(config-subif)#encapsulation dot1Q 20
Router(config-subif)#ip address 192.168.20.1 255.255.255.0
Router(config-subif)#no shut
Router(config-subif)#exit
Router(config)#int g 0/0.30
Router(config-subif)#
%LINK-3-UPDOWN: Interface GigabitEthernet0/0.30, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.30, changed state to up

Router(config-subif)#encapsulation dot1Q 30
Router(config-subif)#ip address 192.168.30.1 255.255.255.0
Router(config-subif)#no shut
Router(config-subif)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#

```

PC 0 Ping Test

```

C:\>ping 192.168.30.10

Pinging 192.168.30.10 with 32 bytes of data:

Reply from 192.168.30.10: bytes=32 time=8ms TTL=127
Reply from 192.168.30.10: bytes=32 time<1ms TTL=127
Reply from 192.168.30.10: bytes=32 time<1ms TTL=127
Reply from 192.168.30.10: bytes=32 time=1ms TTL=127

Ping statistics for 192.168.30.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 8ms, Average = 2ms

C:\>

```