


Q-Refactor your Router-on-a-Stick configuration to add a new VLAN called 'Spotify' without disrupting existing VLAN communication, and document the exact commands you used for both the switch and the router.

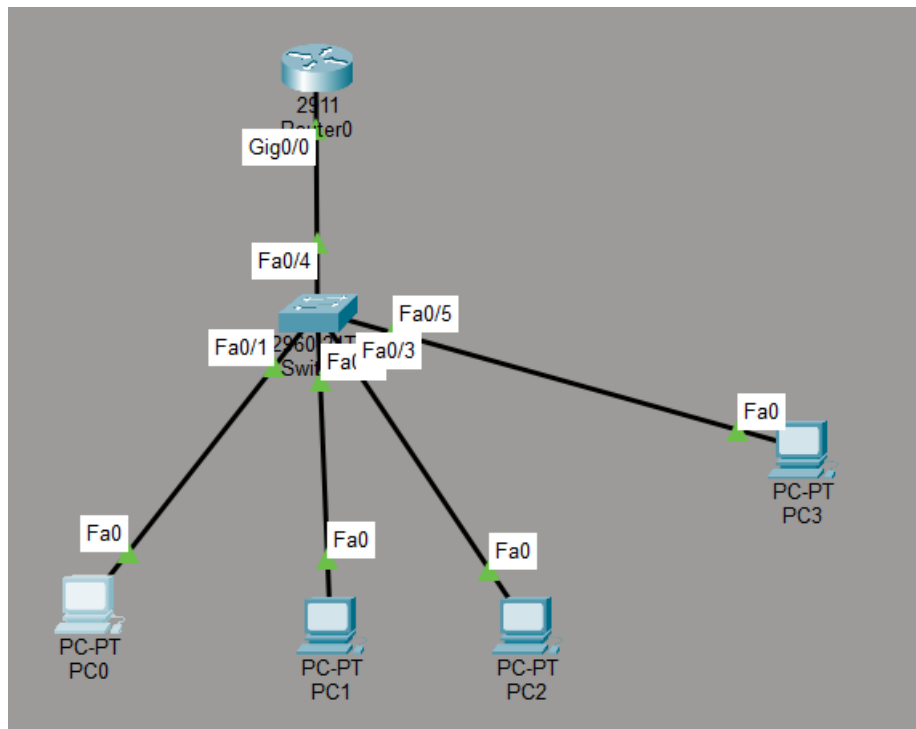

Switch

```
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 40
Switch(config-vlan)#name Spotify
Switch(config-vlan)#exit
Switch(config)#int
%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

% Incomplete command.
Switch(config)#int f 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 40
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#
```

Router

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g 0/0.40
Router(config-subif)#
%LINK-3-UPDOWN: Interface GigabitEthernet0/0.40, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.40, changed state to up

Router(config-subif)#encapsulation dot1Q 40
Router(config-subif)#ip address 192.168.40.1 255.255.255.0
Router(config-subif)#no shut
Router(config-subif)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#
```

Ping Test PC 0 to PC 3

```
C:\>ping 192.168.40.10

Pinging 192.168.40.10 with 32 bytes of data:

Reply from 192.168.40.10: bytes=32 time<1ms TTL=127
Reply from 192.168.40.10: bytes=32 time=2ms TTL=127
Reply from 192.168.40.10: bytes=32 time<1ms TTL=127
Reply from 192.168.40.10: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.40.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>
```