


Q-Set up a PPP connection between two routers in Packet Tracer and enable PAP (Password Authentication Protocol) authentication. Show the configuration commands and explain what happens if the password is incorrect.

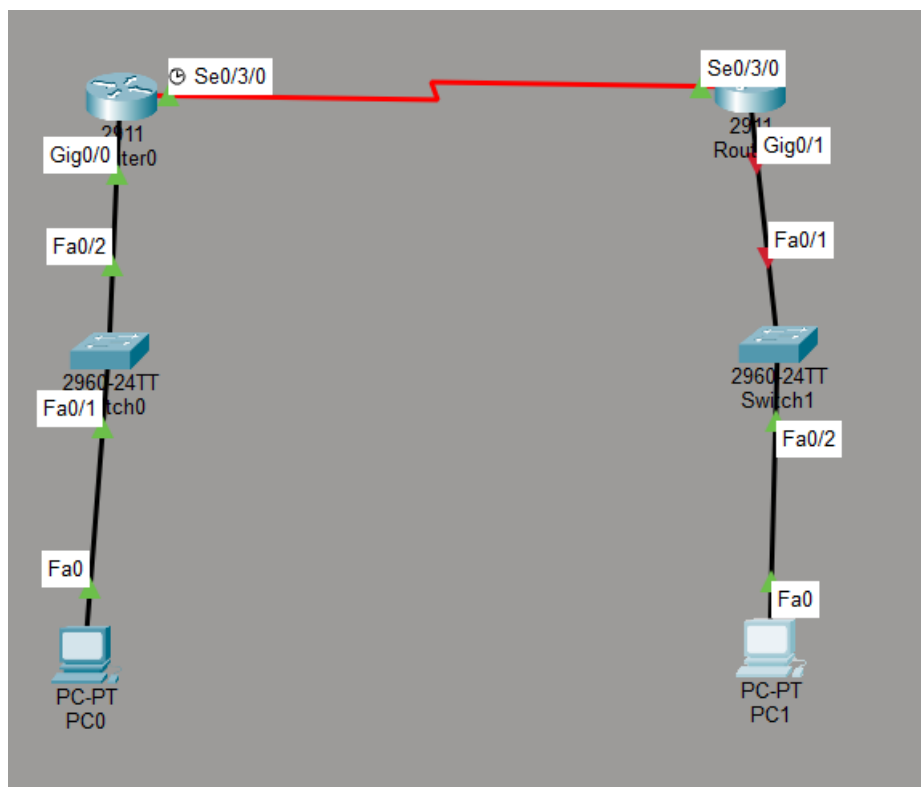

Router 0

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#username R2 password hello1
R1(config)#int s 0/3/0
R1(config-if)#ip address 10.0.0.1 255.255.255.252
R1(config-if)#en
R1(config-if)#encapsulation ppp
R1(config-if)#ppp authentication pap
R1(config-if)#ppp pap sent-username R1 password hello1
R1(config-if)#no shut

%LINK-5-CHANGED: Interface Serial0/3/0, changed state to down
R1(config-if)#exit
R1(config)#do wr
Building configuration...
[OK]
R1(config)#
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
R1(config)#exit
```

Router 1

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R2
R2(config)#username R1 password hello1
R2(config)#int s0/3/0
R2(config-if)#ip address 10.0.0.2 255.255.255.252
R2(config-if)#en
R2(config-if)#encapsulation ppp
R2(config-if)#ppp authentication pap
R2(config-if)#ppp pap sent-username R2 password hello1
R2(config-if)#no shut

R2(config-if)#
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up

R2(config-if)#exit
R2(config)#
```

```
R1#ping 10.0.0.2
```

```
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.2, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/3/9 ms
```

```
R1#show interfaces serial 0/3/0
Serial0/3/0 is up, line protocol is up (connected)
  Hardware is HD64570
  Internet address is 10.0.0.1/30
  MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation PPP, loopback not set, keepalive set (10 sec)
  LCP Open
  Open: IPCP, CDPCP
  Last input never, output never, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0 (size/max/drops); Total output drops: 0
  Queueing strategy: weighted fair
  Output queue: 0/1000/64/0 (size/max total/threshold/drops)
    Conversations 0/0/256 (active/max active/max total)
    Reserved Conversations 0/0 (allocated/max allocated)
    Available Bandwidth 1158 kilobits/sec
  5 minute input rate 5 bits/sec, 0 packets/sec
  5 minute output rate 5 bits/sec, 0 packets/sec
    5 packets input, 640 bytes, 0 no buffer
    Received 0 broadcasts, 0 runs, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    5 packets output, 640 bytes, 0 underruns
    0 output errors, 0 collisions, 1 interface resets
    0 output buffer failures, 0 output buffers swapped out
    0 carrier transitions
  DCD=up DSR=up DTR=up RTS=up CTS=up
```

```
R1#
```