


Q-Set up a PPP connection between two routers in Packet Tracer and enable PAP (Password Authentication Protocol) authentication. Show the configuration commands and explain what happens if the password is incorrect.

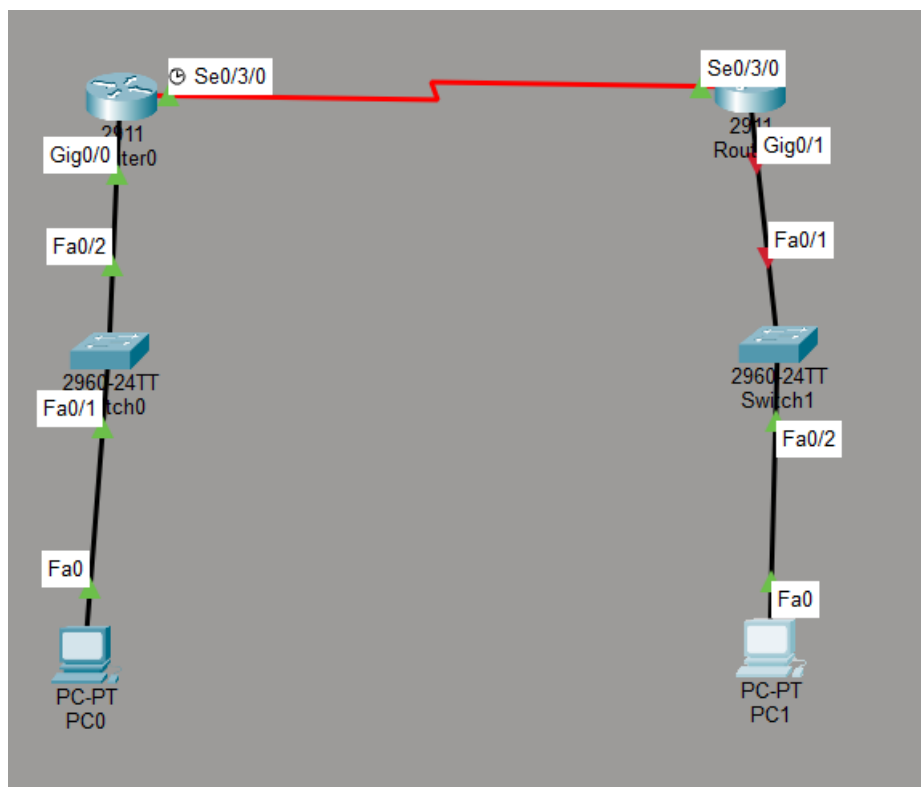

Router 0

```
R1(config)#interface serial 0/3/0
R1(config-if)#ip address 10.0.0.1 255.255.255.252
R1(config-if)#encapsulation ppp
R1(config-if)#ppp authentication chap
R1(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to down

R1(config-if)#no shut
R1(config-if)#exit
R1(config)#do wr
Building configuration...
[OK]
R1(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up

R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console
```

Router 1

```
R2(config)#interface serial 0/3/0
R2(config-if)#ip address 10.0.0.2 255.255.255.252
R2(config-if)#encapsulation ppp
R2(config-if)#ppp authentication chap
R2(config-if)#no shut
R2(config-if)#exit
R2(config)#
```

Ping & Verify

```
R1#ping 10.0.0.2
```

```
Type escape sequence to abort.
```

```
Sending 5, 100-byte ICMP Echos to 10.0.0.2, timeout is 2 seconds:
```

```
!!!!
```

```
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/11/25 ms
```

```
R1#show interfaces serial 0/3/0
```

```
Serial0/3/0 is up, line protocol is up (connected)
```

```
Hardware is HD64570
```

```
Internet address is 10.0.0.1/30
```

```
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,  
reliability 255/255, txload 1/255, rxload 1/255
```

```
Encapsulation PPP, loopback not set, keepalive not set
```

```
LCP Open
```

```
Open: IPCP, CDPCP
```

```
Last input never, output never, output hang never
```

```
Last clearing of "show interface" counters never
```

```
Input queue: 0/75/0 (size/max/drops); Total output drops: 0
```

```
Queueing strategy: weighted fair
```

```
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
```

```
Conversations 0/0/256 (active/max active/max total)
```

```
Reserved Conversations 0/0 (allocated/max allocated)
```

```
Available Bandwidth 1158 kilobits/sec
```

```
5 minute input rate 5 bits/sec, 0 packets/sec
```

```
5 minute output rate 5 bits/sec, 0 packets/sec
```

```
10 packets input, 1280 bytes, 0 no buffer
```

```
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
```

```
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
```

```
10 packets output, 1280 bytes, 0 underruns
```

```
0 output errors, 0 collisions, 1 interface resets
```

```
0 output buffer failures, 0 output buffers swapped out
```

```
0 carrier transitions
```

```
DCD=up DSR=up DTR=up RTS=up CTS=up
```

```
R1#
```

```
R1#
```