


Task-1.Configure Management and Staff VLANs Set up two VLANs on a Cisco switch to logically separate startup departments. (Foundational — single concept, direct configuration.) Create VLAN 10 named Management and VLAN 20 named Staff on the switch. Assign specific access ports to each VLAN. Verify the VLAN assignments using show vlan brief.

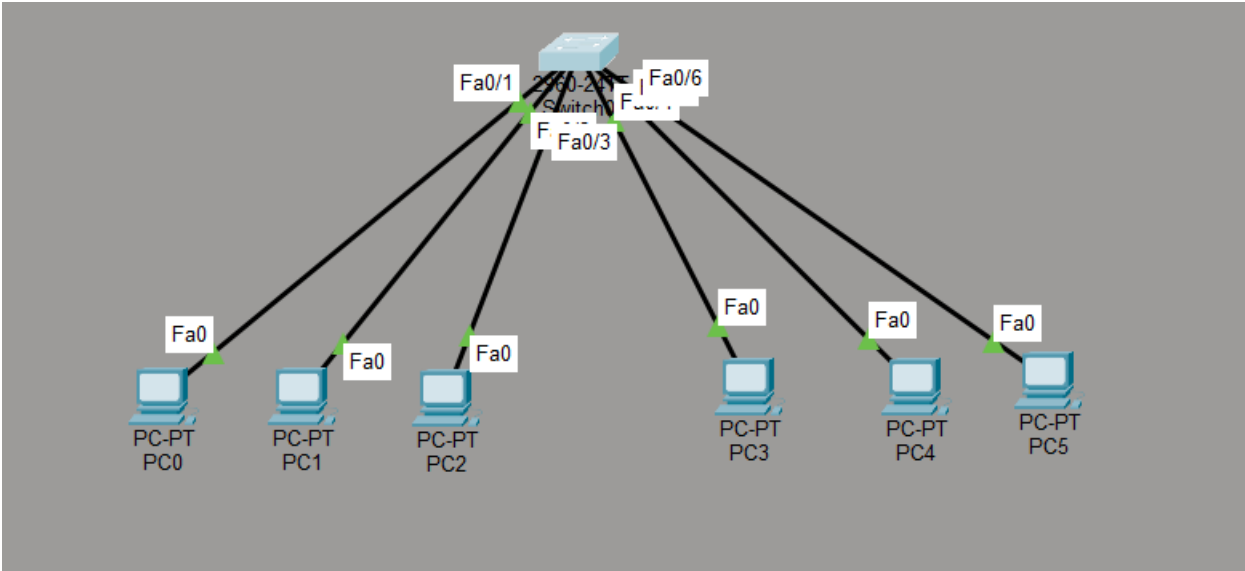

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name management
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name staff
Switch(config-vlan)#exit
Switch(config)#int range fa0/1-3
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 10
Switch(config-if-range)#exit
Switch(config)#int range fa0/4-6
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 20
Switch(config-if-range)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#show vlan brief
^
% Invalid input detected at '^' marker.

Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1, Gig0/2
10	management	active	Fa0/1, Fa0/2, Fa0/3
20	staff	active	Fa0/4, Fa0/5, Fa0/6
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
Switch#
```