


**Q-Simulate a Zomato-style delivery network: imagine Router1 represents an Ahmedabad branch and Router2 represents a Surat branch. Configure static routes so that devices in each city’s LAN can communicate with each other through the routers.**

The objective of this practical is to simulate a Zomato-style delivery network in Cisco Packet Tracer, where:

- **Router1 represents the Ahmedabad branch**
- **Router2 represents the Surat branch**
- Each branch has its own LAN.
- Static routes are configured so devices in Ahmedabad and Surat can communicate with each other through the routers.
- Connectivity is verified using the ping command.

**Network Topology**

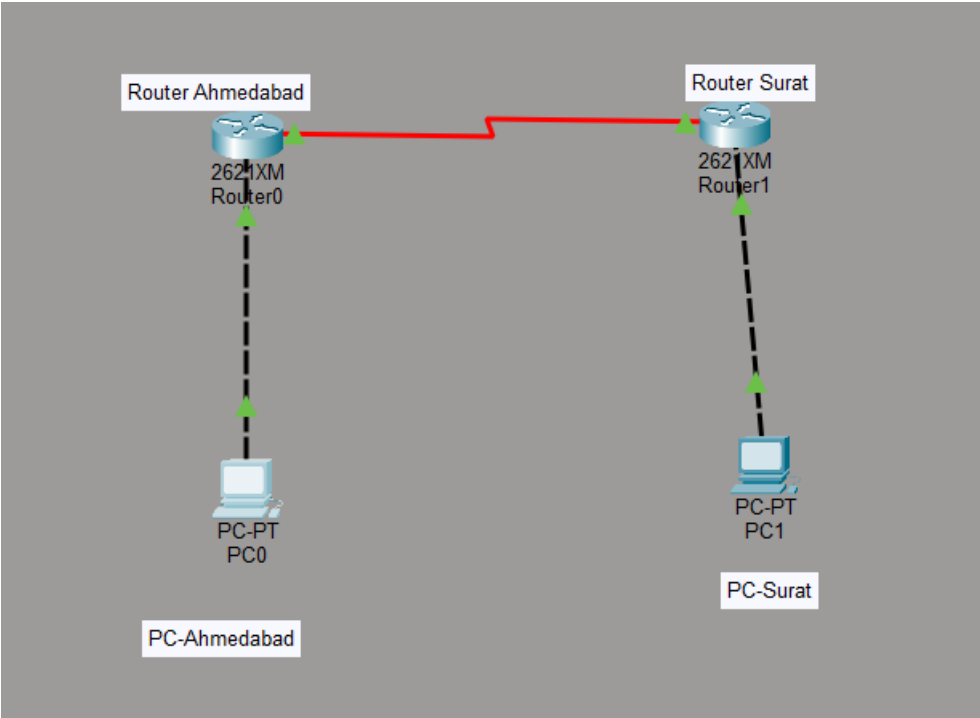

**IP Addressing Table**

| Device            | Interface       | IP Address    | Subnet Mask     |
|-------------------|-----------------|---------------|-----------------|
| Router1 Ahmedabad | FastEthernet0/0 | 192.168.10.1  | 255.255.255.0   |
| PC-Ahmedabad      | FastEthernet    | 192.168.10.10 | 255.255.255.0   |
| Router1 Ahmedabad | Serial0/0       | 10.0.0.1      | 255.255.255.252 |
| Router2 Surat     | Serial0/0       | 10.0.0.2      | 255.255.255.252 |
| Router2 Surat     | FastEthernet0/0 | 192.168.20.1  | 255.255.255.0   |
| PC-Surat          | FastEthernet    | 192.168.20.10 | 255.255.255.0   |

## Router0 – Ahmedabad Configuration

```
Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface fastethernet 0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface serial 0/0
Router(config-if)#ip address 10.0.0.1 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/0, changed state to down
Router(config-if)#exit
Router(config)#ip route 192.168.20.0 255.255.255.0 10.0.0.2
Router(config)#do wr
Building configuration...
[OK]
Router(config)#
```

## Router1 – Surat Configuration

```
Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface fastethernet 0/0
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface serial 0/0
Router(config-if)#ip address 10.0.0.2 255.255.255.252
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/0, changed state to up

Router(config-if)#exit
Router(config)#ip route 19
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/0, changed s
Router(config)#ip route 192.168.10.0 255.255.255.0 10.0.0.1
Router(config)#do wr
Building configuration...
[OK]
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
```

## Test Connectivity

```
C:\>ping 192.168.20.10

Pinging 192.168.20.10 with 32 bytes of data:

Reply from 192.168.20.10: bytes=32 time=1ms TTL=126
Reply from 192.168.20.10: bytes=32 time=10ms TTL=126
Reply from 192.168.20.10: bytes=32 time=11ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 11ms, Average = 6ms

C:\>
```

- ☐ **Ahmedabad LAN** represents Zomato's delivery operations and devices in Ahmedabad.
- ☐ **Surat LAN** represents Zomato's delivery operations and devices in Surat.
- ☐ **Router1** represents the Ahmedabad branch router.
- ☐ **Router2** represents the Surat branch router.
- ☐ The **serial connection** represents the communication link between the two cities.
- ☐ Static routes determine how traffic travels between the two city networks.