


Q-In Cisco Packet Tracer, configure two switches (Switch1 and Switch2) and connect them with a crossover cable. Set the FastEthernet0/1 port on both switches as trunk ports using the 802.1Q protocol.

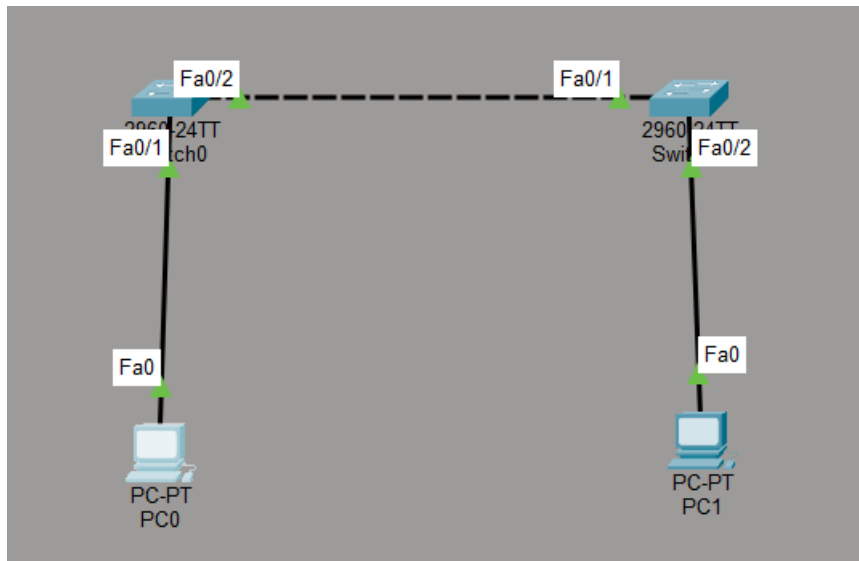

Switch 0

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Switch(config-if)#no shut
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)##SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/2 VLAN1.

%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/2 on VLAN0001. Inconsistent port type.

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show interfaces trunk
Port      Mode      Encapsulation  Status        Native vlan
Fa0/1     on        802.1q         trunking      1
Fa0/2     auto      n-802.1q       trunking      1

Port      Vlans allowed on trunk
Fa0/1     1-1005
Fa0/2     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1
Fa0/2     1

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1
Fa0/2     1

Switch#
```

Switch 1

```
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Switch(config-if)#no shut
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#Switch# show interfaces trunk
      ^
% Invalid input detected at '^' marker.

Switch#show interfaces trunk
Port      Mode           Encapsulation  Status        Native vlan
Fa0/1     on             802.1q         trunking      1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1

Switch#
```

I have connected Switch1 and Switch2 using a crossover cable through FastEthernet 0/1. I configured Fa0/1 on both switches as trunk ports. The trunk allows multiple VLAN traffic to travel between the two switches over a single physical link. The trunk uses the IEEE 802.1Q protocol for VLAN tagging.