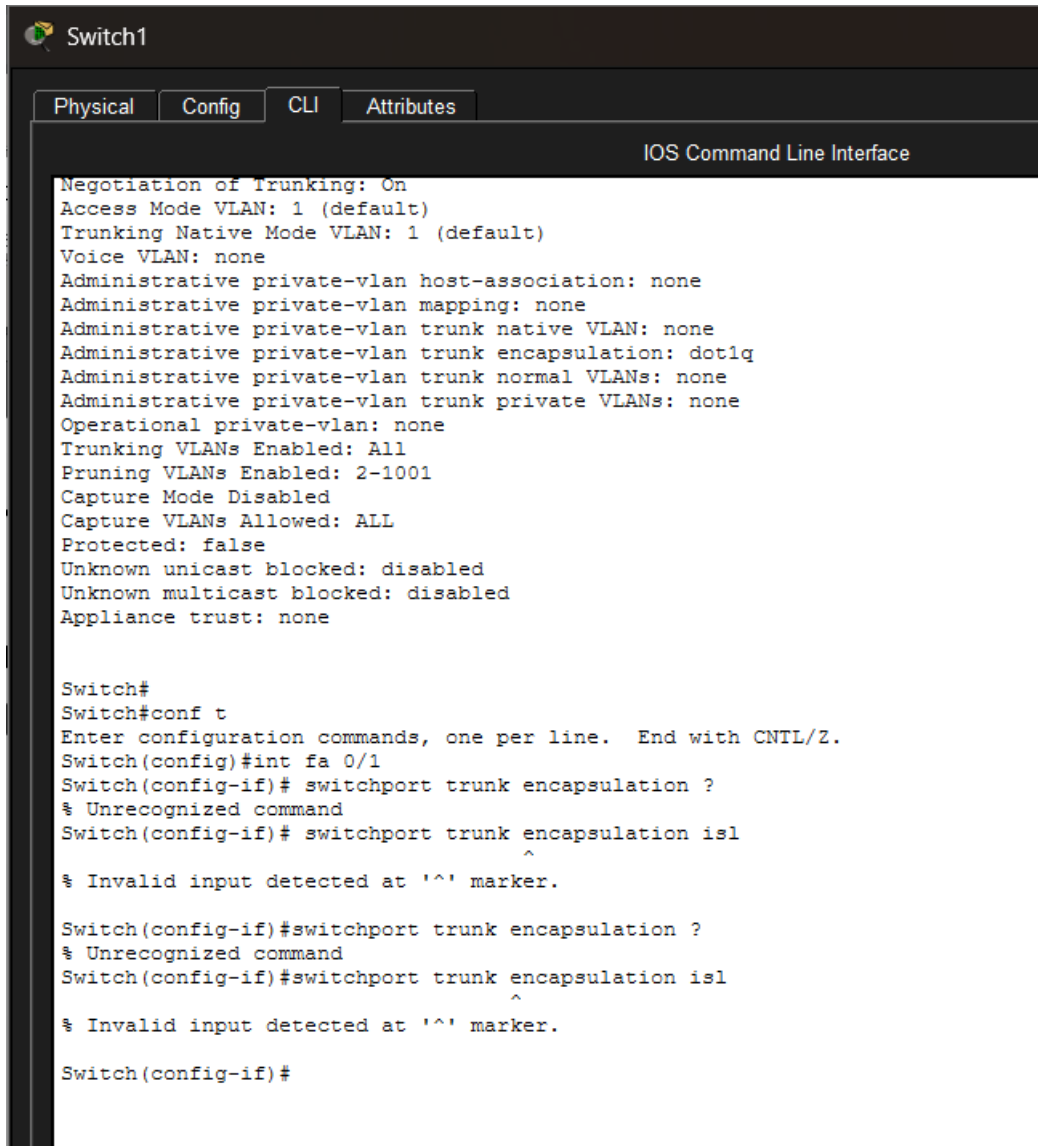


Q-Change the trunk encapsulation on the trunk link between Switch1 and Switch2 from 802.1Q to ISL, and test if VLAN traffic still passes between the switches.

Hint: Use the 'switchport trunk encapsulation isl' command before setting the port to trunk mode.

A screenshot of the Packet Tracer interface showing the configuration of Switch1. The top bar has tabs for Physical, Config, CLI, and Attributes, with the CLI tab selected. Below the tabs is a header for the 'IOS Command Line Interface'. The main area displays the output of the 'show interfaces' command, showing various status details for the interface. Below this, the configuration mode is entered, and the user attempts to set the trunk encapsulation to ISL on interface fa 0/1. The command is rejected with an error message indicating it is an unrecognized command.

```
Switch1
Physical Config CLI Attributes
IOS Command Line Interface
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled
Appliance trust: none

Switch#
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa 0/1
Switch(config-if)# switchport trunk encapsulation ?
% Unrecognized command
Switch(config-if)# switchport trunk encapsulation isl
^
% Invalid input detected at '^' marker.

Switch(config-if)#switchport trunk encapsulation ?
% Unrecognized command
Switch(config-if)#switchport trunk encapsulation isl
^
% Invalid input detected at '^' marker.

Switch(config-if)#
```

I attempted to change the trunk encapsulation from 802.1Q to ISL using the switchport trunk encapsulation isl command. However, the Packet Tracer multilayer switch used in this topology does not support ISL encapsulation, so the command was rejected. Therefore, VLAN traffic cannot be tested using ISL on this device.