



Q-Simulate a scenario where a new port on Switch2 (FastEthernet0/5) is accidentally set as a trunk port instead of an access port for VLAN 20. Observe and explain the impact on connectivity for a PC connected to that port.

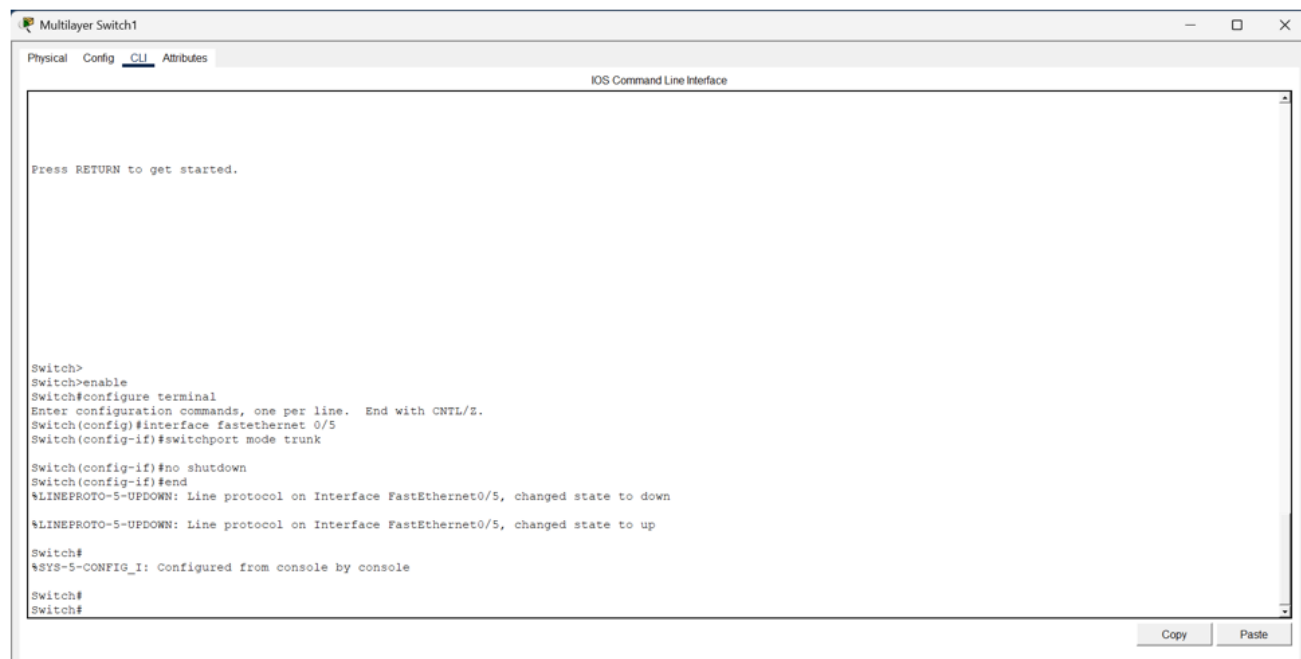

```
Switch>
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fastethernet 0/5
Switch(config-if)#switchport mode trunk

Switch(config-if)#no shutdown
Switch(config-if)#end
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#
Switch#
```

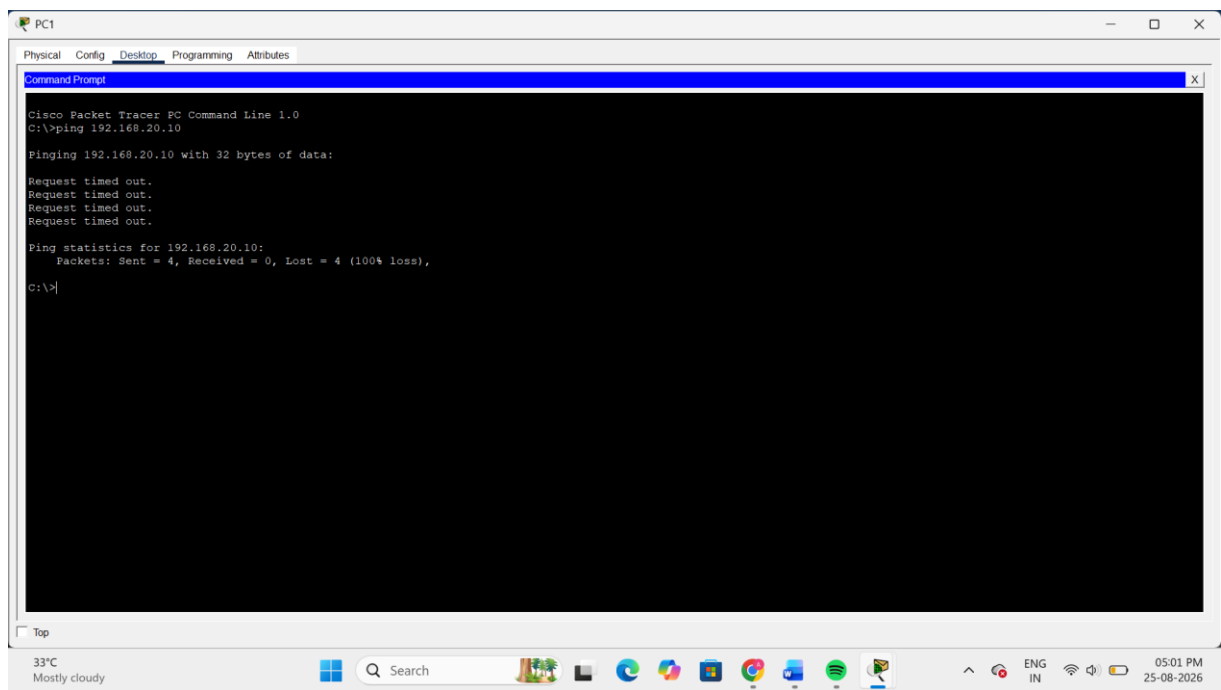

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.10

Pinging 192.168.20.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

When FastEthernet0/5 was accidentally configured as a trunk port instead of an access port for VLAN 20, the connected PC could not communicate normally with the VLAN 20 network. The ping failed with 100% packet loss because a normal PC sends untagged traffic and the port was incorrectly configured as a trunk. Configuring the port as an access port in VLAN 20 restores normal connectivity.