


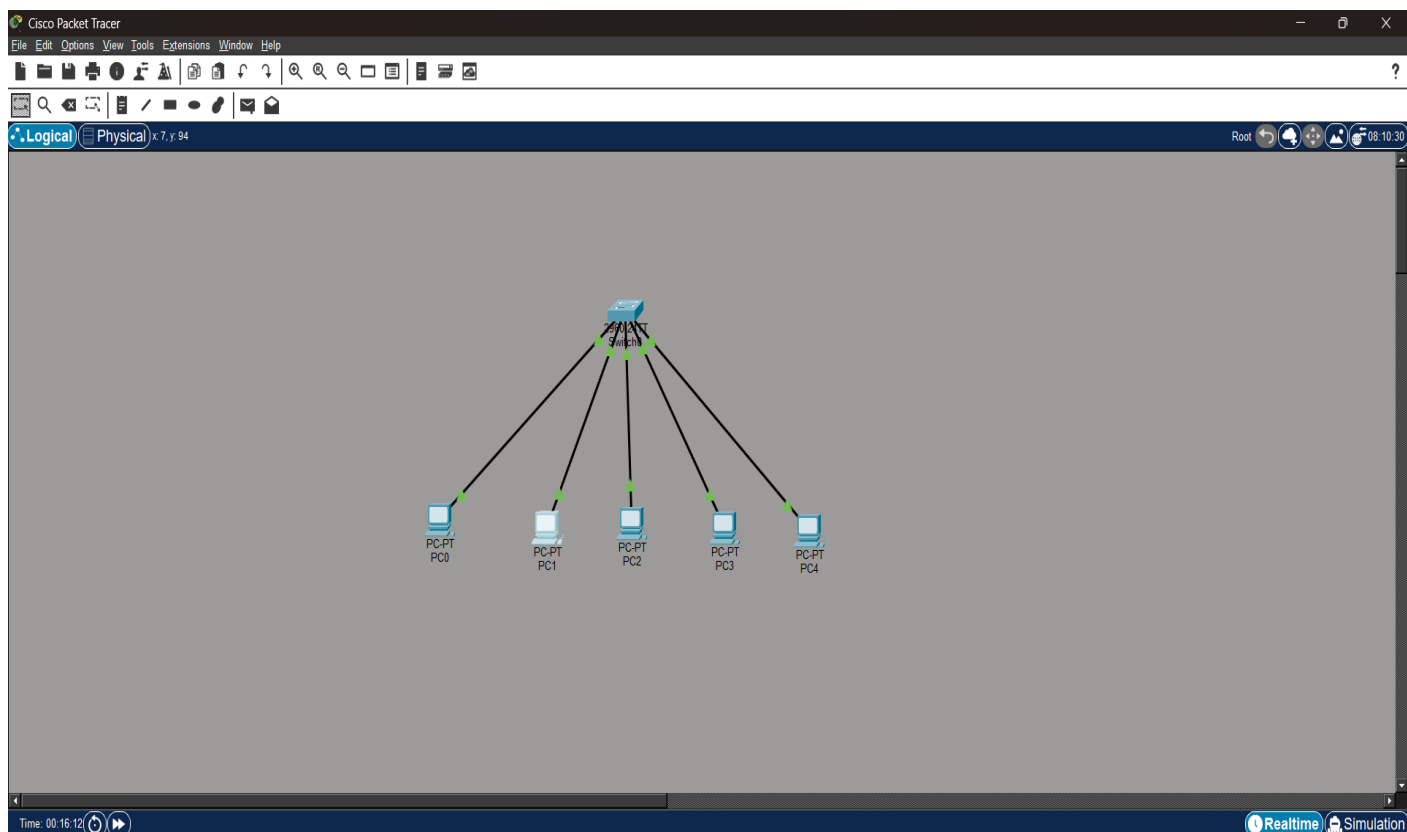

Switch0

PhysicalConfigCLIAttributes

```
Switch>
Switch#enable
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name sales
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name HR
Switch(config-vlan)#exit
Switch(config)#interface fa0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fa0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fa0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fa0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#interface fa0/5
Switch(config-if)#switchport mode access

% Invalid input detected at '^' marker.

Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vln 20

% Invalid input detected at '^' marker.

Switch(config-if)#switchport access vlan 20
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24, Gig0/1 Gig0/2
10 sales	active	Fa0/1, Fa0/2, Fa0/3
20 HR	active	Fa0/4, Fa0/5
1002 fddi-default	active	

CopyPaste

PC1

Physical Config Desktop Programming Attributes

Command Prompt

X

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.168.10.12

Pinging 192.168.10.12 with 32 bytes of data:

Reply from 192.168.10.12: bytes=32 time=1ms TTL=128

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.12:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>

Top

