


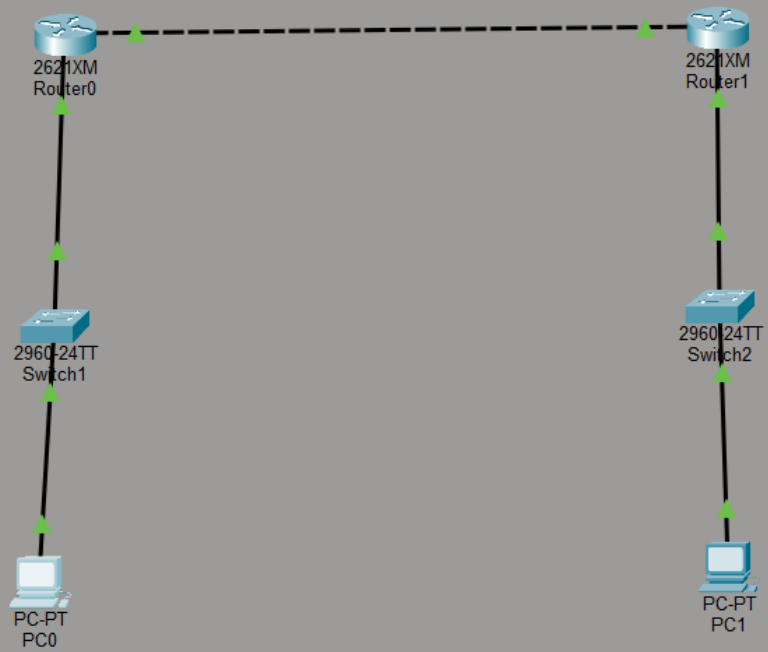

```
Router0
Physical Config CLI Attributes

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface g0/0
%Invalid interface type and number
Router(config)#interface fa0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface fa0/1
      ^
% Invalid input detected at '^' marker.

Router(config)#interface fa0/1
Router(config-if)#ip address 10.0.0.1 255.255.255.252
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router(config)#conf t
%Invalid hex value
Router(config)#ip route 192.168.2.0 255.255.255.0 10.0.0.2
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

    10.0.0.0/30 is subnetted, 1 subnets
C       10.0.0.0 is directly connected, FastEthernet0/1
C       192.168.1.0/24 is directly connected, FastEthernet0/0
S       192.168.2.0/24 [1/0] via 10.0.0.2

Router#
```

```
Router1
Physical Config CLI Attributes
100 (M) Cisco Software (C8000-1-1), Version 12.1(22), RELEASE SOFTWARE (100)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 27-Apr-04 19:01 by miwang

Cisco 2621 (MPC860) processor (revision 0x200) with 253952K/8192K bytes of memory

Processor board ID JAD05190MTZ (4292891495)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
1 Low-speed serial(sync/async) network interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: NO

Press RETURN to get started!

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface fa0/1
Router(config-if)#ip address 10.0.0.2 255.255.255.252
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#ip route 192.168.1.0 255.255.255.0 10.0.0.1
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
```

```
C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time<1ms TTL=126
Reply from 192.168.2.10: bytes=32 time=10ms TTL=126
Reply from 192.168.2.10: bytes=32 time=3ms TTL=126
Reply from 192.168.2.10: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 3ms

C:\>
```