


Q- Configure trunk ports between the switches to allow VLAN traffic to pass through. Verify trunking by using the show interfaces trunk command and submit a screenshot of the output.

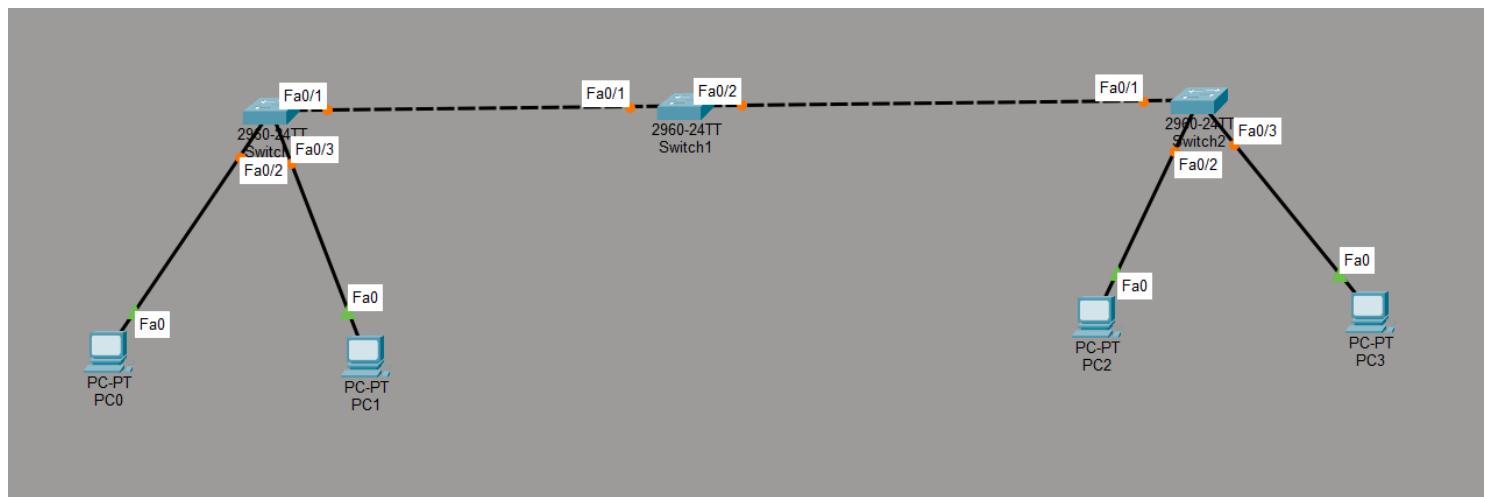

Switch0 Configuration

```
Switch(config)#int f 0/1
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#exit
Switch#
```

Switch1 Configuration

Switch1 connects to both Switch0 and Switch2, therefore both interfaces are configured as trunk ports.

```
Switch(config)#int f 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
Switch(config)#int f 0/2
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#
```

Switch2 Configuration

```
Switch(config)#int f 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#
```

Verification

Switch 0

```
Switch#show interfaces trunk
Port      Mode          Encapsulation  Status        Native vlan
Fa0/1     on            802.1q         trunking      1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1,10,20

Switch#
```

Switch 1

```
Switch#show interfaces trunk
Port      Mode          Encapsulation  Status        Native vlan
Fa0/1     on            802.1q         trunking      1
Fa0/2     on            802.1q         trunking      1

Port      Vlans allowed on trunk
Fa0/1     1-1005
Fa0/2     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20
Fa0/2     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1,10,20
Fa0/2     1,10,20
```

Switch 2

```
Switch#show interfaces trunk
Port      Mode          Encapsulation  Status        Native vlan
Fa0/1     on            802.1q         trunking      1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1,10,20
```

The trunk ports were successfully configured between Switch0, Switch1, and Switch2. The show interfaces trunk command verified that all switch-to-switch links are operating in trunking mode. Therefore, VLAN traffic can pass between the switches through the configured trunk links.