


Q- Assign IP addresses to each PC in your VLANs and set their default gateways to the corresponding router sub-interface IPs to enable inter-VLAN communication.

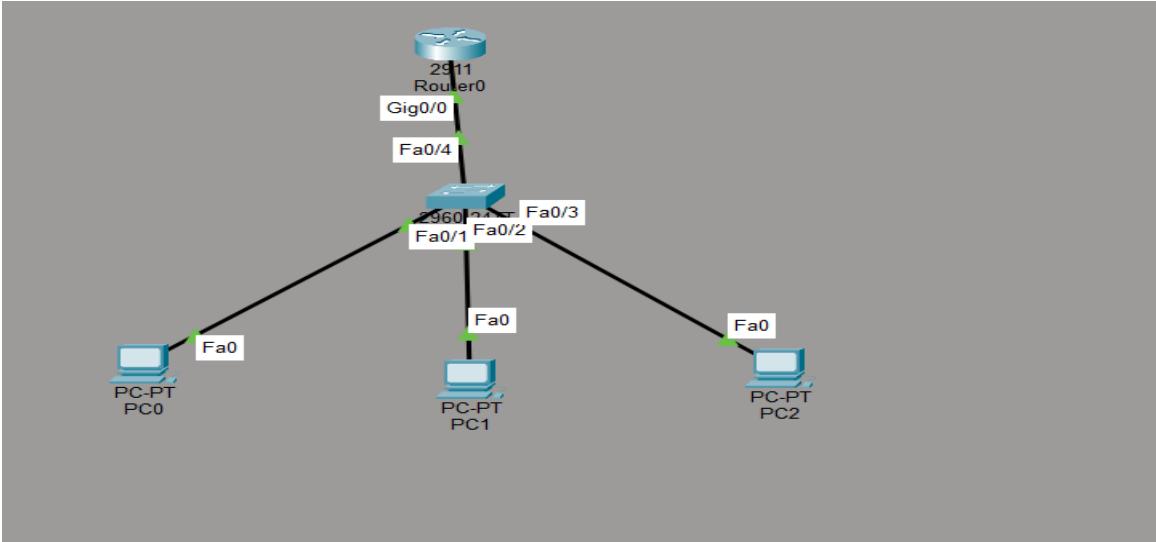

Switch#show vlan brief

VLAN Name	Status	Ports
1 default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gig0/1, Gig0/2
10 Foodies	active	Fa0/1
20 shoppers	active	Fa0/2
30 streamers	active	Fa0/3
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

PC	VLAN	IP Address	Subnet Mask	Default Gateway
PC0	Foodies (10)	192.168.10.10	255.255.255.0	192.168.10.1
PC1	Shoppers (20)	192.168.20.10	255.255.255.0	192.168.20.1
PC2	Streamers (30)	192.168.30.10	255.255.255.0	192.168.30.1

Ping Test PC 0 to PC 2

```
C:\>ping 192.168.30.10

Pinging 192.168.30.10 with 32 bytes of data:

Reply from 192.168.30.10: bytes=32 time<1ms TTL=127
Reply from 192.168.30.10: bytes=32 time<1ms TTL=127
Reply from 192.168.30.10: bytes=32 time=2ms TTL=127
Reply from 192.168.30.10: bytes=32 time=1ms TTL=127

Ping statistics for 192.168.30.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>
```