


Q- Simulate a scenario where users in the Shoppers VLAN (Flipkart) cannot ping users in the Streamers VLAN (Spotify). Identify and fix the misconfiguration causing the issue, then verify connectivity.

Hint: Check VLAN assignments, router sub-interface configurations, and trunk port settings.

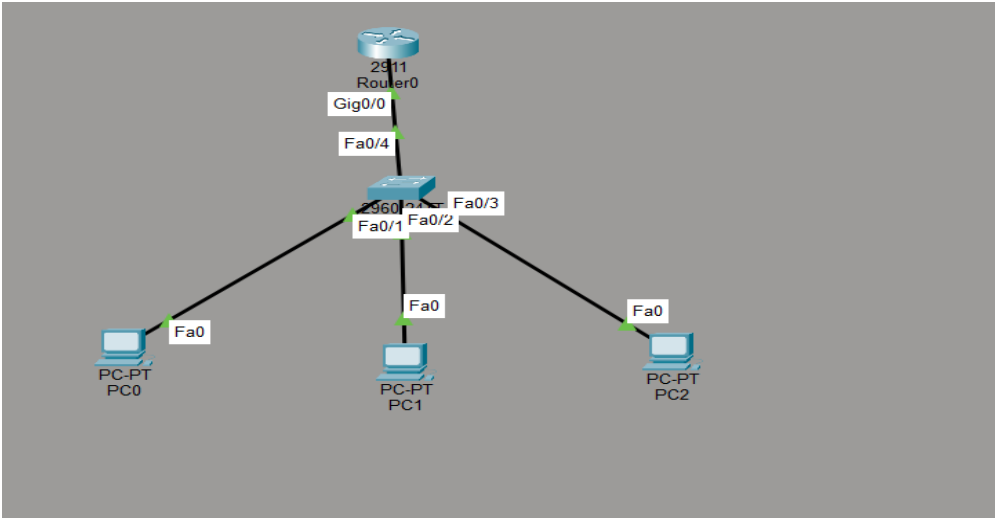

Check in switch

```
Switch#show interfaces trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/4     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/4     10,20

Port      Vlans allowed and active in management domain
Fa0/4     10,20

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/4     10,20

Switch#
```

Show only Vlan 10 and 20

```
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int f 0/4
Switch(config-if)#switchport trunk allowed vlan 10,20,30
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#
```

Add Vlan 30

```
Switch#show interfaces trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/4     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/4     10,20,30

Port      Vlans allowed and active in management domain
Fa0/4     10,20,30

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/4     10,20,30

Switch#
```

Ping Test for Vlan 30 PC

```
C:\>ping 192.168.30.10

Pinging 192.168.30.10 with 32 bytes of data:

Reply from 192.168.30.10: bytes=32 time<1ms TTL=127
Reply from 192.168.30.10: bytes=32 time=1ms TTL=127
Reply from 192.168.30.10: bytes=32 time<1ms TTL=127
Reply from 192.168.30.10: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.30.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```