


Q- In Cisco Packet Tracer, set up a simple network with a router, one internal PC, and one external PC. Assign private IP addresses to the internal PC and public IP addresses to the external PC, then configure static NAT on the router to allow the internal PC to communicate with the external PC.

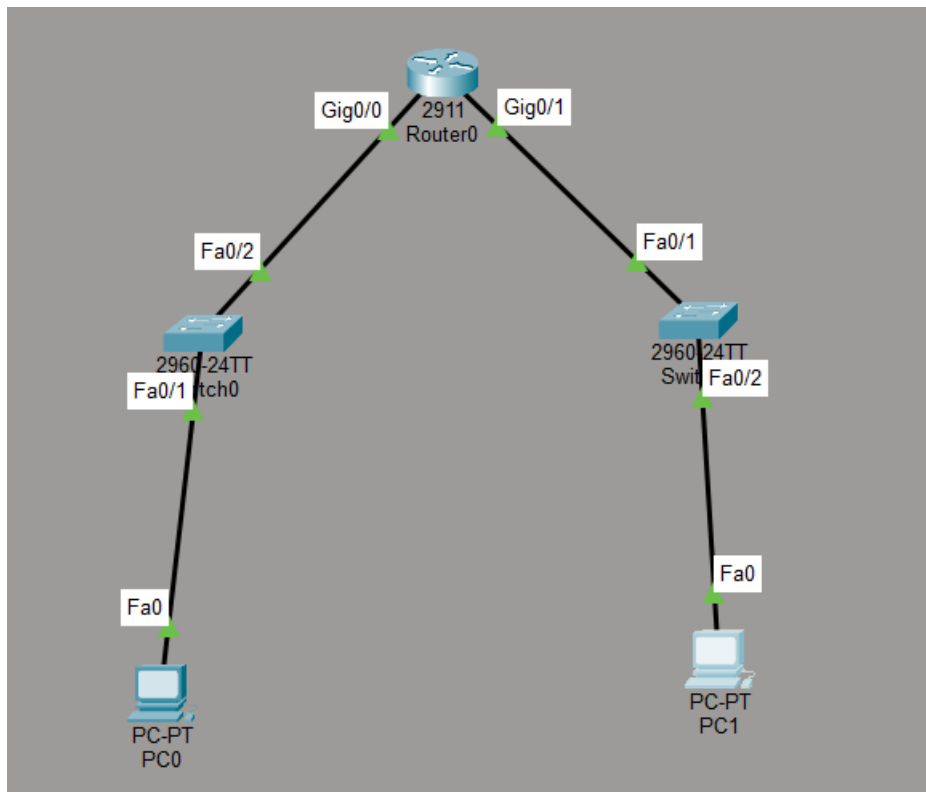

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#ip nat inside
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int g 0/1
Router(config-if)#ip address 203.0.113.1 255.255.255.0
Router(config-if)#ip nat outside
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#ip nat inside source static 192.168.1.10 203.0.113.2
Router(config)#do wr
Building configuration...
[OK]
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip nat translations
Pro  Inside global      Inside local      Outside local      Outside global
---  ---                ---              ---              ---
---  203.0.113.2         192.168.1.10     ---              ---
```

```
C:\>ping 203.0.113.10

Pinging 203.0.113.10 with 32 bytes of data:

Reply from 203.0.113.10: bytes=32 time<1ms TTL=127
Reply from 203.0.113.10: bytes=32 time=1ms TTL=127
Reply from 203.0.113.10: bytes=32 time<1ms TTL=127
Reply from 203.0.113.10: bytes=32 time<1ms TTL=127

Ping statistics for 203.0.113.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```