


**Q- Configure Port Address Translation (PAT) on a router in Packet Tracer so that two internal PCs with private IPs can access a simulated public web server using a single public IP address.

Hint: Use the 'ip nat inside source list' command with 'overload' to enable PAT.**

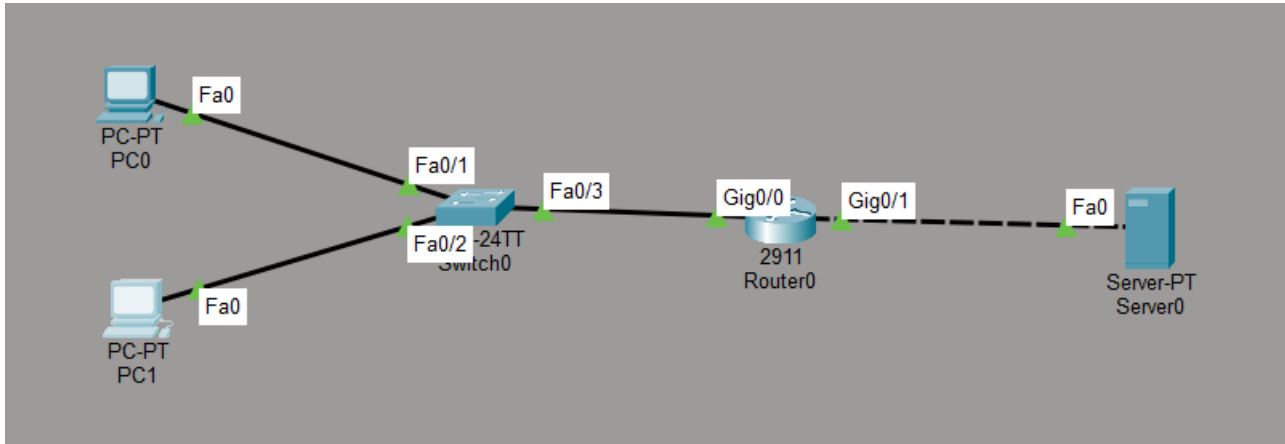

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#ip nat inside
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int g 0/1
Router(config-if)#ip address 200.1.1.1 255.255.255.0
Router(config-if)#ip nat outside
Router(config-if)#no shut


Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#access-list 1 permit 192.168.1.0 0.0.0.255
Router(config)#ip nat inside source list 1 interface gigabitEthernet 0/1 overload
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip nat translations
Pro  Inside global      Inside local      Outside local      Outside global
tcp 200.1.1.1:1025      192.168.1.10:1025 200.1.1.1:80      200.1.1.1:80

Router#
```

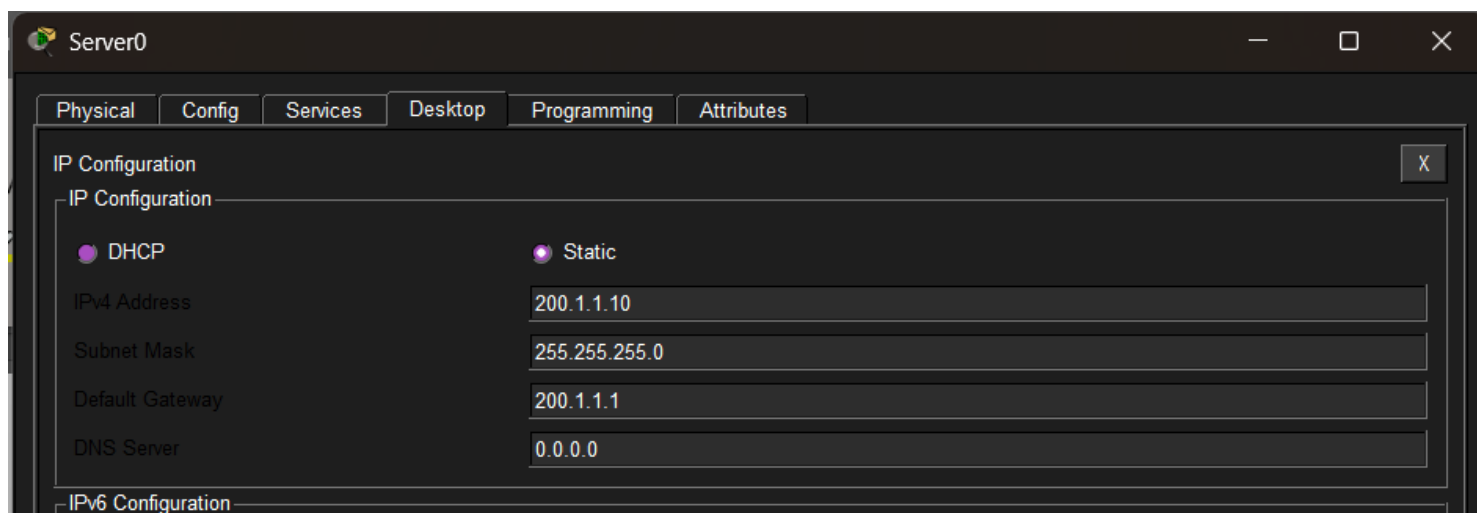

PC 0:

```
C:\>ping 200.1.1.10

Pinging 200.1.1.10 with 32 bytes of data:

Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time=1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127

Ping statistics for 200.1.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

